

OUTSIDE MICROMETER



WITH STAINLESS STEEL SPINDLE

DIN
863


- Strictly made in accordance with DIN 863
- Spindle thread hardened, ground and lapped for ultimate accuracy
- With spindle lock
- New special carbide used on measuring anvil instead of traditional easy-wear off carbide tip
- Precision Ground STAINLESS STEEL threading rod replacing alloy/carbon steel threading rod mostly used in the industry

Unit:mm

Code	Range	Graduation	A	B	C	L	W	H	Accuracy
4111-8105-A	0-25	0.01	31	29.5	φ6.5	133.8	58.5	φ18	0.004
4111-8110-A	25-50	0.01	56	38	φ6.5	160	76	φ18	0.004
4111-8115-A	50-75	0.01	81	51	φ6.5	185.5	91	φ18	0.005
4111-8120-A	75-100	0.01	106	63.5	φ6.5	210.5	105	φ18	0.005
4111-8125-A	100-125	0.01	131	76	φ6.5	237.3	125	φ18	0.006
4111-8130-A	125-150	0.01	156	89	φ6.5	263.8	142	φ18	0.006
4112-5105-A	0-1"	0.001"	31	29.5	φ6.5	133.8	58.5	φ18	0.00015"
4112-5110-A	1-2"	0.001"	56	38	φ6.5	160	76	φ18	0.00015"
4112-5115-A	2-3"	0.001"	81	51	φ6.5	185.5	91	φ18	0.0002"
4112-5120-A	3-4"	0.001"	106	63.5	φ6.5	210.5	105	φ18	0.0002"
4112-5125-A	4-5"	0.001"	131	76	φ6.5	237.3	125	φ18	0.00025"
4112-5130-A	5-6"	0.001"	156	89	φ6.5	263.8	142	φ18	0.00025"

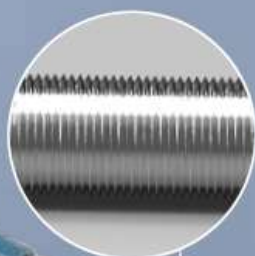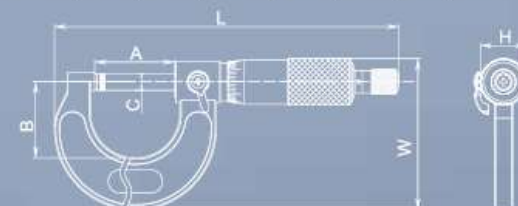

VS

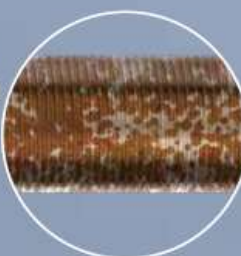

- Clear graduations laser-etched on satin chrome finish for easy reading

- With ratchet stop for constant force(5- 8N 20% better than the normal standard of 5-10N)

