



K-2 CARBIDE END MILLS

TiAlN-COATED SOLID CARBIDE END MILLS

General Purpose
Conventional / High Speed Milling
Wet / Dry Cutting

YG YG-1 CO., LTD.

HEAD OFFICE

211, Sewolcheon-ro, Bupyeong-gu, Incheon, South Korea

Phone: +82-32-526-0909

Http://www.yg1.kr

E-mail: yg1@yg1.kr

Note The information is provided for reference only. Tool specifications are subject to change without prior notice.
Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application.
YG-1 or publishers are not liable for any damage for use of the information.

     
Search 'YG-1' on social media outlets

YG1YEK2200107006

SELECTION GUIDE




| SERIES | G9624 | G9A70 | G9437 | G9438 |
|--------------------|-----------|-----------|-----------|-----------|
| FLUTE | 2 | 2 | 2 | 2 |
| HELIX ANGLE | 30° | 30° | ≈ 30° | ≈ 30° |
| CUTTING EDGE SHAPE | BALL NOSE | BALL NOSE | BALL NOSE | BALL NOSE |
| SIZE MIN | R1.0 | R0.5 | R1.0 | R1.0 |
| SIZE MAX | R10.0 | R10.0 | R10.0 | R10.0 |
| PAGE | 8 | 9 | 10 | 11 |

K-2 CARBIDE END MILLS


TiAIN-COATED SOLID CARBIDE END MILLS
 General Purpose
 Conventional / High Speed Milling
 Wet / Dry Cutting

◎ : Excellent ○ : Good

| ISO | VDI 3323 | Material Description | Composition / Structure / Heat Treatment | HB | HRc | G9624 | G9A70 | G9437 | G9438 |
|-----|---------------------|---|--|---------|-----|-------|-------|-------|-------|
| P | 1 | Non-alloy steel | About 0.15% C Annealed | 125 | | ◎ | ◎ | ◎ | ◎ |
| | 2 | | About 0.45% C Annealed | 190 | 13 | ◎ | ◎ | ◎ | ◎ |
| | 3 | | About 0.45% C Quenched & tempered | 250 | 25 | ◎ | ◎ | ◎ | ◎ |
| | 4 | | About 0.75% C Annealed | 270 | 28 | ◎ | ◎ | ◎ | ◎ |
| | 5 | | About 0.75% C Quenched & tempered | 300 | 32 | ◎ | ◎ | ◎ | ◎ |
| | 6 | Low alloy steel | Annealed | 180 | 10 | ◎ | ◎ | ◎ | ◎ |
| | 7 | | Quenched & tempered | 275 | 29 | ◎ | ◎ | ◎ | ◎ |
| | 8 | | Quenched & tempered | 300 | 32 | ◎ | ◎ | ◎ | ◎ |
| | 9 | | Quenched & tempered | 350 | 38 | ◎ | ◎ | ◎ | ◎ |
| | 10 | High alloyed steel, and tool steel | Annealed | 200 | 15 | ◎ | ◎ | ◎ | ◎ |
| | 11 | | Quenched & Tempered | 325 | 35 | ◎ | ◎ | ◎ | ◎ |
| M | 12 | Stainless steel | Ferritic / Martensitic Annealed | 200 | 15 | ○ | ○ | ○ | ○ |
| | 13 | | Martensitic Quenched & Tempered | 240 | 23 | ○ | ○ | ○ | ○ |
| | 14 | | Austenitic | 180 | 10 | ○ | ○ | ○ | ○ |
| K | 15 | Grey cast iron | Pearlitic / ferritic | 180 | 10 | ○ | ○ | ○ | ○ |
| | 16 | | Pearlitic (Martensitic) | 260 | 26 | ○ | ○ | ○ | ○ |
| | 17 | Nodular cast iron | Ferritic | 160 | 3 | ○ | ○ | ○ | ○ |
| | 18 | | Pearlitic | 250 | 25 | ○ | ○ | ○ | ○ |
| | 19 | | Ferritic | 130 | | ○ | ○ | ○ | ○ |
| 20 | Malleable cast iron | Pearlitic | 230 | 21 | ○ | ○ | ○ | ○ | |
| N | 21 | Aluminum-wrought alloy | Not Curable | 60 | | ○ | ○ | ○ | ○ |
| | 22 | | Curable Hardened | 100 | | ○ | ○ | ○ | ○ |
| | 23 | Aluminum-cast, alloyed | ≤ 12% Si, Not Curable | 75 | | ○ | ○ | ○ | ○ |
| | 24 | | ≤ 12% Si, Curable Hardened | 90 | | ○ | ○ | ○ | ○ |
| | 25 | | > 12% Si, Not Curable | 130 | | ○ | ○ | ○ | ○ |
| | 26 | Copper and Copper Alloys (Bronze / Brass) | Cutting Alloys, PB>1% | 110 | | ○ | ○ | ○ | ○ |
| | 27 | | CuZn, CuSnZn (Brass) | 90 | | ○ | ○ | ○ | ○ |
| | 28 | | CuSn, lead-free copper and electrolytic copper | 100 | | ○ | ○ | ○ | ○ |
| | 29 | Non Metallic Materials | Duroplastic, Fiber Reinforced Plastic | | | | | | |
| | 30 | | Rubber, Wood, etc. | | | | | | |
| S | 31 | Heat Resistant Super Alloys | Fe Based Annealed | 200 | 15 | ○ | ○ | ○ | ○ |
| | 32 | | Fe Based Cured | 280 | 30 | ○ | ○ | ○ | ○ |
| | 33 | | Fe Based Annealed | 250 | 25 | ○ | ○ | ○ | ○ |
| | 34 | | Ni or Co Based Cured | 350 | 38 | ○ | ○ | ○ | ○ |
| | 35 | Ni or Co Based Cast | 320 | 34 | ○ | ○ | ○ | ○ | |
| | 36 | Titanium Alloys | Pure Titanium | 400 Rm | | ○ | ○ | ○ | ○ |
| | 37 | | Alpha + Beta Alloys Hardened | 1050 Rm | | ○ | ○ | ○ | ○ |
| H | 38 | Hardened steel | Hardened | 550 | 55 | | | | |
| | 39 | | Hardened | 630 | 60 | | | | |
| | 40 | Chilled Cast Iron | Cast | 400 | 42 | ○ | ○ | ○ | ○ |
| | 41 | Hardened Cast Iron | Hardened | 550 | 55 | | | | |

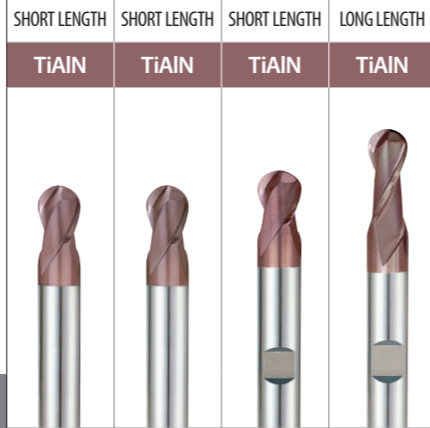

| G9454 | G9455 | G9B81 | G9634 | G9B82 | G9B83 | G9B84 | G9B85 | G9424 | G9G44 | G9A68 |
|------------|-------------------|----------------|--------------|---------------|---------------|---------------|---------------|--------------|---------------------------|--------------|
| 2 | 2 | 2 | 4 | 2 | 2 | 4 | 4 | 2 | 2 | 2 |
| 30° | 30° | 30° | 30° | 30° | 30° | 30° | 30° | 30° | 30° | 30° |
| BALL NOSE | BALL NOSE | BALL NOSE | BALL NOSE | CORNER RADIUS | CORNER RADIUS | CORNER RADIUS | CORNER RADIUS | SQUARE | SQUARE | SQUARE |
| R1.5 | R1.5 | R0.2 | R1.0 | D2.0 | D3.0 | D2.0 | D3.0 | D1.0 | D3.0 | D1.0 |
| R10.0 | R10.0 | R2.0 | R10.0 | D12.0 | D12.0 | D12.0 | D12.0 | D20.0 | D20.0 | D20.0 |
| 12 | 13 | 14 | 16 | 17 | 19 | 20 | 22 | 23 | 24 | 25 |
| LONG REACH | EXTRA LONG LENGTH | RIB PROCESSING | SHORT LENGTH | SHORT LENGTH | LONG REACH | SHORT LENGTH | LONG REACH | SHORT LENGTH | SHORT LENGTH WITH CHAMFER | SHORT LENGTH |
| TiAIN | TiAIN | TiAIN | TiAIN | TiAIN | TiAIN | TiAIN | TiAIN | TiAIN | TiAIN | TiAIN |

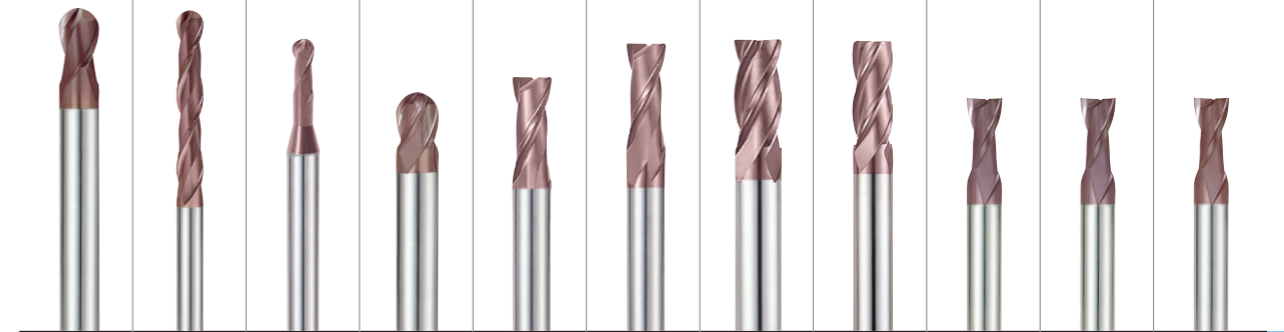

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|----|
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 1 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 2 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 3 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 4 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 5 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 6 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 7 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 8 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 9 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 10 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 11 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 12 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 13 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 14 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 15 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 16 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 17 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 18 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 19 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 20 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 21 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 22 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 23 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 24 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 25 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 26 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 27 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 28 |
| | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 29 |
| | | | | | | | | | | | | 30 |
| ○ | ○ | | ○ | | | | | ○ | ○ | ○ | ○ | 31 |
| ○ | ○ | | ○ | | | | | ○ | ○ | ○ | ○ | 32 |
| ○ | ○ | | ○ | | | | | ○ | ○ | ○ | ○ | 33 |
| ○ | ○ | | ○ | | | | | ○ | ○ | ○ | ○ | 34 |
| ○ | ○ | | ○ | | | | | ○ | ○ | ○ | ○ | 35 |
| ○ | ○ | | ○ | | | | | ○ | ○ | ○ | ○ | 36 |
| ○ | ○ | | ○ | | | | | ○ | ○ | ○ | ○ | 37 |
| | | | | | | | | | | | | 38 |
| | | | | | | | | | | | | 39 |
| ○ | ○ | | ○ | | | | | ○ | ○ | ○ | ○ | 40 |
| | | | | | | | | | | | | 41 |

SELECTION GUIDE




| SERIES | G9444 | G9527 | G9445 | G9G45 |
|--------------------|--------|--------|--------|--------|
| FLUTE | 2 | 2 | 2 | 2 |
| HELIX ANGLE | ≈ 30° | ≈ 30° | ≈ 30° | ≈ 30° |
| CUTTING EDGE SHAPE | SQUARE | SQUARE | SQUARE | SQUARE |
| SIZE MIN | D2.0 | D3.5 | D2.0 | D3.0 |
| SIZE MAX | D20.0 | D20.0 | D20.0 | D20.0 |
| PAGE | 26 | 27 | 28 | 30 |

K-2 CARBIDE END MILLS


TiAIN-COATED SOLID CARBIDE END MILLS
 General Purpose
 Conventional / High Speed Milling
 Wet / Dry Cutting

◎ : Excellent ○ : Good

| ISO | VDI 3323 | Material Description | Composition / Structure / Heat Treatment | HB | HRc | G9444 | G9527 | G9445 | G9G45 |
|-----|---------------------|---|--|---------|-----|-------|-------|-------|-------|
| P | 1 | Non-alloy steel | About 0.15% C Annealed | 125 | | ◎ | ◎ | ◎ | ◎ |
| | 2 | | About 0.45% C Annealed | 190 | 13 | ◎ | ◎ | ◎ | ◎ |
| | 3 | | About 0.45% C Quenched & tempered | 250 | 25 | ◎ | ◎ | ◎ | ◎ |
| | 4 | | About 0.75% C Annealed | 270 | 28 | ◎ | ◎ | ◎ | ◎ |
| | 5 | | About 0.75% C Quenched & tempered | 300 | 32 | ◎ | ◎ | ◎ | ◎ |
| | 6 | Low alloy steel | Annealed | 180 | 10 | ◎ | ◎ | ◎ | ◎ |
| | 7 | | Quenched & tempered | 275 | 29 | ◎ | ◎ | ◎ | ◎ |
| | 8 | | Quenched & tempered | 300 | 32 | ◎ | ◎ | ◎ | ◎ |
| | 9 | | Quenched & tempered | 350 | 38 | ◎ | ◎ | ◎ | ◎ |
| | 10 | High alloyed steel, and tool steel | Annealed | 200 | 15 | ◎ | ◎ | ◎ | ◎ |
| | 11 | | Quenched & Tempered | 325 | 35 | ◎ | ◎ | ◎ | ◎ |
| M | 12 | Stainless steel | Ferritic / Martensitic Annealed | 200 | 15 | ○ | ○ | ○ | ○ |
| | 13 | | Martensitic Quenched & Tempered | 240 | 23 | ○ | ○ | ○ | ○ |
| | 14 | | Austenitic | 180 | 10 | ○ | ○ | ○ | ○ |
| K | 15 | Grey cast iron | Pearlitic / ferritic | 180 | 10 | ○ | ○ | ○ | ○ |
| | 16 | | Pearlitic (Martensitic) | 260 | 26 | ○ | ○ | ○ | ○ |
| | 17 | Nodular cast iron | Ferritic | 160 | 3 | ○ | ○ | ○ | ○ |
| | 18 | | Pearlitic | 250 | 25 | ○ | ○ | ○ | ○ |
| | 19 | | Ferritic | 130 | | ○ | ○ | ○ | ○ |
| 20 | Malleable cast iron | Pearlitic | 230 | 21 | ○ | ○ | ○ | ○ | |
| N | 21 | Aluminum-wrought alloy | Not Curable | 60 | | ○ | ○ | ○ | ○ |
| | 22 | | Curable Hardened | 100 | | ○ | ○ | ○ | ○ |
| | 23 | Aluminum-cast, alloyed | ≤ 12% Si, Not Curable | 75 | | ○ | ○ | ○ | ○ |
| | 24 | | ≤ 12% Si, Curable Hardened | 90 | | ○ | ○ | ○ | ○ |
| | 25 | | > 12% Si, Not Curable | 130 | | ○ | ○ | ○ | ○ |
| | 26 | Copper and Copper Alloys (Bronze / Brass) | Cutting Alloys, PB>1% | 110 | | ○ | ○ | ○ | ○ |
| | 27 | | CuZn, CuSnZn (Brass) | 90 | | ○ | ○ | ○ | ○ |
| | 28 | | CuSn, lead-free copper and electrolytic copper | 100 | | ○ | ○ | ○ | ○ |
| | 29 | Non Metallic Materials | Duroplastic, Fiber Reinforced Plastic | | | ○ | ○ | ○ | ○ |
| | 30 | | Rubber, Wood, etc. | | | ○ | ○ | ○ | ○ |
| S | 31 | Heat Resistant Super Alloys | Fe Based Annealed | 200 | 15 | ○ | ○ | ○ | ○ |
| | 32 | | Fe Based Cured | 280 | 30 | ○ | ○ | ○ | ○ |
| | 33 | | Fe Based Annealed | 250 | 25 | ○ | ○ | ○ | ○ |
| | 34 | | Ni or Co Based Cured | 350 | 38 | ○ | ○ | ○ | ○ |
| | 35 | Ni or Co Based Cast | 320 | 34 | ○ | ○ | ○ | ○ | |
| | 36 | Titanium Alloys | Pure Titanium | 400 Rm | | ○ | ○ | ○ | ○ |
| | 37 | | Alpha + Beta Alloys Hardened | 1050 Rm | | ○ | ○ | ○ | ○ |
| H | 38 | Hardened steel | Hardened | 550 | 55 | | | | |
| | 39 | | Hardened | 630 | 60 | | | | |
| | 40 | Chilled Cast Iron | Cast | 400 | 42 | ○ | ○ | ○ | ○ |
| | 41 | Hardened Cast Iron | Hardened | 550 | 55 | | | | |

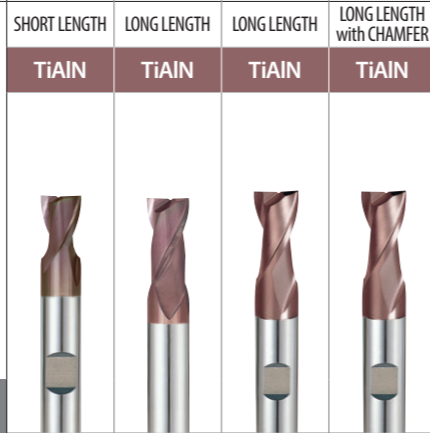

| G9452 | G9B80 | G9553 G9410 | G9G46 | G9425 | G9G47 | G9439 | G9528 | G9433 | G9G48 | G9447 |
|-------------------|----------------|-------------|-------------------------|--------------|---------------------------|--------------|-------------|-------------|--------------------------|-------------|
| 2 | 2 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| 30° | 30° | 30° | 30° | 30° | 30° | ≈ 30° | ≈ 30° | ≈ 30° | ≈ 30° | 45° |
| SQUARE | SQUARE | SQUARE | SQUARE | SQUARE | SQUARE | SQUARE | SQUARE | SQUARE | SQUARE | SQUARE |
| D3.0 | D0.4 | D0.5 | D3.0 | D1.0 | D3.0 | D2.0 | D3.5 | D3.0 | D3.0 | D3.0 |
| D20.0 | D4.0 | D20.0 | D20.0 | D20.0 | D20.0 | D20.0 | D20.0 | D20.0 | D20.0 | D20.0 |
| 31 | 32 | 35 | 37 | 38 | 39 | 40 | 41 | 42 | 43 | 44 |
| EXTRA LONG LENGTH | RIB PROCESSING | THROW AWAY | THROW AWAY with CHAMFER | SHORT LENGTH | SHORT LENGTH with CHAMFER | SHORT LENGTH | LONG LENGTH | LONG LENGTH | LONG LENGTH with CHAMFER | LONG LENGTH |
| TiAIN | TiAIN | TiAIN | TiAIN | TiAIN | TiAIN | TiAIN | TiAIN | TiAIN | TiAIN | TiAIN |

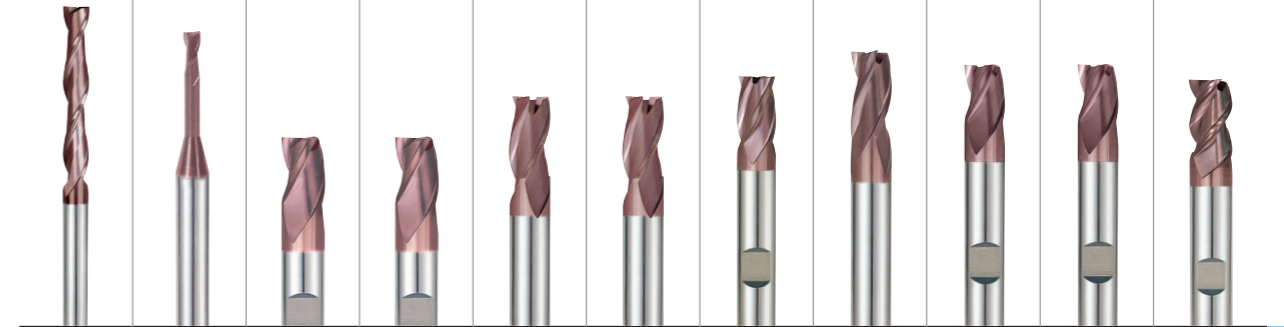

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|----|
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 1 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 2 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 3 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 4 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 5 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 6 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 7 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 8 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 9 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 10 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | 11 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 12 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 13 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 14 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 15 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 16 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 17 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 18 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 19 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 20 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 21 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 22 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 23 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 24 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 25 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 26 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 27 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 28 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 29 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 30 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 31 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 32 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 33 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 34 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 35 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 36 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 37 |
| | | | | | | | | | | | | 38 |
| | | | | | | | | | | | | 39 |
| ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | 40 |
| | | | | | | | | | | | | 41 |

SELECTION GUIDE



| SERIES | G9G49 | G9432 | G9G50 |
|--------------------|--------|--------|--------|
| FLUTE | 3 | 4 | 4 |
| HELIX ANGLE | 45° | 30° | 30° |
| CUTTING EDGE SHAPE | SQUARE | SQUARE | SQUARE |
| SIZE MIN | D3.0 | D1.0 | D3.0 |
| SIZE MAX | D20.0 | D20.0 | D20.0 |
| PAGE | 45 | 46 | 47 |


K-2 CARBIDE END MILLS

TiAlN-COATED SOLID CARBIDE END MILLS
 General Purpose
 Conventional / High Speed Milling
 Wet / Dry Cutting

◎ : Excellent ○ : Good

| ISO | VDI 3323 | Material Description | Composition / Structure / Heat Treatment | HB | HRc | G9G49 | G9432 | G9G50 |
|-----|---------------------|---|--|---------|-----|-------|-------|-------|
| P | 1 | Non-alloy steel | About 0.15% C Annealed | 125 | | ◎ | ◎ | ◎ |
| | 2 | | About 0.45% C Annealed | 190 | 13 | ◎ | ◎ | ◎ |
| | 3 | | About 0.45% C Quenched & tempered | 250 | 25 | ◎ | ◎ | ◎ |
| | 4 | | About 0.75% C Annealed | 270 | 28 | ◎ | ◎ | ◎ |
| | 5 | | About 0.75% C Quenched & tempered | 300 | 32 | ◎ | ◎ | ◎ |
| | 6 | Low alloy steel | Annealed | 180 | 10 | ◎ | ◎ | ◎ |
| | 7 | | Quenched & tempered | 275 | 29 | ◎ | ◎ | ◎ |
| | 8 | | Quenched & tempered | 300 | 32 | ◎ | ◎ | ◎ |
| | 9 | | Quenched & tempered | 350 | 38 | ◎ | ◎ | ◎ |
| | 10 | High alloyed steel, and tool steel | Annealed | 200 | 15 | ◎ | ◎ | ◎ |
| | 11 | | Quenched & Tempered | 325 | 35 | ◎ | ◎ | ◎ |
| M | 12 | Stainless steel | Ferritic / Martensitic Annealed | 200 | 15 | ○ | ○ | ○ |
| | 13 | | Martensitic Quenched & Tempered | 240 | 23 | ○ | ○ | ○ |
| | 14 | | Austenitic | 180 | 10 | ○ | ○ | ○ |
| K | 15 | Grey cast iron | Pearlitic / ferritic | 180 | 10 | ○ | ○ | ○ |
| | 16 | | Pearlitic (Martensitic) | 260 | 26 | ○ | ○ | ○ |
| | 17 | Nodular cast iron | Ferritic | 160 | 3 | ○ | ○ | ○ |
| | 18 | | Pearlitic | 250 | 25 | ○ | ○ | ○ |
| | 19 | | Ferritic | 130 | | ○ | ○ | ○ |
| 20 | Malleable cast iron | Pearlitic | 230 | 21 | ○ | ○ | ○ | |
| N | 21 | Aluminum-wrought alloy | Not Curable | 60 | | ○ | ○ | ○ |
| | 22 | | Curable Hardened | 100 | | ○ | ○ | ○ |
| | 23 | Aluminum-cast, alloyed | ≤ 12% Si, Not Curable | 75 | | ○ | ○ | ○ |
| | 24 | | ≤ 12% Si, Curable Hardened | 90 | | ○ | ○ | ○ |
| | 25 | | > 12% Si, Not Curable | 130 | | ○ | ○ | ○ |
| | 26 | Copper and Copper Alloys (Bronze / Brass) | Cutting Alloys, PB>1% | 110 | | ○ | ○ | ○ |
| | 27 | | CuZn, CuSnZn (Brass) | 90 | | ○ | ○ | ○ |
| | 28 | | CuSn, lead-free copper and electrolytic copper | 100 | | ○ | ○ | ○ |
| | 29 | Non Metallic Materials | Duroplastic, Fiber Reinforced Plastic | | | ○ | ○ | ○ |
| | 30 | | Rubber, Wood, etc. | | | | | |
| S | 31 | Heat Resistant Super Alloys | Fe Based Annealed | 200 | 15 | ○ | ○ | ○ |
| | 32 | | Fe Based Cured | 280 | 30 | ○ | ○ | ○ |
| | 33 | | Fe Based Annealed | 250 | 25 | ○ | ○ | ○ |
| | 34 | | Ni or Co Based Cured | 350 | 38 | ○ | ○ | ○ |
| | 35 | | Ni or Co Based Cast | 320 | 34 | ○ | ○ | ○ |
| | 36 | Titanium Alloys | Pure Titanium | 400 Rm | | ○ | ○ | ○ |
| | 37 | | Alpha + Beta Alloys Hardened | 1050 Rm | | ○ | ○ | ○ |
| H | 38 | Hardened steel | Hardened | 550 | 55 | | | |
| | 39 | | Hardened | 630 | 60 | | | |
| | 40 | Chilled Cast Iron | Cast | 400 | 42 | ○ | ○ | ○ |
| | 41 | Hardened Cast Iron | Hardened | 550 | 55 | | | |

| G9A69 | G9448 | G9540 | G9449 | G9G51 | G9453 | G9F45 G9F46 | G9A42 | G9400 |
|--------------|--------------|-------------|-------------|--------------------------|-------------------|--------------------------|-------------|------------|
| 4 | 4 | 4 | 4 | 4 | 4 | 4&6 | Multi Flute | 2 |
| 30° | ≈ 30° | ≈ 30° | ≈ 30° | ≈ 30° | 30° | 45° | 30° | 30° |
| SQUARE | SQUARE | SQUARE | SQUARE | SQUARE | SQUARE | SQUARE | ROUGHING | DRILL MILL |
| D1.0 | D2.0 | D3.5 | D2.0 | D3.0 | D3.0 | D3.0 | D6.0 | D3.0 |
| D20.0 | D20.0 | D20.0 | D20.0 | D20.0 | D20.0 | D20.0 | D25.0 | D20.0 |
| 48 | 49 | 50 | 51 | 52 | 53 | 54 | 55 | 56 |
| SHORT LENGTH | SHORT LENGTH | LONG LENGTH | LONG LENGTH | LONG LENGTH with CHAMFER | EXTRA LONG LENGTH | SHORT LENGTH LONG LENGTH | LONG LENGTH | - |
| TiAlN | TiAlN | TiAlN | TiAlN | TiAlN | TiAlN | TiAlN | X-Coating | TiAlN |

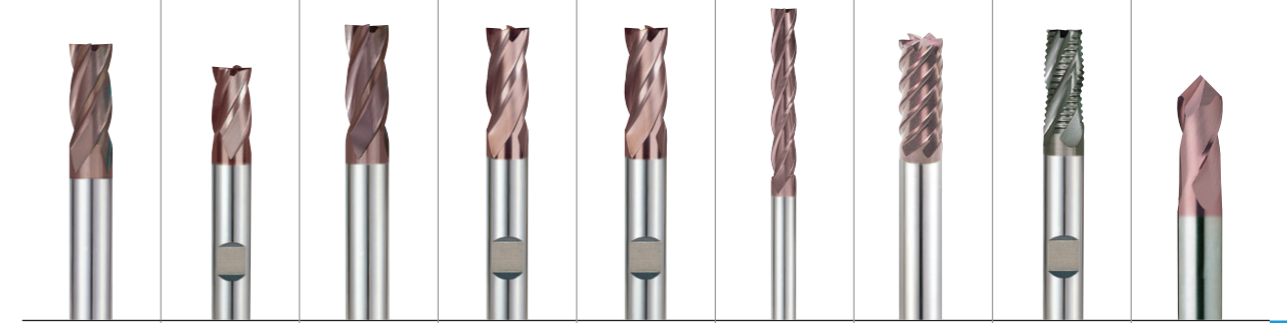


| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|----|
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ◎ | ◎ | 1 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ◎ | ◎ | 2 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ◎ | ◎ | 3 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ◎ | ◎ | 4 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ◎ | ◎ | 5 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ◎ | ◎ | 6 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ◎ | ◎ | 7 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ◎ | ◎ | 8 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ◎ | ◎ | 9 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ◎ | ◎ | 10 |
| ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ◎ | ◎ | 11 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 12 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 13 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 14 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 15 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 16 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 17 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 18 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 19 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 20 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 21 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 22 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 23 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 24 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 25 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 26 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 27 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 28 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 29 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 30 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 31 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 32 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 33 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 34 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 35 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 36 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 37 |
| | | | | | | | ○ | | 38 |
| | | | | | | | ○ | | 39 |
| ○ | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | 40 |
| | | | | | | | ○ | | 41 |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE SHORT LENGTH BALL NOSE

G9624 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

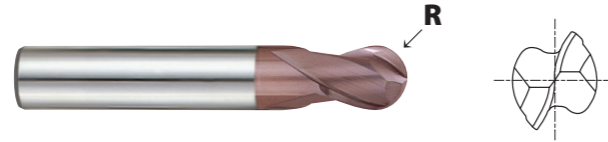

Unit : mm

| EDP No. | Radius of Ball Nose | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------------|---------------|----------------|---------------|----------------|
| | R (±0.02) | | | | |
| G9624020 | R1.0 | 2.0 | 6 | 4 | 48 |
| G9624025 | R1.25 | 2.5 | 6 | 4 | 48 |
| G9624030 | R1.5 | 3.0 | 6 | 4 | 48 |
| G9624040 | R2.0 | 4.0 | 6 | 6 | 50 |
| G9624901 | R2.0 | 4.0 | 4 | 12 | 40 |
| G9624050 | R2.5 | 5.0 | 6 | 7 | 51 |
| G9624902 | R2.5 | 5.0 | 5 | 14 | 50 |
| G9624060 | R3.0 | 6.0 | 6 | 7 | 51 |
| G9624080 | R4.0 | 8.0 | 8 | 9 | 59 |
| G9624100 | R5.0 | 10.0 | 10 | 10 | 60 |
| G9624120 | R6.0 | 12.0 | 12 | 14 | 71 |
| G9624140 | R7.0 | 14.0 | 14 | 14 | 71 |
| G9624160 | R8.0 | 16.0 | 16 | 16 | 76 |
| G9624180 | R9.0 | 18.0 | 18 | 18 | 76 |
| G9624200 | R10.0 | 20.0 | 20 | 20 | 82 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good



| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 35 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|------------------------|----|----|-----------------------------|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | | Heat Resistant Super Alloys | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 400 Rm | 1050 Rm | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE SHORT LENGTH BALL NOSE

G9A70 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

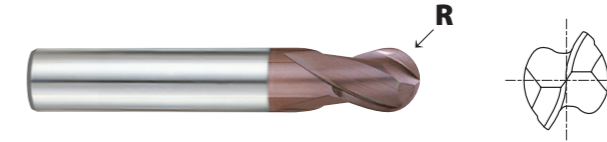

Unit : mm

| EDP No. | Radius of Ball Nose | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------------|---------------|----------------|---------------|----------------|
| | R (±0.02) | | | | |
| G9A70010 | R0.5 | 1.0 | 3 | 3 | 39 |
| G9A70015 | R0.75 | 1.5 | 3 | 5 | 39 |
| G9A70020 | R1.0 | 2.0 | 3 | 7 | 39 |
| G9A70025 | R1.25 | 2.5 | 3 | 8 | 39 |
| G9A70030 | R1.5 | 3.0 | 3 | 9 | 39 |
| G9A70040 | R2.0 | 4.0 | 4 | 14 | 51 |
| G9A70050 | R2.5 | 5.0 | 5 | 16 | 51 |
| G9A70060 | R3.0 | 6.0 | 6 | 19 | 64 |
| G9A70080 | R4.0 | 8.0 | 8 | 21 | 64 |
| G9A70100 | R5.0 | 10.0 | 10 | 22 | 70 |
| G9A70110 | R5.5 | 11.0 | 11 | 25 | 70 |
| G9A70120 | R6.0 | 12.0 | 12 | 25 | 76 |
| G9A70160 | R8.0 | 16.0 | 16 | 32 | 89 |
| G9A70200 | R10.0 | 20.0 | 20 | 38 | 102 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good



| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 35 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|------------------------|----|----|-----------------------------|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | | Heat Resistant Super Alloys | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 400 Rm | 1050 Rm | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE SHORT LENGTH BALL NOSE

G9437 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

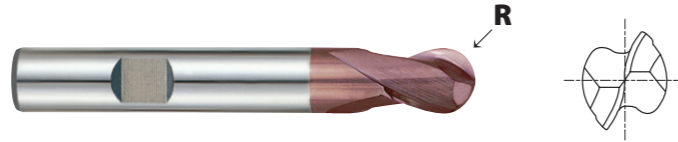

Unit : mm

| EDP No. | Radius of Ball Nose | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------------|---------------|----------------|---------------|----------------|
| | R (±0.02) | | | | |
| G9437020 | R1.0 | 2.0 | 6 | 3 | 50 |
| G9437030 | R1.5 | 3.0 | 6 | 4 | 50 |
| G9437040 | R2.0 | 4.0 | 6 | 5 | 54 |
| G9437050 | R2.5 | 5.0 | 6 | 6 | 54 |
| G9437060 | R3.0 | 6.0 | 6 | 7 | 54 |
| G9437080 | R4.0 | 8.0 | 8 | 9 | 58 |
| G9437100 | R5.0 | 10.0 | 10 | 11 | 66 |
| G9437120 | R6.0 | 12.0 | 12 | 12 | 73 |
| G9437140 | R7.0 | 14.0 | 14 | 14 | 75 |
| G9437180 | R9.0 | 18.0 | 18 | 18 | 84 |
| G9437200 | R10.0 | 20.0 | 20 | 20 | 92 |

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | | 13 | 25 | 28 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE LONG LENGTH BALL NOSE

G9438 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.



Unit : mm

| EDP No. | Radius of Ball Nose | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------------|---------------|----------------|---------------|----------------|
| | R (±0.02) | | | | |
| G9438020 | R1.0 | 2.0 | 3 | 6 | 38 |
| G9438030 | R1.5 | 3.0 | 6 | 7 | 57 |
| G9438040 | R2.0 | 4.0 | 6 | 8 | 57 |
| G9438050 | R2.5 | 5.0 | 6 | 10 | 57 |
| G9438060 | R3.0 | 6.0 | 6 | 10 | 57 |
| G9438080 | R4.0 | 8.0 | 8 | 16 | 63 |
| G9438100 | R5.0 | 10.0 | 10 | 19 | 72 |
| G9438120 | R6.0 | 12.0 | 12 | 22 | 83 |
| G9438140 | R7.0 | 14.0 | 14 | 22 | 83 |
| G9438160 | R8.0 | 16.0 | 16 | 26 | 92 |
| G9438180 | R9.0 | 18.0 | 18 | 26 | 92 |
| G9438200 | R10.0 | 20.0 | 20 | 32 | 104 |

● with plain shank

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | | 13 | 25 | 28 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE LONG REACH BALL NOSE

G9454 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

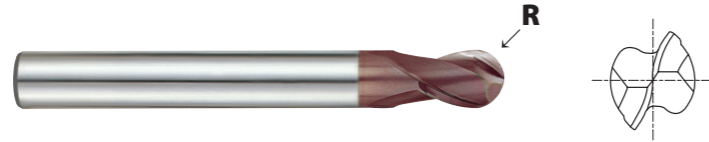

Unit : mm

| EDP No. | Radius of Ball Nose | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------------|---------------|----------------|---------------|----------------|
| | R (±0.02) | | | | |
| G9454030 | R1.5 | 3.0 | 3 | 5 | 75 |
| G9454040 | R2.0 | 4.0 | 4 | 8 | 75 |
| G9454050 | R2.5 | 5.0 | 5 | 9 | 75 |
| G9454060 | R3.0 | 6.0 | 6 | 10 | 100 |
| G9454080 | R4.0 | 8.0 | 8 | 12 | 100 |
| G9454100 | R5.0 | 10.0 | 10 | 14 | 100 |
| G9454120 | R6.0 | 12.0 | 12 | 16 | 100 |
| G9454140 | R7.0 | 14.0 | 14 | 18 | 100 |
| G9454160 | R8.0 | 16.0 | 16 | 22 | 150 |
| G9454200 | R10.0 | 20.0 | 20 | 26 | 150 |

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good



| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 35 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 15 | 30 | 25 | 38 | 34 | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE EXTRA LONG LENGTH BALL NOSE

G9455 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

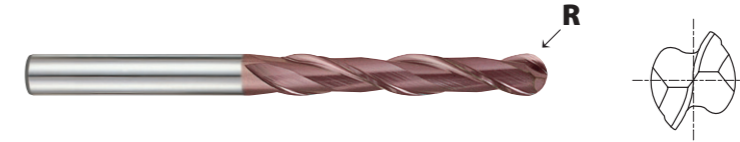

Unit : mm

| EDP No. | Radius of Ball Nose | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------------|---------------|----------------|---------------|----------------|
| | R (±0.02) | | | | |
| G9455903 | R1.5 | 3.0 | 3 | 20 | 60 |
| G9455030 | R1.5 | 3.0 | 3 | 30 | 75 |
| G9455904 | R2.0 | 4.0 | 4 | 20 | 60 |
| G9455040 | R2.0 | 4.0 | 4 | 30 | 75 |
| G9455905 | R2.5 | 5.0 | 5 | 25 | 75 |
| G9455050 | R2.5 | 5.0 | 5 | 40 | 100 |
| G9455906 | R3.0 | 6.0 | 6 | 30 | 75 |
| G9455060 | R3.0 | 6.0 | 6 | 50 | 150 |
| G9455908 | R4.0 | 8.0 | 8 | 30 | 75 |
| G9455080 | R4.0 | 8.0 | 8 | 50 | 150 |
| G9455910 | R5.0 | 10.0 | 10 | 40 | 100 |
| G9455100 | R5.0 | 10.0 | 10 | 60 | 150 |
| G9455912 | R6.0 | 12.0 | 12 | 45 | 100 |
| G9455120 | R6.0 | 12.0 | 12 | 75 | 150 |
| G9455914 | R7.0 | 14.0 | 14 | 45 | 100 |
| G9455140 | R7.0 | 14.0 | 14 | 75 | 150 |
| G9455916 | R8.0 | 16.0 | 16 | 45 | 100 |
| G9455160 | R8.0 | 16.0 | 16 | 75 | 150 |
| G9455918 | R9.0 | 18.0 | 18 | 45 | 100 |
| G9455180 | R9.0 | 18.0 | 18 | 75 | 150 |
| G9455920 | R10.0 | 20.0 | 20 | 45 | 100 |
| G9455200 | R10.0 | 20.0 | 20 | 75 | 150 |

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 35 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 15 | 30 | 25 | 38 | 34 | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE BALL NOSE RIB PROCESSING

G9B81 PLAIN SHANK

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- Designed for milling of radius bottom slots, fillets and special contours.

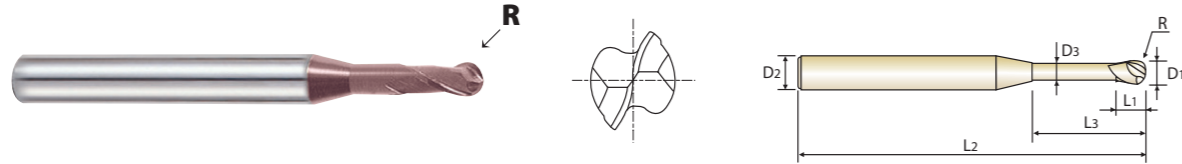

| EDP No. | Radius of Ball Nose | Mill Diameter | Shank Diameter | Length of Cut | Length Below Shank | Overall Length | Neck Diameter |
|----------|---------------------|---------------|----------------|---------------|--------------------|----------------|---------------|
| | R (±0.02) | D1 | D2 | L1 | L3 | L2 | D3 |
| G9B81004 | R0.2 | 0.4 | 4 | 0.7 | 2 | 50 | 0.37 |
| G9B81005 | R0.25 | 0.5 | 4 | 0.75 | 2 | 50 | 0.45 |
| G9B81901 | R0.25 | 0.5 | 4 | 0.75 | 4 | 50 | 0.45 |
| G9B81902 | R0.25 | 0.5 | 4 | 0.75 | 6 | 50 | 0.45 |
| G9B81006 | R0.3 | 0.6 | 4 | 0.9 | 2 | 50 | 0.55 |
| G9B81903 | R0.3 | 0.6 | 4 | 0.9 | 4 | 50 | 0.55 |
| G9B81904 | R0.3 | 0.6 | 4 | 0.9 | 6 | 50 | 0.55 |
| G9B81008 | R0.4 | 0.8 | 4 | 1.2 | 4 | 50 | 0.75 |
| G9B81905 | R0.4 | 0.8 | 4 | 1.2 | 6 | 50 | 0.75 |
| G9B81906 | R0.4 | 0.8 | 4 | 1.2 | 8 | 50 | 0.75 |
| G9B81010 | R0.5 | 1.0 | 4 | 1.5 | 6 | 50 | 0.95 |
| G9B81907 | R0.5 | 1.0 | 4 | 1.5 | 8 | 50 | 0.95 |
| G9B81908 | R0.5 | 1.0 | 4 | 1.5 | 10 | 50 | 0.95 |
| G9B81909 | R0.5 | 1.0 | 4 | 1.5 | 12 | 50 | 0.95 |
| G9B81012 | R0.6 | 1.2 | 4 | 1.8 | 8 | 50 | 1.15 |
| G9B81910 | R0.6 | 1.2 | 4 | 1.8 | 12 | 50 | 1.15 |
| G9B81014 | R0.7 | 1.4 | 4 | 2.1 | 16 | 50 | 1.35 |
| G9B81015 | R0.75 | 1.5 | 4 | 2.3 | 6 | 50 | 1.45 |
| G9B81911 | R0.75 | 1.5 | 4 | 2.3 | 8 | 50 | 1.45 |
| G9B81912 | R0.75 | 1.5 | 4 | 2.3 | 10 | 50 | 1.45 |
| G9B81913 | R0.75 | 1.5 | 4 | 2.3 | 12 | 50 | 1.45 |
| G9B81914 | R0.75 | 1.5 | 4 | 2.3 | 16 | 50 | 1.45 |

Unit : mm

► NEXT PAGE

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 38 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |

| ISO Material Description | N | | | | | S | | | | | H | | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|-----|---|----|-----|------------------------|----|-----------------------------|-----|-----|-----|-----|-----------------|---------|----------------|-----|-------------------|-----|--------------------|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | | Titanium Alloys | | Hardened steel | | Chilled Cast Iron | | Hardened Cast Iron |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 | |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 | |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 | |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | | | | | | | | | | |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE BALL NOSE RIB PROCESSING

G9B81 PLAIN SHANK

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- Designed for milling of radius bottom slots, fillets and special contours.

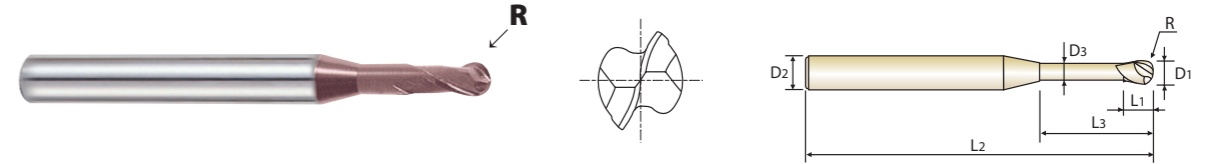

| EDP No. | Radius of Ball Nose | Mill Diameter | Shank Diameter | Length of Cut | Length Below Shank | Overall Length | Neck Diameter |
|----------|---------------------|---------------|----------------|---------------|--------------------|----------------|---------------|
| | R (±0.02) | D1 | D2 | L1 | L3 | L2 | D3 |
| G9B81915 | R0.75 | 1.5 | 4 | 2.3 | 20 | 50 | 1.45 |
| G9B81016 | R0.8 | 1.6 | 4 | 2.4 | 8 | 50 | 1.55 |
| G9B81916 | R0.8 | 1.6 | 4 | 2.4 | 12 | 50 | 1.55 |
| G9B81917 | R0.8 | 1.6 | 4 | 2.4 | 16 | 50 | 1.55 |
| G9B81918 | R0.8 | 1.6 | 4 | 2.4 | 20 | 50 | 1.55 |
| G9B81020 | R1.0 | 2.0 | 4 | 3 | 8 | 50 | 1.95 |
| G9B81919 | R1.0 | 2.0 | 4 | 3 | 10 | 50 | 1.95 |
| G9B81920 | R1.0 | 2.0 | 4 | 3 | 12 | 50 | 1.95 |
| G9B81921 | R1.0 | 2.0 | 4 | 3 | 14 | 50 | 1.95 |
| G9B81922 | R1.0 | 2.0 | 4 | 3 | 16 | 50 | 1.95 |
| G9B81923 | R1.0 | 2.0 | 4 | 3 | 20 | 50 | 1.95 |
| G9B81030 | R1.5 | 3.0 | 6 | 4.5 | 10 | 50 | 2.85 |
| G9B81924 | R1.5 | 3.0 | 6 | 4.5 | 12 | 50 | 2.85 |
| G9B81925 | R1.5 | 3.0 | 6 | 4.5 | 16 | 60 | 2.85 |
| G9B81926 | R1.5 | 3.0 | 6 | 4.5 | 20 | 60 | 2.85 |
| G9B81927 | R1.5 | 3.0 | 6 | 4.5 | 25 | 75 | 2.85 |
| G9B81040 | R2.0 | 4.0 | 6 | 6 | 12 | 50 | 3.85 |
| G9B81928 | R2.0 | 4.0 | 6 | 6 | 16 | 60 | 3.85 |
| G9B81929 | R2.0 | 4.0 | 6 | 6 | 20 | 75 | 3.85 |
| G9B81930 | R2.0 | 4.0 | 6 | 6 | 25 | 75 | 3.85 |
| G9B81931 | R2.0 | 4.0 | 6 | 6 | 30 | 75 | 3.85 |

Unit : mm

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 38 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |

| ISO Material Description | N | | | | | S | | | | | H | | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|-----|---|----|-----|------------------------|----|-----------------------------|-----|-----|-----|-----|-----------------|---------|----------------|-----|-------------------|-----|--------------------|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | | Titanium Alloys | | Hardened steel | | Chilled Cast Iron | | Hardened Cast Iron |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 | |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 | |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 | |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | | | | | | | | | | |

TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH BALL NOSE

G9634 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

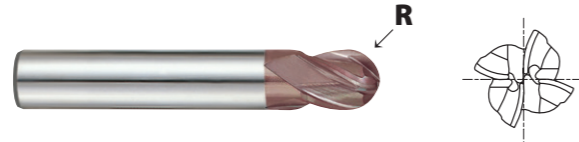

Unit : mm

| EDP No. | Radius of Ball Nose | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------------|---------------|----------------|---------------|----------------|
| | R (±0.02) | | | | |
| G9634020 | R1.0 | 2.0 | 6 | 4 | 48 |
| G9634030 | R1.5 | 3.0 | 6 | 4 | 48 |
| G9634040 | R2.0 | 4.0 | 6 | 6 | 50 |
| G9634050 | R2.5 | 5.0 | 6 | 7 | 51 |
| G9634060 | R3.0 | 6.0 | 6 | 7 | 51 |
| G9634080 | R4.0 | 8.0 | 8 | 9 | 59 |
| G9634100 | R5.0 | 10.0 | 10 | 10 | 60 |
| G9634120 | R6.0 | 12.0 | 12 | 14 | 71 |
| G9634140 | R7.0 | 14.0 | 14 | 14 | 71 |
| G9634160 | R8.0 | 16.0 | 16 | 16 | 76 |
| G9634180 | R9.0 | 18.0 | 18 | 18 | 76 |
| G9634200 | R10.0 | 20.0 | 20 | 20 | 82 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|-----|------------------------|----|-----------------------------|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | | Non Metallic Materials | | Heat Resistant Super Alloys | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 55 | | |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE SHORT LENGTH CORNER RADIUS

G9B82 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

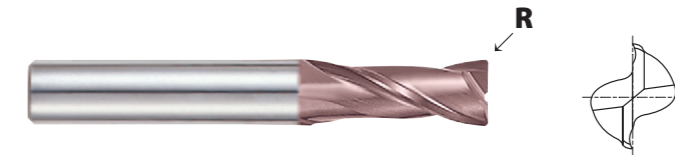

Unit : mm

| EDP No. | Corner Radius | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|---------------|----------------|---------------|----------------|
| | R | | | | |
| G9B82020 | R0.2 | 2.0 | 4 | 4 | 50 |
| G9B82901 | R0.3 | 2.0 | 4 | 4 | 50 |
| G9B82902 | R0.5 | 2.0 | 4 | 4 | 50 |
| G9B82025 | R0.2 | 2.5 | 4 | 5 | 50 |
| G9B82903 | R0.3 | 2.5 | 4 | 5 | 50 |
| G9B82904 | R0.5 | 2.5 | 4 | 5 | 50 |
| G9B82030 | R0.2 | 3.0 | 4 | 6 | 50 |
| G9B82905 | R0.3 | 3.0 | 4 | 6 | 50 |
| G9B82906 | R0.5 | 3.0 | 4 | 6 | 50 |
| G9B82907 | R1.0 | 3.0 | 4 | 6 | 50 |
| G9B82040 | R0.2 | 4.0 | 4 | 8 | 50 |
| G9B82908 | R0.3 | 4.0 | 4 | 8 | 50 |
| G9B82909 | R0.5 | 4.0 | 4 | 8 | 50 |
| G9B82910 | R1.0 | 4.0 | 4 | 8 | 50 |
| G9B82050 | R0.2 | 5.0 | 6 | 10 | 50 |
| G9B82911 | R0.3 | 5.0 | 6 | 10 | 50 |
| G9B82912 | R0.5 | 5.0 | 6 | 10 | 50 |
| G9B82913 | R1.0 | 5.0 | 6 | 10 | 50 |
| G9B82060 | R0.2 | 6.0 | 6 | 12 | 50 |
| G9B82914 | R0.3 | 6.0 | 6 | 12 | 50 |
| G9B82915 | R0.5 | 6.0 | 6 | 12 | 50 |
| G9B82916 | R1.0 | 6.0 | 6 | 12 | 50 |

▶ NEXT PAGE

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|-----|------------------------|----|-----------------------------|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | | Non Metallic Materials | | Heat Resistant Super Alloys | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 55 | | |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE SHORT LENGTH CORNER RADIUS

G9B82 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



Unit : mm

| EDP No. | Corner Radius | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|---------------|----------------|---------------|----------------|
| | R | | | | |
| G9B82080 | R0.5 | 8.0 | 8 | 16 | 60 |
| G9B82917 | R1.0 | 8.0 | 8 | 16 | 60 |
| G9B82918 | R1.5 | 8.0 | 8 | 16 | 60 |
| G9B82919 | R2.0 | 8.0 | 8 | 16 | 60 |
| G9B82920 | R2.5 | 8.0 | 8 | 16 | 60 |
| G9B82100 | R0.5 | 10.0 | 10 | 20 | 75 |
| G9B82921 | R1.0 | 10.0 | 10 | 20 | 75 |
| G9B82922 | R1.5 | 10.0 | 10 | 20 | 75 |
| G9B82923 | R2.0 | 10.0 | 10 | 20 | 75 |
| G9B82924 | R2.5 | 10.0 | 10 | 20 | 75 |
| G9B82120 | R0.5 | 12.0 | 12 | 24 | 75 |
| G9B82925 | R1.0 | 12.0 | 12 | 24 | 75 |
| G9B82926 | R1.5 | 12.0 | 12 | 24 | 75 |
| G9B82927 | R2.0 | 12.0 | 12 | 24 | 75 |
| G9B82928 | R2.5 | 12.0 | 12 | 24 | 75 |

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 400 Rm | 1050 Rm | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE LONG REACH CORNER RADIUS

G9B83 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

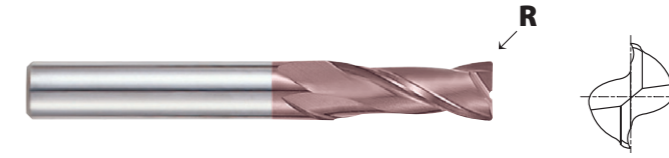

Unit : mm

| EDP No. | Corner Radius | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|---------------|----------------|---------------|----------------|
| | R | | | | |
| G9B83030 | R0.5 | 3.0 | 4 | 6 | 75 |
| G9B83901 | R1.0 | 3.0 | 4 | 6 | 75 |
| G9B83040 | R0.5 | 4.0 | 4 | 8 | 75 |
| G9B83902 | R1.0 | 4.0 | 4 | 8 | 75 |
| G9B83050 | R0.5 | 5.0 | 6 | 10 | 75 |
| G9B83903 | R1.0 | 5.0 | 6 | 10 | 75 |
| G9B83060 | R0.5 | 6.0 | 6 | 12 | 75 |
| G9B83904 | R1.0 | 6.0 | 6 | 12 | 75 |
| G9B83080 | R0.5 | 8.0 | 8 | 16 | 100 |
| G9B83905 | R1.0 | 8.0 | 8 | 16 | 100 |
| G9B83906 | R1.5 | 8.0 | 8 | 16 | 100 |
| G9B83907 | R2.0 | 8.0 | 8 | 16 | 100 |
| G9B83908 | R2.5 | 8.0 | 8 | 16 | 100 |
| G9B83100 | R0.5 | 10.0 | 10 | 20 | 100 |
| G9B83909 | R1.0 | 10.0 | 10 | 20 | 100 |
| G9B83910 | R1.5 | 10.0 | 10 | 20 | 100 |
| G9B83911 | R2.0 | 10.0 | 10 | 20 | 100 |
| G9B83912 | R2.5 | 10.0 | 10 | 20 | 100 |
| G9B83120 | R0.5 | 12.0 | 12 | 24 | 100 |
| G9B83913 | R1.0 | 12.0 | 12 | 24 | 100 |
| G9B83914 | R1.5 | 12.0 | 12 | 24 | 100 |
| G9B83915 | R2.0 | 12.0 | 12 | 24 | 100 |
| G9B83916 | R2.5 | 12.0 | 12 | 24 | 100 |

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 400 Rm | 1050 Rm | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH CORNER RADIUS

G9B84 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.



Unit : mm

| EDP No. | Corner Radius | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|---------------|----------------|---------------|----------------|
| | R | | | | |
| G9B84020 | R0.2 | 2.0 | 4 | 4 | 50 |
| G9B84901 | R0.3 | 2.0 | 4 | 4 | 50 |
| G9B84902 | R0.5 | 2.0 | 4 | 4 | 50 |
| G9B84025 | R0.2 | 2.5 | 4 | 5 | 50 |
| G9B84903 | R0.3 | 2.5 | 4 | 5 | 50 |
| G9B84904 | R0.5 | 2.5 | 4 | 5 | 50 |
| G9B84030 | R0.2 | 3.0 | 4 | 6 | 50 |
| G9B84905 | R0.3 | 3.0 | 4 | 6 | 50 |
| G9B84906 | R0.5 | 3.0 | 4 | 6 | 50 |
| G9B84907 | R1.0 | 3.0 | 4 | 6 | 50 |
| G9B84040 | R0.2 | 4.0 | 4 | 8 | 50 |
| G9B84908 | R0.3 | 4.0 | 4 | 8 | 50 |
| G9B84909 | R0.5 | 4.0 | 4 | 8 | 50 |
| G9B84910 | R1.0 | 4.0 | 4 | 8 | 50 |
| G9B84050 | R0.2 | 5.0 | 6 | 10 | 50 |
| G9B84911 | R0.3 | 5.0 | 6 | 10 | 50 |
| G9B84912 | R0.5 | 5.0 | 6 | 10 | 50 |
| G9B84913 | R1.0 | 5.0 | 6 | 10 | 50 |
| G9B84060 | R0.2 | 6.0 | 6 | 12 | 50 |
| G9B84914 | R0.3 | 6.0 | 6 | 12 | 50 |
| G9B84915 | R0.5 | 6.0 | 6 | 12 | 50 |

▶ NEXT PAGE

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | | H | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|------------------------|----|-----------------------------|-----|-----|-----|-----|-----------------|--------|----------------|-------------------|--------------------|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 400 Rm | 1050 Rm | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH CORNER RADIUS

G9B84 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

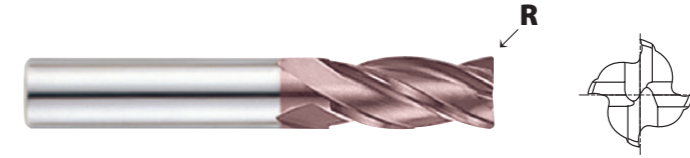

Unit : mm

| EDP No. | Corner Radius | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|---------------|----------------|---------------|----------------|
| | R | | | | |
| G9B84916 | R1.0 | 6.0 | 6 | 12 | 50 |
| G9B84080 | R0.5 | 8.0 | 8 | 16 | 60 |
| G9B84917 | R1.0 | 8.0 | 8 | 16 | 60 |
| G9B84918 | R1.5 | 8.0 | 8 | 16 | 60 |
| G9B84919 | R2.0 | 8.0 | 8 | 16 | 60 |
| G9B84920 | R2.5 | 8.0 | 8 | 16 | 60 |
| G9B84100 | R0.5 | 10.0 | 10 | 20 | 75 |
| G9B84921 | R1.0 | 10.0 | 10 | 20 | 75 |
| G9B84922 | R1.5 | 10.0 | 10 | 20 | 75 |
| G9B84923 | R2.0 | 10.0 | 10 | 20 | 75 |
| G9B84924 | R2.5 | 10.0 | 10 | 20 | 75 |
| G9B84120 | R0.5 | 12.0 | 12 | 24 | 75 |
| G9B84925 | R1.0 | 12.0 | 12 | 24 | 75 |
| G9B84926 | R1.5 | 12.0 | 12 | 24 | 75 |
| G9B84927 | R2.0 | 12.0 | 12 | 24 | 75 |
| G9B84928 | R2.5 | 12.0 | 12 | 24 | 75 |

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | | H | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|------------------------|----|-----------------------------|-----|-----|-----|-----|-----------------|--------|----------------|-------------------|--------------------|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 400 Rm | 1050 Rm | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE LONG REACH CORNER RADIUS

G9B85 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

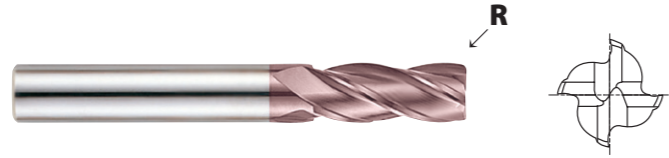

Unit : mm

| EDP No. | Corner Radius | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|---------------|----------------|---------------|----------------|
| | R | | | | |
| G9B85030 | R0.5 | 3.0 | 4 | 6 | 75 |
| G9B85901 | R1.0 | 3.0 | 4 | 6 | 75 |
| G9B85040 | R0.5 | 4.0 | 4 | 8 | 75 |
| G9B85902 | R1.0 | 4.0 | 4 | 8 | 75 |
| G9B85050 | R0.5 | 5.0 | 6 | 10 | 75 |
| G9B85903 | R1.0 | 5.0 | 6 | 10 | 75 |
| G9B85060 | R0.5 | 6.0 | 6 | 12 | 75 |
| G9B85904 | R1.0 | 6.0 | 6 | 12 | 75 |
| G9B85080 | R0.5 | 8.0 | 8 | 16 | 100 |
| G9B85905 | R1.0 | 8.0 | 8 | 16 | 100 |
| G9B85906 | R1.5 | 8.0 | 8 | 16 | 100 |
| G9B85907 | R2.0 | 8.0 | 8 | 16 | 100 |
| G9B85908 | R2.5 | 8.0 | 8 | 16 | 100 |
| G9B85100 | R0.5 | 10.0 | 10 | 20 | 100 |
| G9B85909 | R1.0 | 10.0 | 10 | 20 | 100 |
| G9B85910 | R1.5 | 10.0 | 10 | 20 | 100 |
| G9B85911 | R2.0 | 10.0 | 10 | 20 | 100 |
| G9B85912 | R2.5 | 10.0 | 10 | 20 | 100 |
| G9B85120 | R0.5 | 12.0 | 12 | 24 | 100 |
| G9B85913 | R1.0 | 12.0 | 12 | 24 | 100 |
| G9B85914 | R1.5 | 12.0 | 12 | 24 | 100 |
| G9B85915 | R2.0 | 12.0 | 12 | 24 | 100 |
| G9B85916 | R2.5 | 12.0 | 12 | 24 | 100 |

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 230 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|------------------------|----|----|-----------------------------|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | | Heat Resistant Super Alloys | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 400 Rm | 1050 Rm | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE SHORT LENGTH

G9424 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9424010 | 1.0 | 4 | 3 | 40 |
| G9424015 | 1.5 | 4 | 4.5 | 40 |
| G9424020 | 2.0 | 2 | 8 | 32 |
| G9424025 | 2.5 | 2.5 | 8 | 32 |
| G9424030 | 3.0 | 3 | 12 | 32 |
| G9424035 | 3.5 | 3.5 | 12 | 32 |
| G9424040 | 4.0 | 4 | 12 | 40 |
| G9424045 | 4.5 | 4.5 | 14 | 50 |
| G9424050 | 5.0 | 5 | 14 | 50 |
| G9424055 | 5.5 | 5.5 | 16 | 50 |
| G9424060 | 6.0 | 6 | 16 | 50 |
| G9424070 | 7.0 | 7 | 20 | 60 |
| G9424080 | 8.0 | 8 | 20 | 60 |
| G9424090 | 9.0 | 9 | 20 | 60 |
| G9424100 | 10.0 | 10 | 22 | 70 |
| G9424120 | 12.0 | 12 | 22 | 70 |
| G9424140 | 14.0 | 14 | 25 | 75 |
| G9424160 | 16.0 | 16 | 25 | 75 |
| G9424200 | 20.0 | 20 | 32 | 100 |

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 230 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|------------------------|----|----|-----------------------------|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | | Heat Resistant Super Alloys | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 400 Rm | 1050 Rm | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE SHORT LENGTH WITH CHAMFER

G9G44 PLAIN SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

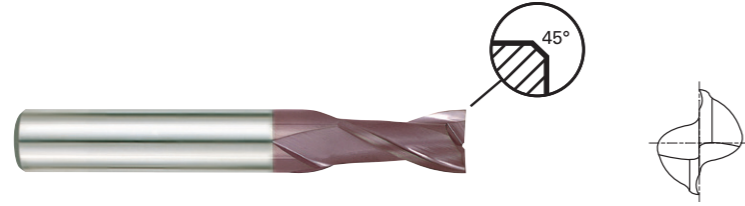

Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length | Chamfer |
|----------|---------------|----------------|---------------|----------------|---------|
| G9G44030 | 3.0 | 3 | 12 | 32 | 0.10 |
| G9G44040 | 4.0 | 4 | 12 | 40 | 0.10 |
| G9G44050 | 5.0 | 5 | 14 | 50 | 0.10 |
| G9G44060 | 6.0 | 6 | 16 | 50 | 0.10 |
| G9G44080 | 8.0 | 8 | 20 | 60 | 0.13 |
| G9G44100 | 10.0 | 10 | 22 | 70 | 0.13 |
| G9G44120 | 12.0 | 12 | 22 | 70 | 0.18 |
| G9G44140 | 14.0 | 14 | 25 | 75 | 0.18 |
| G9G44160 | 16.0 | 16 | 25 | 75 | 0.18 |
| G9G44200 | 20.0 | 20 | 32 | 100 | 0.23 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |



◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 35 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 55 | | |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE SHORT LENGTH

G9A68 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9A68010 | 1.0 | 3 | 3 | 39 |
| G9A68015 | 1.5 | 3 | 5 | 39 |
| G9A68020 | 2.0 | 3 | 7 | 39 |
| G9A68025 | 2.5 | 3 | 7 | 39 |
| G9A68030 | 3.0 | 3 | 9 | 39 |
| G9A68040 | 4.0 | 4 | 14 | 51 |
| G9A68050 | 5.0 | 5 | 16 | 51 |
| G9A68060 | 6.0 | 6 | 19 | 64 |
| G9A68080 | 8.0 | 8 | 21 | 64 |
| G9A68100 | 10.0 | 10 | 22 | 70 |
| G9A68120 | 12.0 | 12 | 25 | 76 |
| G9A68160 | 16.0 | 16 | 32 | 89 |
| G9A68200 | 20.0 | 20 | 38 | 102 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 35 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 55 | | |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE SHORT LENGTH

G9444 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9444020 | 2.0 | 6 | 3 | 50 |
| G9444030 | 3.0 | 6 | 4 | 50 |
| G9444035 | 3.5 | 6 | 4 | 50 |
| G9444040 | 4.0 | 6 | 5 | 54 |
| G9444045 | 4.5 | 6 | 5 | 54 |
| G9444050 | 5.0 | 6 | 6 | 54 |
| G9444060 | 6.0 | 6 | 7 | 54 |
| G9444070 | 7.0 | 8 | 8 | 58 |
| G9444080 | 8.0 | 8 | 9 | 58 |
| G9444090 | 9.0 | 10 | 10 | 66 |
| G9444100 | 10.0 | 10 | 11 | 66 |
| G9444120 | 12.0 | 12 | 12 | 73 |
| G9444140 | 14.0 | 14 | 14 | 75 |
| G9444160 | 16.0 | 16 | 16 | 82 |
| G9444180 | 18.0 | 18 | 18 | 84 |
| G9444200 | 20.0 | 20 | 20 | 92 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 42 | 55 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE LONG LENGTH

G9527 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9527035 | 3.5 | 3.5 | 7 | 50 |
| G9527040 | 4.0 | 4 | 8 | 50 |
| G9527045 | 4.5 | 4.5 | 8 | 50 |
| G9527050 | 5.0 | 5 | 10 | 50 |
| G9527055 | 5.5 | 5.5 | 10 | 57 |
| G9527060 | 6.0 | 6 | 10 | 57 |
| G9527065 | 6.5 | 6.5 | 13 | 60 |
| G9527070 | 7.0 | 7 | 13 | 60 |
| G9527075 | 7.5 | 7.5 | 16 | 63 |
| G9527080 | 8.0 | 8 | 16 | 63 |
| G9527085 | 8.5 | 8.5 | 16 | 67 |
| G9527090 | 9.0 | 9 | 16 | 67 |
| G9527095 | 9.5 | 9.5 | 19 | 72 |
| G9527100 | 10.0 | 10 | 19 | 72 |
| G9527110 | 11.0 | 11 | 22 | 83 |
| G9527120 | 12.0 | 12 | 22 | 83 |
| G9527130 | 13.0 | 13 | 22 | 83 |
| G9527140 | 14.0 | 14 | 22 | 83 |
| G9527150 | 15.0 | 15 | 26 | 92 |
| G9527160 | 16.0 | 16 | 26 | 92 |
| G9527180 | 18.0 | 18 | 26 | 92 |
| G9527200 | 20.0 | 20 | 32 | 104 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 42 | 55 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE LONG LENGTH

G9445 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



under Ø2mm from Ø2mm



| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9445901 | 2.0 | 3 | 6 | 38 |
| G9445028 | 2.8 | 6 | 7 | 57 |
| G9445030 | 3.0 | 6 | 7 | 57 |
| G9445035 | 3.5 | 6 | 7 | 57 |
| G9445038 | 3.8 | 6 | 8 | 57 |
| G9445040 | 4.0 | 6 | 8 | 57 |
| G9445045 | 4.5 | 6 | 8 | 57 |
| G9445048 | 4.8 | 6 | 10 | 57 |
| G9445050 | 5.0 | 6 | 10 | 57 |
| G9445957 | 5.8 | 6 | 10 | 57 |
| G9445060 | 6.0 | 6 | 10 | 57 |
| G9445967 | 6.8 | 8 | 13 | 63 |
| G9445070 | 7.0 | 8 | 13 | 63 |
| G9445977 | 7.8 | 8 | 16 | 63 |
| G9445080 | 8.0 | 8 | 16 | 63 |
| G9445087 | 8.7 | 10 | 16 | 72 |
| G9445090 | 9.0 | 10 | 16 | 72 |
| G9445097 | 9.7 | 10 | 19 | 72 |
| G9445100 | 10.0 | 10 | 19 | 72 |
| G9445117 | 11.7 | 12 | 22 | 83 |
| G9445120 | 12.0 | 12 | 22 | 83 |

Unit : mm

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

● with plain shank
▶ NEXT PAGE

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 230 | | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | | | | | H | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|-----|------------------------|----|-----------------------------|-----|-----|-----|-----|-----------------|---------|----------------|-------------------|--------------------|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE LONG LENGTH

G9445 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



under Ø2mm from Ø2mm



| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9445137 | 13.7 | 14 | 22 | 83 |
| G9445140 | 14.0 | 14 | 22 | 83 |
| G9445157 | 15.7 | 16 | 26 | 92 |
| G9445160 | 16.0 | 16 | 26 | 92 |
| G9445177 | 17.7 | 18 | 26 | 92 |
| G9445180 | 18.0 | 18 | 26 | 92 |
| G9445197 | 19.7 | 20 | 32 | 104 |
| G9445200 | 20.0 | 20 | 32 | 104 |

Unit : mm

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 230 | | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | | | | | H | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|-----|------------------------|----|-----------------------------|-----|-----|-----|-----|-----------------|---------|----------------|-------------------|--------------------|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE LONG LENGTH WITH CHAMFER

G9G45 FLAT SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length | Chamfer |
|----------|---------------|----------------|---------------|----------------|---------|
| G9G45030 | 3.0 | 6 | 7 | 57 | 0.10 |
| G9G45040 | 4.0 | 6 | 8 | 57 | 0.10 |
| G9G45050 | 5.0 | 6 | 10 | 57 | 0.10 |
| G9G45060 | 6.0 | 6 | 10 | 57 | 0.10 |
| G9G45080 | 8.0 | 8 | 16 | 63 | 0.13 |
| G9G45100 | 10.0 | 10 | 19 | 72 | 0.13 |
| G9G45120 | 12.0 | 12 | 22 | 83 | 0.18 |
| G9G45140 | 14.0 | 14 | 22 | 83 | 0.18 |
| G9G45160 | 16.0 | 16 | 26 | 92 | 0.18 |
| G9G45200 | 20.0 | 20 | 32 | 104 | 0.23 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |



Enforced Cutting Edge

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | | 13 | 25 | 28 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|------------------------|----|----|-----------------------------|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | | Heat Resistant Super Alloys | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE EXTRA LONG LENGTH

G9452 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9452903 | 3.0 | 3 | 20 | 60 |
| G9452030 | 3.0 | 3 | 30 | 75 |
| G9452904 | 4.0 | 4 | 20 | 60 |
| G9452040 | 4.0 | 4 | 30 | 75 |
| G9452905 | 5.0 | 5 | 25 | 75 |
| G9452050 | 5.0 | 5 | 40 | 100 |
| G9452906 | 6.0 | 6 | 30 | 75 |
| G9452060 | 6.0 | 6 | 50 | 150 |
| G9452908 | 8.0 | 8 | 30 | 75 |
| G9452080 | 8.0 | 8 | 50 | 150 |
| G9452910 | 10.0 | 10 | 40 | 100 |
| G9452100 | 10.0 | 10 | 60 | 150 |
| G9452912 | 12.0 | 12 | 45 | 100 |
| G9452120 | 12.0 | 12 | 75 | 150 |
| G9452914 | 14.0 | 14 | 45 | 100 |
| G9452140 | 14.0 | 14 | 65 | 150 |
| G9452916 | 16.0 | 16 | 45 | 100 |
| G9452160 | 16.0 | 16 | 65 | 150 |
| G9452918 | 18.0 | 18 | 45 | 100 |
| G9452180 | 18.0 | 18 | 65 | 150 |
| G9452920 | 20.0 | 20 | 45 | 100 |
| G9452200 | 20.0 | 20 | 65 | 150 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | | 13 | 25 | 28 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|------------------------|----|----|-----------------------------|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | | Heat Resistant Super Alloys | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE RIB PROCESSING

G9B80 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

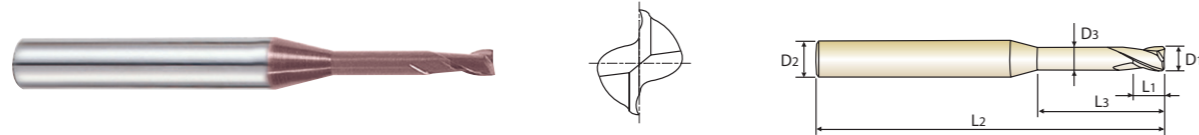

Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Length Below Shank | Overall Length | Neck Diameter |
|----------|---------------|----------------|---------------|--------------------|----------------|---------------|
| | D1 | D2 | L1 | L3 | L2 | D3 |
| G9B80004 | 0.4 | 4 | 0.7 | 2 | 50 | 0.37 |
| G9B80901 | 0.4 | 4 | 0.7 | 4 | 50 | 0.37 |
| G9B80005 | 0.5 | 4 | 0.75 | 2 | 50 | 0.45 |
| G9B80902 | 0.5 | 4 | 0.75 | 4 | 50 | 0.45 |
| G9B80903 | 0.5 | 4 | 0.75 | 6 | 50 | 0.45 |
| G9B80006 | 0.6 | 4 | 0.9 | 2 | 50 | 0.55 |
| G9B80904 | 0.6 | 4 | 0.9 | 4 | 50 | 0.55 |
| G9B80905 | 0.6 | 4 | 0.9 | 6 | 50 | 0.55 |
| G9B80007 | 0.7 | 4 | 1.1 | 4 | 50 | 0.65 |
| G9B80906 | 0.7 | 4 | 1.1 | 6 | 50 | 0.65 |
| G9B80008 | 0.8 | 4 | 1.2 | 4 | 50 | 0.75 |
| G9B80907 | 0.8 | 4 | 1.2 | 6 | 50 | 0.75 |
| G9B80908 | 0.8 | 4 | 1.2 | 8 | 50 | 0.75 |
| G9B80009 | 0.9 | 4 | 1.4 | 6 | 50 | 0.85 |
| G9B80909 | 0.9 | 4 | 1.4 | 8 | 50 | 0.85 |
| G9B80910 | 0.9 | 4 | 1.4 | 10 | 50 | 0.85 |
| G9B80010 | 1.0 | 4 | 1.5 | 6 | 50 | 0.95 |
| G9B80911 | 1.0 | 4 | 1.5 | 8 | 50 | 0.95 |
| G9B80912 | 1.0 | 4 | 1.5 | 10 | 50 | 0.95 |
| G9B80913 | 1.0 | 4 | 1.5 | 12 | 50 | 0.95 |
| G9B80012 | 1.2 | 4 | 1.8 | 6 | 50 | 1.15 |
| G9B80914 | 1.2 | 4 | 1.8 | 8 | 50 | 1.15 |
| G9B80915 | 1.2 | 4 | 1.8 | 10 | 50 | 1.15 |
| G9B80916 | 1.2 | 4 | 1.8 | 12 | 50 | 1.15 |

▶ NEXT PAGE

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 21 | | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |

| ISO Material Description | N | | | | S | | | | | | | H | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|------------------------|----|-----------------------------|-----|-----|-----|-----|-----------------|--------|----------------|-------------------|--------------------|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE RIB PROCESSING

G9B80 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

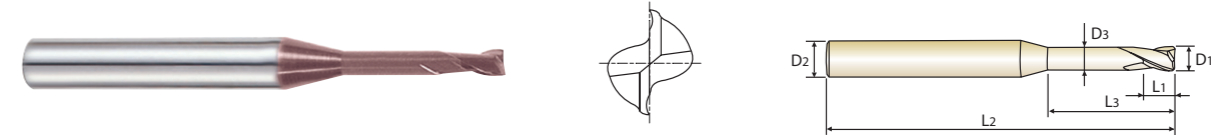

Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Length Below Shank | Overall Length | Neck Diameter |
|----------|---------------|----------------|---------------|--------------------|----------------|---------------|
| | D1 | D2 | L1 | L3 | L2 | D3 |
| G9B80015 | 1.5 | 4 | 2.3 | 6 | 50 | 1.45 |
| G9B80917 | 1.5 | 4 | 2.3 | 8 | 50 | 1.45 |
| G9B80918 | 1.5 | 4 | 2.3 | 10 | 50 | 1.45 |
| G9B80919 | 1.5 | 4 | 2.3 | 12 | 50 | 1.45 |
| G9B80920 | 1.5 | 4 | 2.3 | 14 | 50 | 1.45 |
| G9B80921 | 1.5 | 4 | 2.3 | 16 | 50 | 1.45 |
| G9B80922 | 1.5 | 4 | 2.3 | 18 | 50 | 1.45 |
| G9B80923 | 1.5 | 4 | 2.3 | 20 | 50 | 1.45 |
| G9B80020 | 2.0 | 4 | 3 | 6 | 50 | 1.95 |
| G9B80924 | 2.0 | 4 | 3 | 8 | 50 | 1.95 |
| G9B80925 | 2.0 | 4 | 3 | 10 | 50 | 1.95 |
| G9B80926 | 2.0 | 4 | 3 | 12 | 50 | 1.95 |
| G9B80927 | 2.0 | 4 | 3 | 14 | 50 | 1.95 |
| G9B80928 | 2.0 | 4 | 3 | 16 | 50 | 1.95 |
| G9B80929 | 2.0 | 4 | 3 | 18 | 50 | 1.95 |
| G9B80930 | 2.0 | 4 | 3 | 20 | 50 | 1.95 |
| G9B80025 | 2.5 | 4 | 3.7 | 8 | 50 | 2.40 |
| G9B80931 | 2.5 | 4 | 3.7 | 12 | 50 | 2.40 |
| G9B80932 | 2.5 | 4 | 3.7 | 16 | 50 | 2.40 |
| G9B80933 | 2.5 | 4 | 3.7 | 20 | 50 | 2.40 |
| G9B80030 | 3.0 | 6 | 4.5 | 8 | 50 | 2.85 |
| G9B80934 | 3.0 | 6 | 4.5 | 12 | 50 | 2.85 |
| G9B80935 | 3.0 | 6 | 4.5 | 16 | 60 | 2.85 |
| G9B80936 | 3.0 | 6 | 4.5 | 20 | 60 | 2.85 |

▶ NEXT PAGE

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 21 | | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |

| ISO Material Description | N | | | | S | | | | | | | H | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|------------------------|----|-----------------------------|-----|-----|-----|-----|-----------------|--------|----------------|-------------------|--------------------|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE RIB PROCESSING

G9B80 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

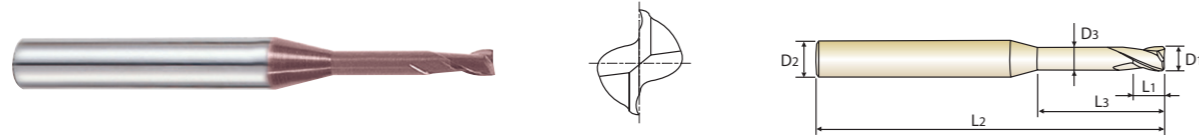

Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Length Below Shank | Overall Length | Neck Diameter |
|----------|---------------|----------------|---------------|--------------------|----------------|---------------|
| | D1 | D2 | L1 | L3 | L2 | D3 |
| G9B80937 | 3.0 | 6 | 4.5 | 25 | 75 | 2.85 |
| G9B80040 | 4.0 | 6 | 6 | 12 | 50 | 3.85 |
| G9B80938 | 4.0 | 6 | 6 | 16 | 60 | 3.85 |
| G9B80939 | 4.0 | 6 | 6 | 20 | 75 | 3.85 |
| G9B80940 | 4.0 | 6 | 6 | 25 | 75 | 3.85 |
| G9B80941 | 4.0 | 6 | 6 | 30 | 75 | 3.85 |
| G9B80942 | 4.0 | 6 | 6 | 35 | 75 | 3.85 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 35 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|-----|------------------------|----|-----------------------------|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | | Non Metallic Materials | | Heat Resistant Super Alloys | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | | | | | | | | | |

TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE SHORT LENGTH THROW AWAY

G9553 PLAIN SHANK G9410 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length | |
|----------|---------------|----------------|---------------|----------------|----|
| | PLAIN | FLAT | | | |
| G9553005 | - | 0.5 | 3 | 1.5 | 38 |
| G9553006 | - | 0.6 | 3 | 1.5 | 38 |
| G9553008 | - | 0.8 | 3 | 2 | 38 |
| G9553010 | - | 1.0 | 3 | 2 | 38 |
| G9553012 | - | 1.2 | 3 | 2 | 38 |
| G9553015 | - | 1.5 | 3 | 2 | 38 |
| G9553018 | - | 1.8 | 3 | 2 | 38 |
| - | G9410020 | 2.0 | 6 | 4 | 35 |
| - | G9410025 | 2.5 | 6 | 5 | 36 |
| - | G9410030 | 3.0 | 6 | 5 | 36 |
| - | G9410035 | 3.5 | 6 | 6 | 37 |
| - | G9410040 | 4.0 | 6 | 7 | 38 |
| - | G9410045 | 4.5 | 6 | 8 | 38 |
| - | G9410050 | 5.0 | 6 | 8 | 39 |
| - | G9410055 | 5.5 | 6 | 8 | 39 |
| - | G9410957 | 5.8 | 6 | 8 | 39 |
| - | G9410060 | 6.0 | 6 | 8 | 39 |
| - | G9410967 | 6.8 | 8 | 10 | 42 |
| - | G9410070 | 7.0 | 8 | 10 | 42 |
| - | G9410977 | 7.8 | 8 | 10 | 42 |
| - | G9410080 | 8.0 | 8 | 11 | 43 |
| - | G9410087 | 8.7 | 10 | 11 | 48 |
| - | G9410090 | 9.0 | 10 | 11 | 48 |
| - | G9410097 | 9.7 | 10 | 11 | 48 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 35 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|-----|------------------------|----|-----------------------------|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | | Non Metallic Materials | | Heat Resistant Super Alloys | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | | | | | | | | | |

TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE SHORT LENGTH THROW AWAY

G9553 PLAIN SHANK
G9410 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

| EDP No. | | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|---------|-----------------|---------------|----------------|---------------|----------------|
| PLAIN | FLAT | | | | |
| - | G9410100 | 10.0 | 10 | 13 | 50 |
| - | G9410120 | 12.0 | 12 | 15 | 55 |
| - | G9410140 | 14.0 | 14 | 15 | 58 |
| - | G9410160 | 16.0 | 16 | 18 | 62 |
| - | G9410180 | 18.0 | 18 | 20 | 70 |
| - | G9410200 | 20.0 | 20 | 22 | 75 |

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | | 13 | 25 | 28 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE SHORT LENGTH THROW AWAY WITH CHAMFER

G9G46 FLAT SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.

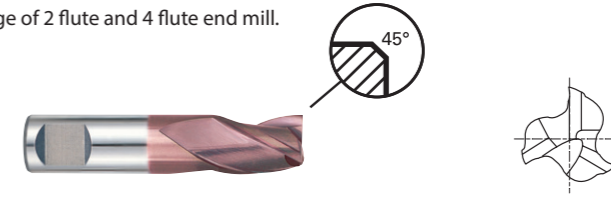

Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length | Chamfer |
|-----------------|---------------|----------------|---------------|----------------|---------|
| G9G46030 | 3.0 | 6 | 5 | 36 | 0.10 |
| G9G46040 | 4.0 | 6 | 7 | 38 | 0.10 |
| G9G46050 | 5.0 | 6 | 8 | 39 | 0.10 |
| G9G46060 | 6.0 | 6 | 8 | 39 | 0.10 |
| G9G46080 | 8.0 | 8 | 11 | 43 | 0.13 |
| G9G46100 | 10.0 | 10 | 13 | 50 | 0.13 |
| G9G46120 | 12.0 | 12 | 15 | 55 | 0.18 |
| G9G46140 | 14.0 | 14 | 15 | 58 | 0.18 |
| G9G46160 | 16.0 | 16 | 18 | 62 | 0.18 |
| G9G46200 | 20.0 | 20 | 22 | 75 | 0.23 |

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

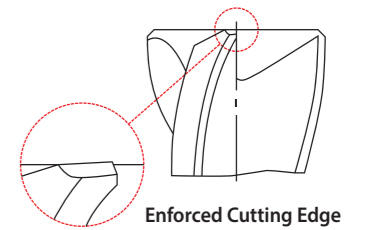

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | | 13 | 25 | 28 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE SHORT LENGTH

G9425 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9425010 | 1.0 | 4 | 3 | 40 |
| G9425015 | 1.5 | 4 | 4.5 | 40 |
| G9425020 | 2.0 | 2 | 8 | 32 |
| G9425025 | 2.5 | 2.5 | 8 | 32 |
| G9425030 | 3.0 | 3 | 12 | 32 |
| G9425035 | 3.5 | 3.5 | 12 | 32 |
| G9425040 | 4.0 | 4 | 12 | 40 |
| G9425045 | 4.5 | 4.5 | 14 | 50 |
| G9425050 | 5.0 | 5 | 14 | 50 |
| G9425055 | 5.5 | 5.5 | 16 | 50 |
| G9425060 | 6.0 | 6 | 16 | 50 |
| G9425070 | 7.0 | 7 | 20 | 60 |
| G9425080 | 8.0 | 8 | 20 | 60 |
| G9425090 | 9.0 | 9 | 20 | 60 |
| G9425100 | 10.0 | 10 | 22 | 70 |
| G9425120 | 12.0 | 12 | 22 | 70 |
| G9425140 | 14.0 | 14 | 25 | 75 |
| G9425160 | 16.0 | 16 | 25 | 75 |
| G9425200 | 20.0 | 20 | 32 | 100 |

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 21 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 42 | 55 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE SHORT LENGTH WITH CHAMFER

G9G47 PLAIN SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length | Chamfer |
|----------|---------------|----------------|---------------|----------------|---------|
| G9G47030 | 3.0 | 3 | 12 | 32 | 0.10 |
| G9G47040 | 4.0 | 4 | 12 | 40 | 0.10 |
| G9G47050 | 5.0 | 5 | 14 | 50 | 0.10 |
| G9G47060 | 6.0 | 6 | 16 | 50 | 0.10 |
| G9G47080 | 8.0 | 8 | 20 | 60 | 0.13 |
| G9G47100 | 10.0 | 10 | 22 | 70 | 0.13 |
| G9G47120 | 12.0 | 12 | 22 | 70 | 0.18 |
| G9G47140 | 14.0 | 14 | 25 | 75 | 0.18 |
| G9G47160 | 16.0 | 16 | 25 | 75 | 0.18 |
| G9G47200 | 20.0 | 20 | 32 | 100 | 0.23 |

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |

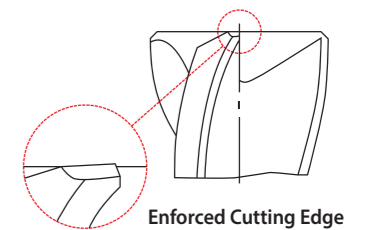

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 21 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 42 | 55 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE SHORT LENGTH

G9439 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9439020 | 2.0 | 6 | 3 | 50 |
| G9439030 | 3.0 | 6 | 4 | 50 |
| G9439035 | 3.5 | 6 | 4 | 50 |
| G9439040 | 4.0 | 6 | 5 | 54 |
| G9439045 | 4.5 | 6 | 5 | 54 |
| G9439050 | 5.0 | 6 | 6 | 54 |
| G9439060 | 6.0 | 6 | 7 | 54 |
| G9439070 | 7.0 | 8 | 8 | 58 |
| G9439080 | 8.0 | 8 | 9 | 58 |
| G9439090 | 9.0 | 10 | 10 | 66 |
| G9439100 | 10.0 | 10 | 11 | 66 |
| G9439120 | 12.0 | 12 | 12 | 73 |
| G9439140 | 14.0 | 14 | 14 | 75 |
| G9439160 | 16.0 | 16 | 16 | 82 |
| G9439180 | 18.0 | 18 | 18 | 84 |
| G9439200 | 20.0 | 20 | 20 | 92 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good



| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 42 | 55 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE LONG LENGTH

G9528 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9528035 | 3.5 | 3.5 | 7 | 50 |
| G9528040 | 4.0 | 4 | 8 | 50 |
| G9528045 | 4.5 | 4.5 | 8 | 50 |
| G9528050 | 5.0 | 5 | 10 | 50 |
| G9528055 | 5.5 | 5.5 | 10 | 57 |
| G9528060 | 6.0 | 6 | 10 | 57 |
| G9528065 | 6.5 | 6.5 | 13 | 60 |
| G9528070 | 7.0 | 7 | 13 | 60 |
| G9528075 | 7.5 | 7.5 | 16 | 63 |
| G9528080 | 8.0 | 8 | 16 | 63 |
| G9528085 | 8.5 | 8.5 | 16 | 67 |
| G9528090 | 9.0 | 9 | 16 | 67 |
| G9528095 | 9.5 | 9.5 | 19 | 72 |
| G9528100 | 10.0 | 10 | 19 | 72 |
| G9528110 | 11.0 | 11 | 22 | 83 |
| G9528120 | 12.0 | 12 | 22 | 83 |
| G9528130 | 13.0 | 13 | 22 | 83 |
| G9528140 | 14.0 | 14 | 22 | 83 |
| G9528150 | 15.0 | 15 | 26 | 92 |
| G9528160 | 16.0 | 16 | 26 | 92 |
| G9528180 | 18.0 | 18 | 26 | 92 |
| G9528200 | 20.0 | 20 | 32 | 104 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 42 | 55 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE LONG LENGTH

G9433 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm


| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9433030 | 3.0 | 6 | 7 | 57 |
| G9433040 | 4.0 | 6 | 8 | 57 |
| G9433050 | 5.0 | 6 | 10 | 57 |
| G9433060 | 6.0 | 6 | 10 | 57 |
| G9433080 | 8.0 | 8 | 16 | 63 |
| G9433090 | 9.0 | 10 | 16 | 72 |
| G9433100 | 10.0 | 10 | 19 | 72 |
| G9433120 | 12.0 | 12 | 22 | 83 |
| G9433140 | 14.0 | 14 | 22 | 83 |
| G9433160 | 16.0 | 16 | 26 | 92 |
| G9433180 | 18.0 | 18 | 26 | 92 |
| G9433200 | 20.0 | 20 | 32 | 104 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE LONG LENGTH WITH CHAMFER

G9G48 FLAT SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length | Chamfer |
|----------|---------------|----------------|---------------|----------------|---------|
| G9G48030 | 3.0 | 6 | 7 | 57 | 0.10 |
| G9G48040 | 4.0 | 6 | 8 | 57 | 0.10 |
| G9G48050 | 5.0 | 6 | 10 | 57 | 0.10 |
| G9G48060 | 6.0 | 6 | 10 | 57 | 0.10 |
| G9G48080 | 8.0 | 8 | 16 | 63 | 0.13 |
| G9G48100 | 10.0 | 10 | 19 | 72 | 0.13 |
| G9G48120 | 12.0 | 12 | 22 | 83 | 0.18 |
| G9G48140 | 14.0 | 14 | 22 | 83 | 0.18 |
| G9G48160 | 16.0 | 16 | 26 | 92 | 0.18 |
| G9G48200 | 20.0 | 20 | 32 | 104 | 0.23 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

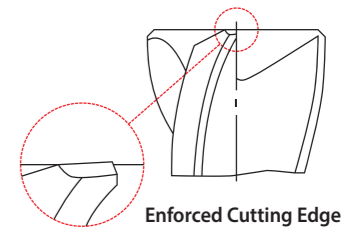

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 35 | 10 | 29 | 32 | 38 | 42 | 15 | 23 | 28 | 34 | 10 | 26 | 3 | 25 | 10 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 400 | 200 | 325 | 200 | 240 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 15 | 30 | 25 | 38 | 34 | 15 | 30 | 25 | 38 | 34 | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 42 | 55 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 35 | 10 | 29 | 32 | 38 | 42 | 15 | 23 | 28 | 34 | 10 | 26 | 3 | 25 | 10 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 400 | 200 | 325 | 200 | 240 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 15 | 30 | 25 | 38 | 34 | 15 | 30 | 25 | 38 | 34 | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 42 | 55 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE 45° HELIX LONG LENGTH

G9447 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.



Unit : mm


| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9447030 | 3.0 | 6 | 7 | 57 |
| G9447035 | 3.5 | 6 | 7 | 57 |
| G9447040 | 4.0 | 6 | 8 | 57 |
| G9447045 | 4.5 | 6 | 8 | 57 |
| G9447050 | 5.0 | 6 | 10 | 57 |
| G9447060 | 6.0 | 6 | 10 | 57 |
| G9447070 | 7.0 | 8 | 13 | 63 |
| G9447080 | 8.0 | 8 | 16 | 63 |
| G9447090 | 9.0 | 10 | 16 | 72 |
| G9447100 | 10.0 | 10 | 19 | 72 |
| G9447120 | 12.0 | 12 | 22 | 83 |
| G9447140 | 14.0 | 14 | 22 | 83 |
| G9447160 | 16.0 | 16 | 26 | 92 |
| G9447180 | 18.0 | 18 | 26 | 92 |
| G9447200 | 20.0 | 20 | 32 | 104 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE 45° HELIX LONG LENGTH WITH CHAMFER

G9G49 FLAT SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.

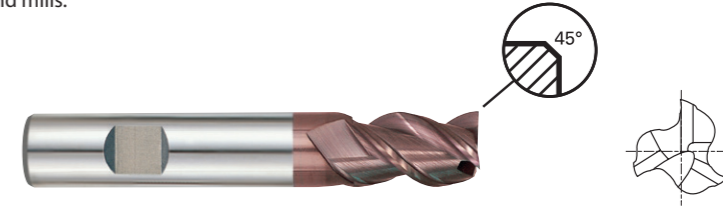

Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length | Chamfer |
|----------|---------------|----------------|---------------|----------------|---------|
| G9G49030 | 3.0 | 6 | 7 | 57 | 0.10 |
| G9G49040 | 4.0 | 6 | 8 | 57 | 0.10 |
| G9G49050 | 5.0 | 6 | 10 | 57 | 0.10 |
| G9G49060 | 6.0 | 6 | 10 | 57 | 0.10 |
| G9G49080 | 8.0 | 8 | 16 | 63 | 0.13 |
| G9G49100 | 10.0 | 10 | 19 | 72 | 0.13 |
| G9G49120 | 12.0 | 12 | 22 | 83 | 0.18 |
| G9G49140 | 14.0 | 14 | 22 | 83 | 0.18 |
| G9G49160 | 16.0 | 16 | 26 | 92 | 0.18 |
| G9G49200 | 20.0 | 20 | 32 | 104 | 0.23 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

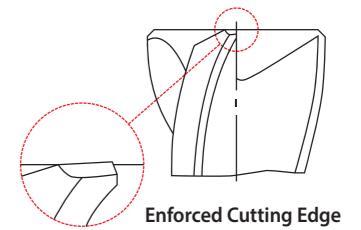

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 35 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 21 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 15 | 30 | 25 | 38 | 34 | 15 | 30 | 25 | 38 | 34 | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 35 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 21 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 15 | 30 | 25 | 38 | 34 | 15 | 30 | 25 | 38 | 34 | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH

G9432 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9432010 | 1.0 | 4 | 3 | 40 |
| G9432015 | 1.5 | 4 | 4.5 | 40 |
| G9432020 | 2.0 | 2 | 8 | 32 |
| G9432025 | 2.5 | 2.5 | 8 | 32 |
| G9432030 | 3.0 | 3 | 12 | 32 |
| G9432035 | 3.5 | 3.5 | 12 | 32 |
| G9432040 | 4.0 | 4 | 12 | 40 |
| G9432045 | 4.5 | 4.5 | 14 | 50 |
| G9432050 | 5.0 | 5 | 14 | 50 |
| G9432055 | 5.5 | 5.5 | 16 | 50 |
| G9432060 | 6.0 | 6 | 16 | 50 |
| G9432070 | 7.0 | 7 | 20 | 60 |
| G9432080 | 8.0 | 8 | 20 | 60 |
| G9432090 | 9.0 | 9 | 20 | 60 |
| G9432100 | 10.0 | 10 | 22 | 70 |
| G9432120 | 12.0 | 12 | 22 | 70 |
| G9432140 | 14.0 | 14 | 25 | 75 |
| G9432160 | 16.0 | 16 | 25 | 75 |
| G9432200 | 20.0 | 20 | 32 | 100 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ -0.03 | h5 |

◎ : Excellent ○ : Good



| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|------------------------|----|----|-----------------------------|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | | Heat Resistant Super Alloys | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH WITH CHAMFER

G9G50 PLAIN SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length | Chamfer |
|----------|---------------|----------------|---------------|----------------|---------|
| G9G50030 | 3.0 | 3 | 12 | 32 | 0.10 |
| G9G50040 | 4.0 | 4 | 12 | 40 | 0.10 |
| G9G50050 | 5.0 | 5 | 14 | 50 | 0.10 |
| G9G50060 | 6.0 | 6 | 16 | 50 | 0.10 |
| G9G50080 | 8.0 | 8 | 20 | 60 | 0.13 |
| G9G50100 | 10.0 | 10 | 22 | 70 | 0.13 |
| G9G50120 | 12.0 | 12 | 22 | 70 | 0.18 |
| G9G50140 | 14.0 | 14 | 25 | 75 | 0.18 |
| G9G50160 | 16.0 | 16 | 25 | 75 | 0.18 |
| G9G50200 | 20.0 | 20 | 32 | 100 | 0.23 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ -0.03 | h5 |

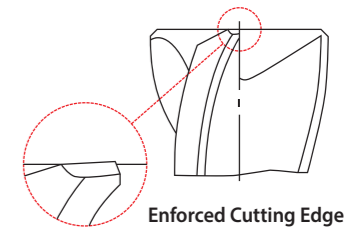

Enforced Cutting Edge

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|------------------------|----|----|-----------------------------|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | | Heat Resistant Super Alloys | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH

G9A69 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9A69010 | 1.0 | 3 | 3 | 39 |
| G9A69015 | 1.5 | 3 | 5 | 39 |
| G9A69020 | 2.0 | 3 | 7 | 39 |
| G9A69025 | 2.5 | 3 | 7 | 39 |
| G9A69030 | 3.0 | 3 | 10 | 39 |
| G9A69040 | 4.0 | 4 | 14 | 51 |
| G9A69050 | 5.0 | 5 | 16 | 51 |
| G9A69060 | 6.0 | 6 | 19 | 64 |
| G9A69080 | 8.0 | 8 | 21 | 64 |
| G9A69100 | 10.0 | 10 | 22 | 70 |
| G9A69120 | 12.0 | 12 | 25 | 76 |
| G9A69160 | 16.0 | 16 | 32 | 89 |
| G9A69200 | 20.0 | 20 | 38 | 102 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH

G9448 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9448020 | 2.0 | 6 | 4 | 50 |
| G9448025 | 2.5 | 6 | 4 | 50 |
| G9448030 | 3.0 | 6 | 5 | 50 |
| G9448035 | 3.5 | 6 | 6 | 50 |
| G9448040 | 4.0 | 6 | 8 | 54 |
| G9448045 | 4.5 | 6 | 8 | 54 |
| G9448050 | 5.0 | 6 | 9 | 54 |
| G9448060 | 6.0 | 6 | 10 | 54 |
| G9448070 | 7.0 | 8 | 11 | 58 |
| G9448080 | 8.0 | 8 | 12 | 58 |
| G9448090 | 9.0 | 10 | 13 | 66 |
| G9448100 | 10.0 | 10 | 14 | 66 |
| G9448120 | 12.0 | 12 | 16 | 73 |
| G9448140 | 14.0 | 14 | 18 | 75 |
| G9448160 | 16.0 | 16 | 22 | 82 |
| G9448180 | 18.0 | 18 | 24 | 84 |
| G9448200 | 20.0 | 20 | 26 | 92 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 38 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 3 | 25 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 38 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 3 | 25 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE LONG LENGTH

G9540 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9540035 | 3.5 | 3.5 | 10 | 50 |
| G9540040 | 4.0 | 4 | 11 | 50 |
| G9540045 | 4.5 | 4.5 | 11 | 50 |
| G9540050 | 5.0 | 5 | 13 | 50 |
| G9540055 | 5.5 | 5.5 | 13 | 57 |
| G9540060 | 6.0 | 6 | 13 | 57 |
| G9540065 | 6.5 | 6.5 | 16 | 60 |
| G9540070 | 7.0 | 7 | 16 | 60 |
| G9540075 | 7.5 | 7.5 | 19 | 63 |
| G9540080 | 8.0 | 8 | 19 | 63 |
| G9540085 | 8.5 | 8.5 | 19 | 67 |
| G9540090 | 9.0 | 9 | 19 | 67 |
| G9540095 | 9.5 | 9.5 | 22 | 72 |
| G9540100 | 10.0 | 10 | 22 | 72 |
| G9540110 | 11.0 | 11 | 26 | 83 |
| G9540120 | 12.0 | 12 | 26 | 83 |
| G9540130 | 13.0 | 13 | 26 | 83 |
| G9540140 | 14.0 | 14 | 26 | 83 |
| G9540150 | 15.0 | 15 | 32 | 92 |
| G9540160 | 16.0 | 16 | 32 | 92 |
| G9540180 | 18.0 | 18 | 32 | 92 |
| G9540200 | 20.0 | 20 | 38 | 104 |

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |


◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 3 | 25 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE LONG LENGTH

G9449 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.

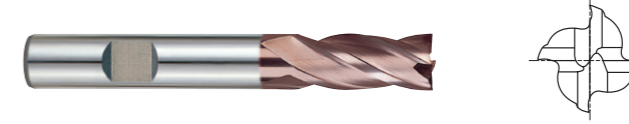

Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9449901 | 2.0 | ● 3 | 7 | 38 |
| G9449030 | 3.0 | 6 | 8 | 57 |
| G9449035 | 3.5 | 6 | 10 | 57 |
| G9449040 | 4.0 | 6 | 11 | 57 |
| G9449045 | 4.5 | 6 | 11 | 57 |
| G9449050 | 5.0 | 6 | 13 | 57 |
| G9449060 | 6.0 | 6 | 13 | 57 |
| G9449070 | 7.0 | 8 | 16 | 63 |
| G9449080 | 8.0 | 8 | 19 | 63 |
| G9449090 | 9.0 | 10 | 19 | 72 |
| G9449100 | 10.0 | 10 | 22 | 72 |
| G9449120 | 12.0 | 12 | 26 | 83 |
| G9449140 | 14.0 | 14 | 26 | 83 |
| G9449160 | 16.0 | 16 | 32 | 92 |
| G9449180 | 18.0 | 18 | 32 | 92 |
| G9449200 | 20.0 | 20 | 38 | 104 |

● with plain shank

| | |
|--------------------------|----------------------|
| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
| 0 ~ - 0.03 | h5 |


◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 3 | 25 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE LONG LENGTH WITH CHAMFER

G9G51 FLAT SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.

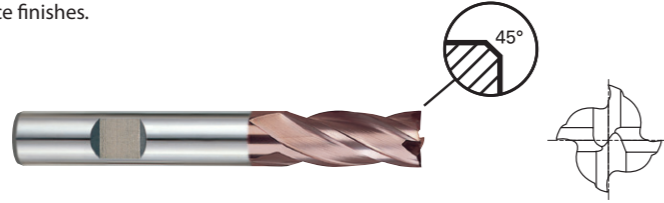

Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length | Chamfer |
|----------|---------------|----------------|---------------|----------------|---------|
| G9G51030 | 3.0 | 6 | 8 | 57 | 0.10 |
| G9G51040 | 4.0 | 6 | 11 | 57 | 0.10 |
| G9G51050 | 5.0 | 6 | 13 | 57 | 0.10 |
| G9G51060 | 6.0 | 6 | 13 | 57 | 0.10 |
| G9G51080 | 8.0 | 8 | 19 | 63 | 0.13 |
| G9G51100 | 10.0 | 10 | 22 | 72 | 0.13 |
| G9G51120 | 12.0 | 12 | 26 | 83 | 0.18 |
| G9G51140 | 14.0 | 14 | 26 | 83 | 0.18 |
| G9G51160 | 16.0 | 16 | 32 | 92 | 0.18 |
| G9G51200 | 20.0 | 20 | 38 | 104 | 0.23 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |



◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 55 | | |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE EXTRA LONG LENGTH

G9453 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.



Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9453903 | 3.0 | 3 | 20 | 60 |
| G9453030 | 3.0 | 3 | 30 | 75 |
| G9453904 | 4.0 | 4 | 20 | 60 |
| G9453040 | 4.0 | 4 | 30 | 75 |
| G9453905 | 5.0 | 5 | 25 | 75 |
| G9453050 | 5.0 | 5 | 40 | 100 |
| G9453906 | 6.0 | 6 | 30 | 75 |
| G9453060 | 6.0 | 6 | 50 | 150 |
| G9453908 | 8.0 | 8 | 30 | 75 |
| G9453080 | 8.0 | 8 | 50 | 150 |
| G9453910 | 10.0 | 10 | 40 | 100 |
| G9453100 | 10.0 | 10 | 60 | 150 |
| G9453912 | 12.0 | 12 | 45 | 100 |
| G9453120 | 12.0 | 12 | 75 | 150 |
| G9453914 | 14.0 | 14 | 45 | 100 |
| G9453140 | 14.0 | 14 | 65 | 150 |
| G9453916 | 16.0 | 16 | 45 | 100 |
| G9453160 | 16.0 | 16 | 65 | 150 |
| G9453918 | 18.0 | 18 | 45 | 100 |
| G9453180 | 18.0 | 18 | 65 | 150 |
| G9453920 | 20.0 | 20 | 45 | 100 |
| G9453200 | 20.0 | 20 | 65 | 150 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 130 | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | S | | | | | | H | | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|------------------------|-----|-----------------------------|----|-----|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 55 | | |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

TiAIN-COATED SOLID CARBIDE END MILLS 4&6 FLUTE 45° HELIX SHORT / LONG LENGTH

G9F45 PLAIN SHANK
G9F46 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.



SHORT

Unit : mm


| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length | No. of Flute |
|----------|---------------|----------------|---------------|----------------|--------------|
| G9F45030 | 3.0 | 4 | 6 | 50 | 4 |
| G9F45040 | 4.0 | 4 | 11 | 50 | 4 |
| G9F45050 | 5.0 | 6 | 13 | 50 | 6 |
| G9F45060 | 6.0 | 6 | 16 | 50 | 6 |
| G9F45080 | 8.0 | 8 | 19 | 60 | 6 |
| G9F45100 | 10.0 | 10 | 22 | 75 | 6 |
| G9F45120 | 12.0 | 12 | 26 | 75 | 6 |
| G9F45140 | 14.0 | 14 | 30 | 90 | 6 |
| G9F45160 | 16.0 | 16 | 32 | 100 | 6 |
| G9F45180 | 18.0 | 18 | 38 | 100 | 6 |
| G9F45000 | 20.0 | 20 | 38 | 100 | 6 |

LONG

Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length | No. of Flute |
|----------|---------------|----------------|---------------|----------------|--------------|
| G9F46120 | 12.0 | 12 | 50 | 100 | 6 |
| G9F46160 | 16.0 | 16 | 65 | 150 | 6 |
| G9F46200 | 20.0 | 20 | 75 | 150 | 6 |

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| 0 ~ - 0.03 | h5 |



◎ : Excellent ○ : Good


| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 21 | 21 |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ◎ | ○ | ◎ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

| ISO Material Description | N | | | | S | | | | | | | H | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|------------------------|----|-----------------------------|-----|-----|-----|-----|-----------------|----------------|-------------------|--------------------|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | | Titanium Alloys | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 55 | 55 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 400 | 550 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

X-COATED SOLID CARBIDE END MILLS MULTI FLUTE LONG LENGTH ROUGHING - COARSE

G9A42 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Fast chip ejection.

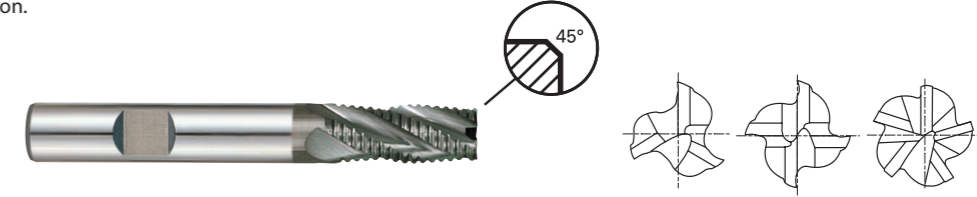


Unit : mm

| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length | No. of Flute | Chamfer |
|----------|---------------|----------------|---------------|----------------|--------------|---------|
| | h10 | h5 | | | | |
| G9A42060 | 6.0 | 6 | 16 | 57 | 3 | 0.60 |
| G9A42080 | 8.0 | 8 | 16 | 63 | 3 | 0.60 |
| G9A42100 | 10.0 | 10 | 22 | 72 | 4 | 0.60 |
| G9A42120 | 12.0 | 12 | 26 | 83 | 4 | 0.74 |
| G9A42140 | 14.0 | 14 | 26 | 83 | 4 | 0.94 |
| G9A42160 | 16.0 | 16 | 32 | 92 | 4 | 0.94 |
| G9A42180 | 18.0 | 18 | 32 | 92 | 4 | 0.94 |
| G9A42200 | 20.0 | 20 | 38 | 104 | 4 | 0.94 |
| G9A42250 | 25.0 | 25 | 45 | 121 | 5 | 0.94 |

Tolerances according to DIN 7160 & 7161

| Tolerance range in μm | | | | | |
|------------------------|-------------|-------------|--------------|---------------|---------------|
| Nominal-Diameter in mm | | | | | |
| | from 1 to 3 | over 3 to 6 | over 6 to 10 | over 10 to 18 | over 18 to 30 |
| h10 | 0 -40 | 0 -48 | 0 -58 | 0 -70 | 0 -84 |
| h5 | 0 -4 | 0 -5 | 0 -6 | 0 -8 | 0 -9 |

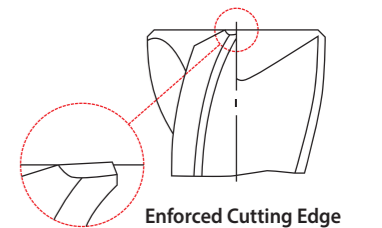

Enforced Cutting Edge

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | |
|--------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 21 | 21 |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ○ | ○ | ○ | ○ | ○ | ○ |

| ISO Material Description | N | | | | S | | | | | | | H | | | | | | | | | |
|--------------------------|------------------------|-----|------------------------|----|---|-----|----|------------------------|----|-----------------------------|-----|-----|-----|-----|-----------------|----------------|-------------------|--------------------|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | | Titanium Alloys | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | 55 | 60 | 42 | 55 | 55 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400 Rm | 1050 Rm | 400 | 550 | 400 | 550 |
| Recommended | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

TiAlN-COATED SOLID CARBIDE END MILLS
2 FLUTE DRILL MILLS

G9400 PLAIN SHANK




| EDP No. | Mill Diameter | Shank Diameter | Length of Cut | Overall Length |
|----------|---------------|----------------|---------------|----------------|
| G9400030 | 3.0 | 4 | 6 | 50 |
| G9400040 | 4.0 | 5 | 8 | 50 |
| G9400050 | 5.0 | 6 | 10 | 50 |
| G9400060 | 6.0 | 8 | 12 | 60 |
| G9400080 | 8.0 | 10 | 16 | 70 |
| G9400100 | 10.0 | 12 | 18 | 70 |
| G9400120 | 12.0 | 12 | 20 | 70 |
| G9400140 | 14.0 | 14 | 24 | 80 |
| G9400160 | 16.0 | 16 | 26 | 80 |
| G9400200 | 20.0 | 20 | 32 | 100 |


Unit : mm

► TiN, TiCN and TiAlN Coatings are available on your request.

- Performs many drilling and milling operations that are not presently done with the standard end mill.
- Among the many vertical milling machine operations, applications for the Drill Mill are:
Drilling, Slotting, NC Milling, Drilling & Slotting, Profile Milling and Chamfering.

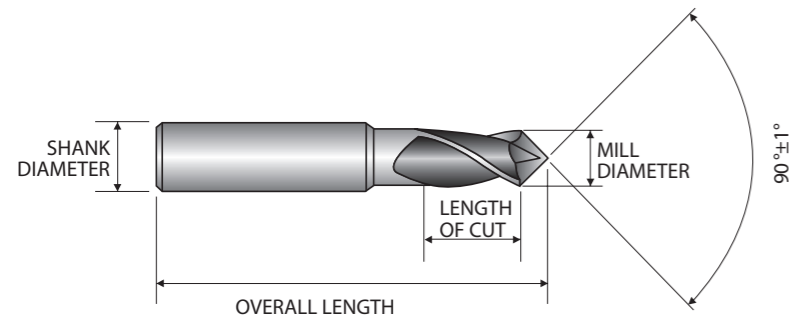

| Mill Dia. Tolerance (mm) | Shank Dia. Tolerance |
|--------------------------|----------------------|
| ∅3 ~ ∅10=h9 | h5 |
| ∅12 ~ ∅20=d9 | |

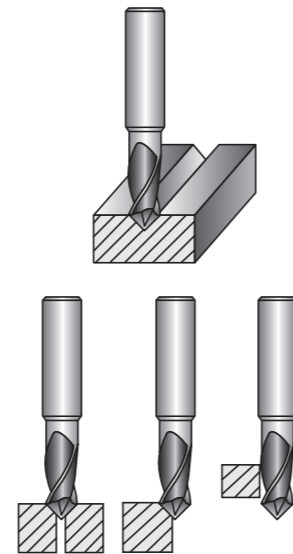

◎ : Excellent ○ : Good

| ISO Material Description | P | | | | | | | | | | M | | | | K | | | | | | |
|-----------------------------|-----------------|-----|-----|-----|-----|-----------------|-----|-----|-----|-----|------------------------------------|-----|-----|-----|-----------------|-----|----------------|-----|-------------------|-----|---------------------|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 30 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | 21 | | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |

| ISO Material Description | N | | | | | S | | | | | H | | | | | | | | | | |
|-----------------------------|------------------------|-----|------------------------|----|-----|---|----|-----|------------------------|----|-----------------------------|-----|-----------------|-----|----------------|-------------------|--------------------|-----|-----|-----|-----|
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | Heat Resistant Super Alloys | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 15 | 30 | 25 | 38 | 34 | 400 Rm | 1050 Rm | 55 | 60 | 42 | 55 |
| HB | | | | | | | | | | | 200 | 280 | 250 | 350 | 320 | | | 550 | 630 | 400 | 550 |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |

RECOMMENDED CUTTING CONDITIONS


G9624, G9A70, G9437, G9438, G9454, G9455 SERIES

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm

2 FLUTE BALL NOSE

| ISO | VDI 3323 | Material Description | Ae | Parameter | Mill Diameter (∅) | | | | | | | | | | | | | | | |
|-------------|------------------------|--|-------|-----------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|--|--|--|
| | | | | | 2.0 | 3.0 | 4.0 | 5.0 | 6.0 | 8.0 | 10.0 | 12.0 | 14.0 | 16.0 | 18.0 | 20.0 | | | | |
| P | 1-4 | Non-alloy steel | 0.2D | Vc | 80 | 105 | 110 | 125 | 135 | 155 | 170 | 190 | 200 | 205 | 215 | 225 | | | | |
| | | | | fz | 0.026 | 0.025 | 0.035 | 0.045 | 0.06 | 0.089 | 0.122 | 0.15 | 0.165 | 0.18 | 0.188 | 0.201 | | | | |
| | | | | RPM | 12732 | 11141 | 8754 | 7958 | 7162 | 6167 | 5411 | 5040 | 4547 | 4078 | 3802 | 3581 | | | | |
| | | | | FEED | 662 | 557 | 613 | 716 | 859 | 1098 | 1320 | 1512 | 1501 | 1468 | 1430 | 1440 | | | | |
| | Ap | | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | | | | | |
| | 5 | | 0.2D | Vc | 55 | 80 | 90 | 95 | 110 | 125 | 135 | 150 | 160 | 160 | 170 | 175 | | | | |
| | | | | fz | 0.023 | 0.023 | 0.031 | 0.04 | 0.06 | 0.08 | 0.1 | 0.12 | 0.128 | 0.141 | 0.148 | 0.158 | | | | |
| | | | | RPM | 8754 | 8488 | 7162 | 6048 | 5836 | 4974 | 4297 | 3979 | 3638 | 3183 | 3006 | 2785 | | | | |
| | | FEED | | 403 | 390 | 444 | 484 | 700 | 796 | 859 | 955 | 931 | 898 | 890 | 880 | | | | | |
| | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | | | | | | |
| | 6-7 | 0.2D | Vc | 80 | 105 | 110 | 125 | 135 | 155 | 170 | 190 | 200 | 205 | 215 | 225 | | | | | |
| | | | fz | 0.026 | 0.025 | 0.035 | 0.045 | 0.06 | 0.089 | 0.122 | 0.15 | 0.165 | 0.18 | 0.188 | 0.201 | | | | | |
| RPM | | | 12732 | 11141 | 8754 | 7958 | 7162 | 6167 | 5411 | 5040 | 4547 | 4078 | 3802 | 3581 | | | | | | |
| FEED | | | 662 | 557 | 613 | 716 | 859 | 1098 | 1320 | 1512 | 1501 | 1468 | 1430 | 1440 | | | | | | |
| Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | | | | | | | |
| 8-9 | 0.2D | Vc | 55 | 80 | 90 | 95 | 110 | 125 | 135 | 150 | 160 | 160 | 170 | 175 | | | | | | |
| | | fz | 0.023 | 0.023 | 0.031 | 0.04 | 0.06 | 0.08 | 0.1 | 0.12 | 0.128 | 0.141 | 0.148 | 0.158 | | | | | | |
| | | RPM | 8754 | 8488 | 7162 | 6048 | 5836 | 4974 | 4297 | 3979 | 3638 | 3183 | 3006 | 2785 | | | | | | |
| | | FEED | 403 | 390 | 444 | 484 | 700 | 796 | 859 | 955 | 931 | 898 | 890 | 880 | | | | | | |
| Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | | | | | | | |
| 10 | 0.2D | Vc | 80 | 105 | 110 | 125 | 135 | 155 | 170 | 190 | 200 | 205 | 215 | 225 | | | | | | |
| | | fz | 0.026 | 0.025 | 0.035 | 0.045 | 0.06 | 0.089 | 0.122 | 0.15 | 0.165 | 0.18 | 0.188 | 0.201 | | | | | | |
| | | RPM | 12732 | 11141 | 8754 | 7958 | 7162 | 6167 | 5411 | 5040 | 4547 | 4078 | 3802 | 3581 | | | | | | |
| | | FEED | 662 | 557 | 613 | 716 | 859 | 1098 | 1320 | 1512 | 1501 | 1468 | 1430 | 1440 | | | | | | |
| Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | | | | | | | |
| 11.1 - 11.2 | 0.2D | Vc | 55 | 80 | 90 | 95 | 110 | 125 | 135 | 150 | 160 | 160 | 170 | 175 | | | | | | |
| | | fz | 0.023 | 0.023 | 0.031 | 0.04 | 0.06 | 0.08 | 0.1 | 0.12 | 0.128 | 0.141 | 0.148 | 0.158 | | | | | | |
| | | RPM | 8754 | 8488 | 7162 | 6048 | 5836 | 4974 | 4297 | 3979 | 3638 | 3183 | 3006 | 2785 | | | | | | |
| | | FEED | 403 | 390 | 444 | 484 | 700 | 796 | 859 | 955 | 931 | 898 | 890 | 880 | | | | | | |
| Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | | | | | | | |
| K | 15-20 | Grey cast iron Nodular cast iron Malleable cast iron | 0.7D | Vc | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | | | | | |
| | | | | fz | 0.01 | 0.016 | 0.028 | 0.04 | 0.053 | 0.092 | 0.112 | 0.131 | 0.164 | 0.177 | 0.209 | 0.2 | | | | |
| | | | | RPM | 10345 | 6897 | 5173 | 4138 | 3448 | 2586 | 2069 | 1724 | 1364 | 1293 | 1061 | 1035 | | | | |
| | | | | FEED | 207 | 221 | 290 | 331 | 366 | 476 | 463 | 452 | 447 | 458 | 444 | 414 | | | | |
| Ap | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | | | | | | | |
| N | 21~22 | Aluminum-wrought alloy | 0.7D | Vc | 195 | 195 | 195 | 190 | 195 | 200 | 195 | 195 | 190 | 195 | 190 | 185 | | | | |
| | | | | fz | 0.006 | 0.01 | 0.013 | 0.019 | 0.023 | 0.034 | 0.044 | 0.061 | 0.073 | 0.07 | 0.079 | 0.092 | | | | |
| | | | | RPM | 31035 | 20690 | 15518 | 12096 | 10345 | 7958 | 6207 | 5173 | 4320 | 3879 | 3360 | 2944 | | | | |
| | | | | FEED | 372 | 414 | 403 | 460 | 476 | 541 | 546 | 631 | 631 | 543 | 531 | 542 | | | | |
| Ap | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | | | | | | | |
| 23~25 | Aluminum-cast, alloyed | 0.7D | Vc | 195 | 195 | 195 | 190 | 195 | 200 | 195 | 195 | 190 | 195 | 190 | 185 | | | | | |
| | | | fz | 0.006 | 0.01 | 0.013 | 0.019 | 0.023 | 0.034 | 0.044 | 0.061 | 0.073 | 0.07 | 0.079 | 0.092 | | | | | |
| | | | RPM | 31035 | 20690 | 15518 | 12096 | 10345 | 7958 | 6207 | 5173 | 4320 | 3879 | 3360 | 2944 | | | | | |
| | | | FEED | 372 | 414 | 403 | 460 | 476 | 541 | 546 | 631 | 631 | 543 | 531 | 542 | | | | | |
| Ap | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | | | | | | | |
| H | 38.1 | Hardened steel | 0.2D | Vc | 25 | 35 | 45 | 50 | 50 | 50 | 55 | 55 | 55 | 60 | 60 | 60 | | | | |
| | | | | fz | 0.016 | 0.016 | 0.021 | 0.024 | 0.03 | 0.046 | 0.054 | 0.07 | 0.081 | 0.091 | 0.1 | 0.111 | | | | |
| | | | | RPM | 3979 | 3714 | 3581 | 3183 | 2653 | 1989 | 1751 | 1459 | 1251 | 1194 | 1061 | 955 | | | | |
| | | | | FEED | 127 | 119 | 150 | 153 | 159 | 183 | 189 | 204 | 203 | 217 | 212 | 212 | | | | |
| Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | | | | | | | |
| 40 | Chilled Cast Iron | 0.2D | Vc | 55 | 80 | 90 | 95 | 110 | 125 | 135 | 150 | 160 | 160 | 170 | 175 | | | | | |
| | | | fz | 0.023 | 0.023 | 0.031 | 0.04 | 0.06 | 0.08 | 0.1 | 0.12 | 0.128 | 0.141 | 0.148 | 0.158 | | | | | |
| | | | RPM | 8754 | 8488 | 7162 | 6048 | 5836 | 4974 | 4297 | 3979 | 3638 | 3183 | 3006 | 2785 | | | | | |
| | | | FEED | 403 | 390 | 444 | 484 | 700 | 796 | 859 | 955 | 931 | 898 | 890 | 880 | | | | | |
| Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | | | | | | | |

※ The FEED, in long & extra long types, should be reduced by around 50%



G9B81 SERIES


2 FLUTE BALL NOSE

| ISO | VDI 3323 | Material Description | Parameter | Mill Diameter (Ø) | | | | |
|-------------------|------------------------------------|----------------------|-------------|-------------------|-------------|-------------|-------------|-------------|
| | | | | 0.4 | 0.5 | 0.6 | 0.8 | 1.0 |
| P | 1-4 | Non-alloy steel | Vc | 33~43 | 41~53 | 50~64 | 66~85 | 77~97 |
| | | | fz | 0.003~0.006 | 0.003~0.006 | 0.004~0.008 | 0.004~0.008 | 0.004~0.010 |
| | | | RPM | 26350~34000 | 26350~34000 | 26350~34000 | 26350~34000 | 24650~31000 |
| | | | FEED | 150~415 | 150~415 | 190~535 | 190~535 | 210~595 |
| | | | Ap | 0.018~0.036 | 0.023~0.045 | 0.027~0.054 | 0.036~0.072 | 0.045~0.090 |
| | | | Ap | 0.018~0.036 | 0.023~0.045 | 0.027~0.054 | 0.036~0.072 | 0.045~0.090 |
| | 5 | Non-alloy steel | Vc | 24~30 | 30~38 | 36~46 | 48~61 | 55~69 |
| | | | fz | 0.002~0.005 | 0.002~0.005 | 0.002~0.006 | 0.002~0.006 | 0.003~0.007 |
| | | | RPM | 19100~24200 | 19100~24200 | 19100~24200 | 19100~24200 | 17400~22100 |
| | | | FEED | 75~230 | 75~230 | 95~300 | 95~300 | 105~330 |
| | | | Ap | 0.018~0.036 | 0.023~0.045 | 0.027~0.054 | 0.036~0.072 | 0.045~0.090 |
| | | | Ap | 0.018~0.036 | 0.023~0.045 | 0.027~0.054 | 0.036~0.072 | 0.045~0.090 |
| | 6-7 | Low alloy steel | Vc | 33~43 | 41~53 | 50~64 | 66~85 | 77~97 |
| | | | fz | 0.003~0.006 | 0.003~0.006 | 0.004~0.008 | 0.004~0.008 | 0.004~0.010 |
| | | | RPM | 26350~34000 | 26350~34000 | 26350~34000 | 26350~34000 | 24650~31000 |
| | | | FEED | 150~415 | 150~415 | 190~535 | 190~535 | 210~595 |
| | | | Ap | 0.018~0.036 | 0.023~0.045 | 0.027~0.054 | 0.036~0.072 | 0.045~0.090 |
| | | | Ap | 0.018~0.036 | 0.023~0.045 | 0.027~0.054 | 0.036~0.072 | 0.045~0.090 |
| 8-9 | Low alloy steel | Vc | 24~30 | 30~38 | 36~46 | 48~61 | 55~69 | |
| | | fz | 0.002~0.005 | 0.002~0.005 | 0.002~0.006 | 0.002~0.006 | 0.003~0.007 | |
| | | RPM | 19100~24200 | 19100~24200 | 19100~24200 | 19100~24200 | 17400~22100 | |
| | | FEED | 75~230 | 75~230 | 95~300 | 95~300 | 105~330 | |
| | | Ap | 0.018~0.036 | 0.023~0.045 | 0.027~0.054 | 0.036~0.072 | 0.045~0.090 | |
| | | Ap | 0.018~0.036 | 0.023~0.045 | 0.027~0.054 | 0.036~0.072 | 0.045~0.090 | |
| 10 | High alloyed steel, and tool steel | Vc | 33~43 | 41~53 | 50~64 | 66~85 | 77~97 | |
| | | fz | 0.003~0.006 | 0.003~0.006 | 0.004~0.008 | 0.004~0.008 | 0.004~0.010 | |
| | | RPM | 26350~34000 | 26350~34000 | 26350~34000 | 26350~34000 | 24650~31000 | |
| | | FEED | 150~415 | 150~415 | 190~535 | 190~535 | 210~595 | |
| | | Ap | 0.018~0.036 | 0.023~0.045 | 0.027~0.054 | 0.036~0.072 | 0.045~0.090 | |
| | | Ap | 0.018~0.036 | 0.023~0.045 | 0.027~0.054 | 0.036~0.072 | 0.045~0.090 | |
| 11.1 - 11.2 | High alloyed steel, and tool steel | Vc | 24~30 | 30~38 | 36~46 | 48~61 | 55~69 | |
| | | fz | 0.002~0.005 | 0.002~0.005 | 0.002~0.006 | 0.002~0.006 | 0.003~0.007 | |
| | | RPM | 19100~24200 | 19100~24200 | 19100~24200 | 19100~24200 | 17400~22100 | |
| | | FEED | 75~230 | 75~230 | 95~300 | 95~300 | 105~330 | |
| | | Ap | 0.018~0.036 | 0.023~0.045 | 0.027~0.054 | 0.036~0.072 | 0.045~0.090 | |
| | | Ap | 0.018~0.036 | 0.023~0.045 | 0.027~0.054 | 0.036~0.072 | 0.045~0.090 | |

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm

※ The FEED, in long & extra long types, should be reduced by around 50%

▶ NEXT PAGE

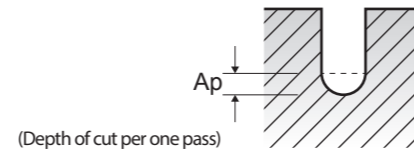


G9B81 SERIES

2 FLUTE BALL NOSE

| VDI 3323 | Material Description | Parameter | Mill Diameter (Ø) | | | | | | | | |
|-------------------|------------------------------------|-----------------|-------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | | | 1.2 | 1.4 | 1.5 | 1.6 | 1.8 | 2.0 | 3.0 | 4.0 | |
| P | 1-4 | Non-alloy steel | Vc | 77~98 | 79~97 | 75~97 | 78~101 | 82~103 | 82~101 | 85~104 | 90~117 |
| | | | fz | 0.005~0.013 | 0.006~0.015 | 0.007~0.016 | 0.007~0.017 | 0.007~0.018 | 0.008~0.021 | 0.012~0.030 | 0.015~0.036 |
| | | | RPM | 20500~26000 | 18000~22000 | 16000~20500 | 15500~20000 | 14500~18200 | 13000~16000 | 9000~11000 | 7200~9350 |
| | | | FEED | 210~665 | 210~665 | 210~665 | 210~665 | 210~665 | 210~665 | 210~665 | 210~665 |
| | | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.135~0.270 | 0.180~0.360 |
| | | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.135~0.270 | 0.180~0.360 |
| | 5 | Non-alloy steel | Vc | 55~69 | 56~67 | 54~70 | 56~70 | 58~72 | 59~72 | 57~108 | 63~83 |
| | | | fz | 0.004~0.009 | 0.004~0.011 | 0.005~0.011 | 0.005~0.012 | 0.005~0.013 | 0.006~0.014 | 0.009~0.014 | 0.011~0.025 |
| | | | RPM | 14500~18300 | 12800~15300 | 11500~14900 | 11200~14000 | 10200~12800 | 9400~11500 | 6000~11500 | 5000~6600 |
| | | | FEED | 105~330 | 105~330 | 105~330 | 105~330 | 105~330 | 105~330 | 105~330 | 105~330 |
| | | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.135~0.270 | 0.180~0.360 |
| | | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.135~0.270 | 0.180~0.360 |
| | 6-7 | Low alloy steel | Vc | 77~98 | 79~97 | 75~97 | 78~101 | 82~103 | 82~101 | 85~104 | 90~117 |
| | | | fz | 0.005~0.013 | 0.006~0.015 | 0.007~0.016 | 0.007~0.017 | 0.007~0.018 | 0.008~0.021 | 0.012~0.030 | 0.015~0.036 |
| | | | RPM | 20500~26000 | 18000~22000 | 16000~20500 | 15500~20000 | 14500~18200 | 13000~16000 | 9000~11000 | 7200~9350 |
| | | | FEED | 210~665 | 210~665 | 210~665 | 210~665 | 210~665 | 210~665 | 210~665 | 210~665 |
| | | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.135~0.270 | 0.180~0.360 |
| | | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.135~0.270 | 0.180~0.360 |
| 8-9 | Low alloy steel | Vc | 55~69 | 56~67 | 54~70 | 56~70 | 58~72 | 59~72 | 57~108 | 63~83 | |
| | | fz | 0.004~0.009 | 0.004~0.011 | 0.005~0.011 | 0.005~0.012 | 0.005~0.013 | 0.006~0.014 | 0.009~0.014 | 0.011~0.025 | |
| | | RPM | 14500~18300 | 12800~15300 | 11500~14900 | 11200~14000 | 10200~12800 | 9400~11500 | 6000~11500 | 5000~6600 | |
| | | FEED | 105~330 | 105~330 | 105~330 | 105~330 | 105~330 | 105~330 | 105~330 | 105~330 | |
| | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.135~0.270 | 0.180~0.360 | |
| | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.135~0.270 | 0.180~0.360 | |
| 10 | High alloyed steel, and tool steel | Vc | 77~98 | 79~97 | 75~97 | 78~101 | 82~103 | 82~101 | 85~104 | 90~117 | |
| | | fz | 0.005~0.013 | 0.006~0.015 | 0.007~0.016 | 0.007~0.017 | 0.007~0.018 | 0.008~0.021 | 0.012~0.030 | 0.015~0.036 | |
| | | RPM | 20500~26000 | 18000~22000 | 16000~20500 | 15500~20000 | 14500~18200 | 13000~16000 | 9000~11000 | 7200~9350 | |
| | | FEED | 210~665 | 210~665 | 210~665 | 210~665 | 210~665 | 210~665 | 210~665 | 210~665 | |
| | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.135~0.270 | 0.180~0.360 | |
| | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.135~0.270 | 0.180~0.360 | |
| 11.1 - 11.2 | High alloyed steel, and tool steel | Vc | 55~69 | 56~67 | 54~70 | 56~70 | 58~72 | 59~72 | 57~108 | 63~83 | |
| | | fz | 0.004~0.009 | 0.004~0.011 | 0.005~0.011 | 0.005~0.012 | 0.005~0.013 | 0.006~0.014 | 0.009~0.014 | 0.011~0.025 | |
| | | RPM | 14500~18300 | 12800~15300 | 11500~14900 | 11200~14000 | 10200~12800 | 9400~11500 | 6000~11500 | 5000~6600 | |
| | | FEED | 105~330 | 105~330 | 105~330 | 105~330 | 105~330 | 105~330 | 105~330 | 105~330 | |
| | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.135~0.270 | 0.180~0.360 | |
| | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.135~0.270 | 0.180~0.360 | |

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm

※ The FEED, in long & extra long types, should be reduced by around 50%

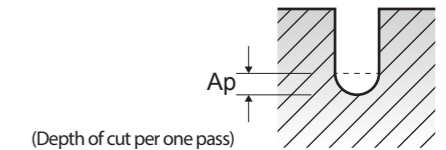


G9634 SERIES

4 FLUTE BALL NOSE

| ISO | VDI 3323 | Material Description | Ae | Parameter | Mill Diameter (Ø) | | | | | | | | | | | | |
|-------------|------------------------------------|--|------|-----------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|
| | | | | | 2.0 | 3.0 | 4.0 | 5.0 | 6.0 | 8.0 | 10.0 | 12.0 | 14.0 | 16.0 | 18.0 | 20.0 | |
| P | 1-4 | Non-alloy steel | 0.2D | Vc | 85 | 110 | 110 | 125 | 135 | 155 | 170 | 190 | 200 | 205 | 215 | 225 | |
| | | | | fz | 0.013 | 0.019 | 0.027 | 0.033 | 0.046 | 0.068 | 0.089 | 0.112 | 0.124 | 0.136 | 0.14 | 0.15 | |
| | | | | RPM | 13528 | 11671 | 8754 | 7958 | 7162 | 6167 | 5411 | 5040 | 4547 | 4078 | 3802 | 3581 | |
| | | | | FEED | 703 | 887 | 945 | 1050 | 1318 | 1677 | 1926 | 2258 | 2255 | 2219 | 2129 | 2149 | |
| | | | | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | |
| | | | | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | |
| | 5 | Non-alloy steel | 0.2D | Vc | 65 | 80 | 90 | 95 | 110 | 125 | 135 | 150 | 160 | 160 | 170 | 175 | |
| | | | | fz | 0.01 | 0.017 | 0.024 | 0.03 | 0.046 | 0.06 | 0.076 | 0.089 | 0.099 | 0.108 | 0.111 | 0.119 | |
| | | | | RPM | 10345 | 8488 | 7162 | 6048 | 5836 | 4974 | 4297 | 3979 | 3638 | 3183 | 3006 | 2785 | |
| | | | | FEED | 414 | 577 | 688 | 726 | 1074 | 1194 | 1306 | 1416 | 1441 | 1375 | 1335 | 1326 | |
| | | | | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | |
| | | | | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | |
| 6-7 | Low alloy steel | 0.2D | Vc | 85 | 110 | 110 | 125 | 135 | 155 | 170 | 190 | 200 | 205 | 215 | 225 | | |
| | | | fz | 0.013 | 0.019 | 0.027 | 0.033 | 0.046 | 0.068 | 0.089 | 0.112 | 0.124 | 0.136 | 0.14 | 0.15 | | |
| | | | RPM | 13528 | 11671 | 8754 | 7958 | 7162 | 6167 | 5411 | 5040 | 4547 | 4078 | 3802 | 3581 | | |
| | | | FEED | 703 | 887 | 945 | 1050 | 1318 | 1677 | 1926 | 2258 | 2255 | 2219 | 2129 | 2149 | | |
| | | | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | |
| | | | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | |
| 8-9 | Low alloy steel | 0.2D | Vc | 65 | 80 | 90 | 95 | 110 | 125 | 135 | 150 | 160 | 160 | 170 | 175 | | |
| | | | fz | 0.01 | 0.017 | 0.024 | 0.03 | 0.046 | 0.06 | 0.076 | 0.089 | 0.099 | 0.108 | 0.111 | 0.119 | | |
| | | | RPM | 10345 | 8488 | 7162 | 6048 | 5836 | 4974 | 4297 | 3979 | 3638 | 3183 | 3006 | 2785 | | |
| | | | FEED | 414 | 577 | 688 | 726 | 1074 | 1194 | 1306 | 1416 | 1441 | 1375 | 1335 | 1326 | | |
| | | | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | |
| | | | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | |
| 10 | High alloyed steel, and tool steel | 0.2D | Vc | 85 | 110 | 110 | 125 | 135 | 155 | 170 | 190 | 200 | 205 | 215 | 225 | | |
| | | | fz | 0.013 | 0.019 | 0.027 | 0.033 | 0.046 | 0.068 | 0.089 | 0.112 | 0.124 | 0.136 | 0.14 | 0.15 | | |
| | | | RPM | 13528 | 11671 | 8754 | 7958 | 7162 | 6167 | 5411 | 5040 | 4547 | 4078 | 3802 | 3581 | | |
| | | | FEED | 703 | 887 | 945 | 1050 | 1318 | 1677 | 1926 | 2258 | 2255 | 2219 | 2129 | 2149 | | |
| | | | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | |
| | | | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | |
| 11.1 - 11.2 | High alloyed steel, and tool steel | 0.2D | Vc | 65 | 80 | 90 | 95 | 110 | 125 | 135 | 150 | 160 | 160 | 170 | 175 | | |
| | | | fz | 0.01 | 0.017 | 0.024 | 0.03 | 0.046 | 0.06 | 0.076 | 0.089 | 0.099 | 0.108 | 0.111 | 0.119 | | |
| | | | RPM | 10345 | 8488 | 7162 | 6048 | 5836 | 4974 | 4297 | 3979 | 3638 | 3183 | 3006 | 2785 | | |
| | | | FEED | 414 | 577 | 688 | 726 | 1074 | 1194 | 1306 | 1416 | 1441 | 1375 | 1335 | 1326 | | |
| | | | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | |
| | | | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | |
| K | 15-20 | Grey cast iron Nodular cast iron Malleable cast iron | 0.7D | Vc | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 60 | 65 | 60 | 65 | | |
| | | | | fz | 0.008 | 0.012 | 0.021 | 0.03 | 0.04 | 0.068 | 0.083 | 0.097 | 0.125 | 0.135 | 0.159 | 0.15 | |
| | | | | RPM | 10345 | 6897 | 5173 | 4138 | 3448 | 2586 | 2069 | 1724 | 1364 | 1293 | 1061 | 1035 | |
| | | | | FEED | 331 | 331 | 434 | 497 | 552 | 703 | 687 | 669 | 682 | 698 | 675 | 621 | |
| | | | | Ap | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | |
| N | 21~22 | Aluminum-wrought alloy | 0.7D | Vc | 195 | 195 | 195 | 190 | 195 | 200 | 195 | 195 | 190 | 195 | 190 | 185 | |
| | | | | fz | 0.005 | 0.007 | 0.01 | 0.015 | 0.017 | 0.026 | 0.033 | 0.046 | 0.055 | 0.053 | 0.06 | 0.069 | |
| | | | | RPM | 31035 | 20690 | 15518 | 12096 | 10345 | 7958 | 6207 | 5173 | 4320 | 3879 | 3360 | 2944 | |
| | | | | FEED | 621 | 579 | 621 | 726 | 703 | 828 | 819 | 952 | 950 | 822 | 806 | 813 | |
| | | | | Ap | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | |
| | 23~25 | Aluminum-cast, alloyed | 0.7D | Vc | 195 | 195 | 195 | 190 | 195 | 200 | 195 | 195 | 190 | 195 | 190 | 185 | |
| | | | | fz | 0.005 | 0.007 | 0.01 | 0.015 | 0.017 | 0.026 | 0.033 | 0.046 | 0.055 | 0.053 | 0.06 | 0.069 | |
| | | | | RPM | 31035 | 20690 | 15518 | 12096 | 10345 | 7958 | 6207 | 5173 | 4320 | 3879 | 3360 | 2944 | |
| | | | | FEED | 621 | 579 | 621 | 726 | 703 | 828 | 819 | 952 | 950 | 822 | 806 | 813 | |
| | | | | Ap | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | |
| H | 38.1 | Hardened steel | 0.2D | Vc | 25 | 35 | 45 | 50 | 50 | 55 | 55 | 55 | 55 | 55 | 60 | 60 | |
| | | | | fz | 0.008 | 0.012 | 0.016 | 0.019 | 0.022 | 0.034 | 0.041 | 0.053 | 0.062 | 0.073 | 0.076 | 0.084 | |
| | | | | RPM | 3979 | 3714 | 3581 | 3183 | 2653 | 2188 | 1751 | 1459 | 1251 | 1094 | 1061 | 955 | |
| | | | | FEED | 127 | 178 | 229 | 242 | 233 | 298 | 287 | 309 | 310 | 320 | 323 | 321 | |
| | | | | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | |
| 40 | Chilled Cast Iron | 0.2D | Vc | 65 | 80 | 90 | 95 | 110 | 125 | 135 | 150 | 160 | 160 | 170 | 175 | | |
| | | | fz | 0.01 | 0.017 | 0.024 | 0.03 | 0.046 | 0.06 | 0.076 | 0.089 | 0.099 | 0.108 | 0.111 | 0.119 | | |
| | | | RPM | 10345 | 8488 | 7162 | 6048 | 5836 | 4974 | 4297 | 3979 | 3638 | 3183 | 3006 | 2785 | | |
| | | | FEED | 414 | 577 | 688 | 726 | 1074 | 1194 | 1306 | 1416 | 1441 | 1375 | 1335 | 1326 | | |
| | | | Ap | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | |

※ The FEED, in long & extra long types, should be reduced by around 50%



G9B82, G9B83 SERIES

2 FLUTE CORNER RADIUS - SLOTTING

| ISO | VDI 3323 | Material Description | Ae | Ap | Parameter | Mill Diameter (Ø) | | | | | | | |
|-------------|------------------------------------|----------------------|---------------------------|---------------------------|-----------|-------------------|-------|-------|-------|-------|-------|-------|-------|
| | | | | | | 2.0 | 3.0 | 4.0 | 5.0 | 6.0 | 8.0 | 10.0 | 12.0 |
| P | 1-4 | Non-alloy steel | 1.0D | 0.5D (Up to Ø3 : 0.2D) | Vc | 50 | 55 | 65 | 70 | 70 | 70 | 70 | 70 |
| | | | | | fz | 0.01 | 0.015 | 0.025 | 0.031 | 0.039 | 0.057 | 0.064 | 0.065 |
| | | | | | RPM | 7958 | 5836 | 5173 | 4456 | 3714 | 2785 | 2228 | 1857 |
| | | | | | FEED | 159 | 175 | 259 | 276 | 290 | 318 | 285 | 241 |
| | | | | | Vc | 30 | 35 | 40 | 40 | 45 | 45 | 40 | 45 |
| | | | | | fz | 0.01 | 0.016 | 0.025 | 0.031 | 0.041 | 0.05 | 0.05 | 0.048 |
| | 5 | Non-alloy steel | 1.0D | 0.5D (Up to Ø3 : 0.2D) | Vc | 30 | 35 | 40 | 40 | 45 | 45 | 40 | 45 |
| | | | | | fz | 0.01 | 0.016 | 0.025 | 0.031 | 0.041 | 0.05 | 0.05 | 0.048 |
| | | | | | RPM | 4775 | 3714 | 3183 | 2546 | 2387 | 1790 | 1273 | 1194 |
| | | | | | FEED | 95 | 119 | 159 | 158 | 196 | 179 | 127 | 115 |
| | | | | | Vc | 50 | 55 | 65 | 70 | 70 | 70 | 70 | 70 |
| | | | | | fz | 0.01 | 0.015 | 0.025 | 0.031 | 0.039 | 0.057 | 0.064 | 0.065 |
| 6-7 | Low alloy steel | 1.0D | 0.5D (Up to Ø3 : 0.2D) | Vc | 50 | 55 | 65 | 70 | 70 | 70 | 70 | 70 | |
| | | | | fz | 0.01 | 0.015 | 0.025 | 0.031 | 0.039 | 0.057 | 0.064 | 0.065 | |
| | | | | RPM | 7958 | 5836 | 5173 | 4456 | 3714 | 2785 | 2228 | 1857 | |
| | | | | FEED | 159 | 175 | 259 | 276 | 290 | 318 | 285 | 241 | |
| | | | | Vc | 30 | 35 | 40 | 40 | 45 | 45 | 40 | 45 | |
| | | | | fz | 0.01 | 0.016 | 0.025 | 0.031 | 0.041 | 0.05 | 0.05 | 0.048 | |
| 8-9 | Low alloy steel | 1.0D | 0.5D (Up to Ø3 : 0.2D) | Vc | 30 | 35 | 40 | 40 | 45 | 45 | 40 | 45 | |
| | | | | fz | 0.01 | 0.016 | 0.025 | 0.031 | 0.041 | 0.05 | 0.05 | 0.048 | |
| | | | | RPM | 4775 | 3714 | 3183 | 2546 | 2387 | 1790 | 1273 | 1194 | |
| | | | | FEED | 95 | 119 | 159 | 158 | 196 | 179 | 127 | 115 | |
| | | | | Vc | 50 | 55 | 65 | 70 | 70 | 70 | 70 | 70 | |
| | | | | fz | 0.01 | 0.015 | 0.025 | 0.031 | 0.039 | 0.057 | 0.064 | 0.065 | |
| 10 | High alloyed steel, and tool steel | 1.0D | 0.5D (Up to Ø3 : 0.2D) | Vc | 50 | 55 | 65 | 70 | 70 | 70 | 70 | 70 | |
| | | | | fz | 0.01 | 0.015 | 0.025 | 0.031 | 0.039 | 0.057 | 0.064 | 0.065 | |
| | | | | RPM | 7958 | 5836 | 5173 | 4456 | 3714 | 2785 | 2228 | 1857 | |
| | | | | FEED | 159 | 175 | 259 | 276 | 290 | 318 | 285 | 241 | |
| | | | | Vc | 30 | 35 | 40 | 40 | 45 | 45 | 40 | 45 | |
| | | | | fz | 0.01 | 0.016 | 0.025 | 0.031 | 0.041 | 0.05 | 0.05 | 0.048 | |
| 11.1 - 11.2 | High alloyed steel, and tool steel | 1.0D | 0.5D (Up to Ø3 : 0.2D) | Vc | 30 | 35 | 40 | 40 | 45 | 45 | 40 | 45 | |
| | | | | fz | 0.01 | 0.016 | 0.025 | 0.031 | 0.041 | 0.05 | 0.05 | 0.048 | |
| | | | | RPM | 4775 | 3714 | 3183 | 2546 | 2387 | 1790 | 1273 | 1194 | |
| | | | | FEED | 95 | 119 | 159 | 158 | 196 | 179 | 127 | 115 | |
| | | | | Vc | 25 | 30 | 35 | 35 | 35 | 35 | 35 | 35 | |
| | | | | fz | 0.009 | 0.016 | 0.025 | 0.031 | 0.04 | 0.053 | 0.059 | 0.058 | |
| M | 14.1 | Stainless steel | 1.0D | 0.5D (Up to Ø3 : 0.2D) | Vc | 25 | 30 | 35 | 35 | 35 | 35 | 35 | 35 |
| | | | | | fz | 0.009 | 0.016 | 0.025 | 0.031 | 0.04 | 0.053 | 0.059 | 0.058 |
| | | | | | RPM | 3979 | 3183 | | | | | | |

G9B84, G9B85 SERIES

4 FLUTE CORNER RADIUS - SIDE CUTTING

| ISO | VDI 3323 | Material Description | Ae | Ap | Parameter | Mill Diameter (Ø) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|--|------|------|-----------|-------------------|-----|-----|-----|-----|-----|-----|-----|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | | | | | 1.0 | 1.5 | 2.0 | 3.0 | 4.0 | 5.0 | 6.0 | 8.0 | 10.0 | 12.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P | 1-4 | Non-alloy steel | 0.1D | 1.0D | Vc | 55 | 55 | 60 | 70 | 80 | 85 | 90 | 90 | 85 | 90 | fz | 0.002 | 0.005 | 0.006 | 0.009 | 0.019 | 0.024 | 0.029 | 0.043 | 0.047 | 0.047 | RPM | 17507 | 11671 | 9549 | 7427 | 6366 | 5411 | 4775 | 3581 | 2706 | 2387 | FEED | 140 | 233 | 229 | 267 | 484 | 519 | 554 | 616 | 509 | 449 |
| | | | | | Vc | 30 | 35 | 40 | 45 | 50 | 50 | 55 | 55 | 55 | 55 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.019 | 0.024 | 0.031 | 0.038 | 0.038 | 0.037 | RPM | 9549 | 7427 | 6366 | 4775 | 3979 | 3183 | 2918 | 2188 | 1751 | 1459 | FEED | 76 | 119 | 153 | 172 | 302 | 306 | 362 | 333 | 266 | 216 |
| | 5 | Non-alloy steel | 0.1D | 1.0D | Vc | 55 | 55 | 60 | 70 | 80 | 85 | 90 | 90 | 85 | 90 | fz | 0.002 | 0.005 | 0.006 | 0.009 | 0.019 | 0.024 | 0.029 | 0.043 | 0.047 | 0.047 | RPM | 17507 | 11671 | 9549 | 7427 | 6366 | 5411 | 4775 | 3581 | 2706 | 2387 | FEED | 140 | 233 | 229 | 267 | 484 | 519 | 554 | 616 | 509 | 449 |
| | | | | | Vc | 30 | 35 | 40 | 45 | 50 | 50 | 55 | 55 | 55 | 55 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.019 | 0.024 | 0.031 | 0.038 | 0.038 | 0.037 | RPM | 9549 | 7427 | 6366 | 4775 | 3979 | 3183 | 2918 | 2188 | 1751 | 1459 | FEED | 76 | 119 | 153 | 172 | 302 | 306 | 362 | 333 | 266 | 216 |
| | 6-7 | Low alloy steel | 0.1D | 1.0D | Vc | 55 | 55 | 60 | 70 | 80 | 85 | 90 | 90 | 85 | 90 | fz | 0.002 | 0.005 | 0.006 | 0.009 | 0.019 | 0.024 | 0.029 | 0.043 | 0.047 | 0.047 | RPM | 17507 | 11671 | 9549 | 7427 | 6366 | 5411 | 4775 | 3581 | 2706 | 2387 | FEED | 140 | 233 | 229 | 267 | 484 | 519 | 554 | 616 | 509 | 449 |
| | | | | | Vc | 30 | 35 | 40 | 45 | 50 | 50 | 55 | 55 | 55 | 55 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.019 | 0.024 | 0.031 | 0.038 | 0.038 | 0.037 | RPM | 9549 | 7427 | 6366 | 4775 | 3979 | 3183 | 2918 | 2188 | 1751 | 1459 | FEED | 76 | 119 | 153 | 172 | 302 | 306 | 362 | 333 | 266 | 216 |
| | 8-9 | Low alloy steel | 0.1D | 1.0D | Vc | 55 | 55 | 60 | 70 | 80 | 85 | 90 | 90 | 85 | 90 | fz | 0.002 | 0.005 | 0.006 | 0.009 | 0.019 | 0.024 | 0.029 | 0.043 | 0.047 | 0.047 | RPM | 17507 | 11671 | 9549 | 7427 | 6366 | 5411 | 4775 | 3581 | 2706 | 2387 | FEED | 140 | 233 | 229 | 267 | 484 | 519 | 554 | 616 | 509 | 449 |
| | | | | | Vc | 30 | 35 | 40 | 45 | 50 | 50 | 55 | 55 | 55 | 55 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.019 | 0.024 | 0.031 | 0.038 | 0.038 | 0.037 | RPM | 9549 | 7427 | 6366 | 4775 | 3979 | 3183 | 2918 | 2188 | 1751 | 1459 | FEED | 76 | 119 | 153 | 172 | 302 | 306 | 362 | 333 | 266 | 216 |
| | 10 | High alloyed steel, and tool steel | 0.1D | 1.0D | Vc | 55 | 55 | 60 | 70 | 80 | 85 | 90 | 90 | 85 | 90 | fz | 0.002 | 0.005 | 0.006 | 0.009 | 0.019 | 0.024 | 0.029 | 0.043 | 0.047 | 0.047 | RPM | 17507 | 11671 | 9549 | 7427 | 6366 | 5411 | 4775 | 3581 | 2706 | 2387 | FEED | 140 | 233 | 229 | 267 | 484 | 519 | 554 | 616 | 509 | 449 |
| | | | | | Vc | 30 | 35 | 40 | 45 | 50 | 50 | 55 | 55 | 55 | 55 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.019 | 0.024 | 0.031 | 0.038 | 0.038 | 0.037 | RPM | 9549 | 7427 | 6366 | 4775 | 3979 | 3183 | 2918 | 2188 | 1751 | 1459 | FEED | 76 | 119 | 153 | 172 | 302 | 306 | 362 | 333 | 266 | 216 |
| | 11.1 - 11.2 | High alloyed steel, and tool steel | 0.1D | 1.0D | Vc | 55 | 55 | 60 | 70 | 80 | 85 | 90 | 90 | 85 | 90 | fz | 0.002 | 0.005 | 0.006 | 0.009 | 0.019 | 0.024 | 0.029 | 0.043 | 0.047 | 0.047 | RPM | 17507 | 11671 | 9549 | 7427 | 6366 | 5411 | 4775 | 3581 | 2706 | 2387 | FEED | 140 | 233 | 229 | 267 | 484 | 519 | 554 | 616 | 509 | 449 |
| | | | | | Vc | 30 | 35 | 40 | 45 | 50 | 50 | 55 | 55 | 55 | 55 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.019 | 0.024 | 0.031 | 0.038 | 0.038 | 0.037 | RPM | 9549 | 7427 | 6366 | 4775 | 3979 | 3183 | 2918 | 2188 | 1751 | 1459 | FEED | 76 | 119 | 153 | 172 | 302 | 306 | 362 | 333 | 266 | 216 |
| M | 14.1 | Stainless steel | 0.1D | 1.0D | Vc | 25 | 35 | 35 | 35 | 40 | 40 | 45 | 45 | 45 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.018 | 0.024 | 0.029 | 0.042 | 0.044 | 0.045 | RPM | 7958 | 7427 | 5570 | 3714 | 3183 | 2546 | 2387 | 1790 | 1432 | 1194 | FEED | 64 | 119 | 134 | 134 | 229 | 244 | 277 | 301 | 252 | 215 | |
| K | 15-20 | Grey cast iron Nodular cast iron Malleable cast iron | 1.0D | 1.0D | Vc | 60 | 55 | 60 | 55 | 60 | 55 | 55 | 55 | 60 | 55 | fz | 0.008 | 0.013 | 0.017 | 0.026 | 0.035 | 0.044 | 0.065 | 0.093 | 0.116 | 0.155 | RPM | 19099 | 11671 | 9549 | 5836 | 4775 | 3501 | 2918 | 2188 | 1910 | 1459 | FEED | 611 | 607 | 649 | 607 | 668 | 616 | 759 | 814 | 886 | 905 |
| | | | | | Vc | 140 | 130 | 140 | 145 | 140 | 145 | 145 | 145 | 145 | 145 | fz | 0.006 | 0.011 | 0.015 | 0.021 | 0.03 | 0.036 | 0.047 | 0.063 | 0.078 | 0.095 | RPM | 44563 | 27587 | 22282 | 15385 | 11141 | 9231 | 7692 | 5769 | 4615 | 3714 | FEED | 1070 | 1214 | 1337 | 1292 | 1337 | 1329 | 1446 | 1454 | 1440 | 1411 |
| | | | | | Vc | 140 | 130 | 140 | 145 | 140 | 145 | 145 | 145 | 145 | 145 | fz | 0.006 | 0.011 | 0.015 | 0.021 | 0.03 | 0.036 | 0.047 | 0.063 | 0.078 | 0.095 | RPM | 44563 | 27587 | 22282 | 15385 | 11141 | 9231 | 7692 | 5769 | 4615 | 3714 | FEED | 1070 | 1214 | 1337 | 1292 | 1337 | 1329 | 1446 | 1454 | 1440 | 1411 |
| | | | | | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 110 | 105 | 105 | fz | 0.006 | 0.011 | 0.016 | 0.024 | 0.029 | 0.038 | 0.048 | 0.063 | 0.081 | 0.096 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | FEED | 611 | 887 | 1070 | 1070 | 1015 | 1016 | 1070 | 1103 | 1083 | 1070 |
| N | 21~22 | Aluminum-wrought alloy | 1.0D | 1.0D | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 110 | 105 | fz | 0.006 | 0.011 | 0.016 | 0.024 | 0.029 | 0.038 | 0.048 | 0.063 | 0.081 | 0.096 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | FEED | 611 | 887 | 1070 | 1070 | 1015 | 1016 | 1070 | 1103 | 1083 | 1070 | |
| | | | | | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 110 | 105 | fz | 0.006 | 0.011 | 0.016 | 0.024 | 0.029 | 0.038 | 0.048 | 0.063 | 0.081 | 0.096 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | FEED | 611 | 887 | 1070 | 1070 | 1015 | 1016 | 1070 | 1103 | 1083 | 1070 | |
| | | | | | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 110 | 105 | fz | 0.006 | 0.011 | 0.016 | 0.024 | 0.029 | 0.038 | 0.048 | 0.063 | 0.081 | 0.096 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | FEED | 611 | 887 | 1070 | 1070 | 1015 | 1016 | 1070 | 1103 | 1083 | 1070 | |
| | | | | | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 110 | 105 | fz | 0.006 | 0.011 | 0.016 | 0.024 | 0.029 | 0.038 | 0.048 | 0.063 | 0.081 | 0.096 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | FEED | 611 | 887 | 1070 | 1070 | 1015 | 1016 | 1070 | 1103 | 1083 | 1070 | |
| 23~25 | Aluminum-cast, alloyed | 1.0D | 1.0D | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 110 | 105 | fz | 0.006 | 0.011 | 0.016 | 0.024 | 0.029 | 0.038 | 0.048 | 0.063 | 0.081 | 0.096 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | FEED | 611 | 887 | 1070 | 1070 | 1015 | 1016 | 1070 | 1103 | 1083 | 1070 | | |
| | | | | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 110 | 105 | fz | 0.006 | 0.011 | 0.016 | 0.024 | 0.029 | 0.038 | 0.048 | 0.063 | 0.081 | 0.096 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | FEED | 611 | 887 | 1070 | 1070 | 1015 | 1016 | 1070 | 1103 | 1083 | 1070 | | |
| 26-28 | Copper and Copper Alloys (Bronze / Brass) | 1.0D | 1.0D | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 110 | 105 | fz | 0.006 | 0.011 | 0.016 | 0.024 | 0.029 | 0.038 | 0.048 | 0.063 | 0.081 | 0.096 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | FEED | 611 | 887 | 1070 | 1070 | 1015 | 1016 | 1070 | 1103 | 1083 | 1070 | | |
| | | | | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 110 | 105 | fz | 0.006 | 0.011 | 0.016 | 0.024 | 0.029 | 0.038 | 0.048 | 0.063 | 0.081 | 0.096 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | FEED | 611 | 887 | 1070 | 1070 | 1015 | 1016 | 1070 | 1103 | 1083 | 1070 | | |
| 29.1 | Non Metallic Materials | 1.0D | 1.0D | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 110 | 105 | fz | 0.006 | 0.011 | 0.016 | 0.024 | 0.029 | 0.038 | 0.048 | 0.063 | 0.081 | 0.096 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | FEED | 611 | 887 | 1070 | 1070 | 1015 | 1016 | 1070 | 1103 | 1083 | 1070 | | |
| | | | | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 110 | 105 | fz | 0.006 | 0.011 | 0.016 | 0.024 | 0.029 | 0.038 | 0.048 | 0.063 | 0.081 | 0.096 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | FEED | 611 | 887 | 1070 | 1070 | 1015 | 1016 | 1070 | 1103 | 1083 | 1070 | | |
| H | 40 | Chilled Cast Iron | 1.0D | 1.0D | Vc | 30 | 35 | 40 | 45 | 50 | 55 | 55 | 55 | 55 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.019 | 0.024 | 0.031 | 0.038 | 0.038 | 0.037 | RPM | 9549 | 7427 | 6366 | 4775 | 3979 | 3183 | 2918 | 2188 | 1751 | 1459 | FEED | 76 | 119 | 153 | 172 | 302 | 306 | 362 | 333 | 266 | 216 | |
| | | | | | Vc | 30 | 35 | 40 | 45 | 50 | 55 | 55 | 55 | 55 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.019 | 0.024 | 0.031 | 0.038 | 0.038 | 0.037 | RPM | 9549 | 7427 | 6366 | 4775 | 3979 | 3183 | 2918 | 2188 | 1751 | 1459 | FEED | 76 | 119 | 153 | 172 | 302 | 306 | 362 | 333 | 266 | 216 | |


G9B80 SERIES

2 FLUTE - SLOTTING

| ISO | VDI 3323 | Material Description | Parameter | Mill Diameter (Ø) | | | | | | |
|-----|------------------------------------|----------------------|-------------|-------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | | | | 0.4 | 0.5 | 0.6 | 0.7 | 0.8 | 0.9 | 1.0 |
| P | 1-4 | Non-alloy steel | Vc | 33~43 | 42~53 | 50~64 | 58~75 | 58~75 | 61~76 | 60~75 |
| | | | fz | 0.003~0.005 | 0.003~0.005 | 0.004~0.007 | 0.004~0.007 | 0.005~0.009 | 0.006~0.011 | 0.006~0.014 |
| | | | RPM | 26500~34000 | 26500~34000 | 26500~34000 | 26500~34000 | 23000~30000 | 21500~27000 | 19000~24000 |
| | | | FEED | 170~370 | 170~370 | 210~485 | 210~485 | 240~535 | 240~610 | 240~690 |
| | | | Ap | 0.007~0.018 | 0.009~0.022 | 0.011~0.026 | 0.012~0.031 | 0.014~0.035 | 0.030~0.060 | 0.045~0.090 |
| | | | Vc | 24~30 | 30~38 | 36~45 | 42~53 | 41~53 | 42~54 | 42~53 |
| | 5 | Non-alloy steel | fz | 0.002~0.006 | 0.002~0.006 | 0.003~0.008 | 0.003~0.008 | 0.003~0.010 | 0.005~0.012 | 0.006~0.015 |
| | | | RPM | 19000~24000 | 19000~24000 | 19000~24000 | 19000~24000 | 16500~21000 | 15000~19000 | 13500~17000 |
| | | | FEED | 72~290 | 72~290 | 95~365 | 95~365 | 100~410 | 135~460 | 160~510 |
| | | | Ap | 0.007~0.018 | 0.009~0.022 | 0.011~0.026 | 0.012~0.031 | 0.014~0.035 | 0.030~0.060 | 0.045~0.090 |
| | | | Vc | 33~43 | 42~53 | 50~64 | 58~75 | 58~75 | 61~76 | 60~75 |
| | | | fz | 0.003~0.005 | 0.003~0.005 | 0.004~0.007 | 0.004~0.007 | 0.005~0.009 | 0.006~0.011 | 0.006~0.014 |
| | 6-7 | Low alloy steel | RPM | 26500~34000 | 26500~34000 | 26500~34000 | 26500~34000 | 23000~30000 | 21500~27000 | 19000~24000 |
| | | | FEED | 170~370 | 170~370 | 210~485 | 210~485 | 240~535 | 240~610 | 240~690 |
| | | | Ap | 0.007~0.018 | 0.009~0.022 | 0.011~0.026 | 0.012~0.031 | 0.014~0.035 | 0.030~0.060 | 0.045~0.090 |
| | | | Vc | 24~30 | 30~38 | 36~45 | 42~53 | 41~53 | 42~54 | 42~53 |
| | | | fz | 0.002~0.006 | 0.002~0.006 | 0.003~0.008 | 0.003~0.008 | 0.003~0.010 | 0.005~0.012 | 0.006~0.015 |
| | | | RPM | 19000~24000 | 19000~24000 | 19000~24000 | 19000~24000 | 16500~21000 | 15000~19000 | 13500~17000 |
| 8-9 | Low alloy steel | FEED | 72~290 | 72~290 | 95~365 | 95~365 | 100~410 | 135~460 | 160~510 | |
| | | Ap | 0.007~0.018 | 0.009~0.022 | 0.011~0.026 | 0.012~0.031 | 0.014~0.035 | 0.030~0.060 | 0.045~0.090 | |
| | | Vc | 33~43 | 42~53 | 50~64 | 58~75 | 58~75 | 61~76 | 60~75 | |
| | | fz | 0.003~0.005 | 0.003~0.005 | 0.004~0.007 | 0.004~0.007 | 0.005~0.009 | 0.006~0.011 | 0.006~0.014 | |
| | | RPM | 26500~34000 | 26500~34000 | 26500~34000 | 26500~34000 | 23000~30000 | 21500~27000 | 19000~24000 | |
| | | FEED | 170~370 | 170~370 | 210~485 | 210~485 | 240~535 | 240~610 | 240~690 | |
| 10 | High alloyed steel, and tool steel | Ap | 0.007~0.018 | 0.009~0.022 | 0.011~0.026 | 0.012~0.031 | 0.014~0.035 | 0.030~0.060 | 0.045~0.090 | |
| | | Vc | 24~30 | 30~38 | 36~45 | 42~53 | 41~53 | 42~54 | 42~53 | |
| | | fz | 0.002~0.006 | 0.002~0.006 | 0.003~0.008 | 0.003~0.008 | 0.003~0.010 | 0.005~0.012 | 0.006~0.015 | |
| | | RPM | 19000~24000 | 19000~24000 | 19000~24000 | 19000~24000 | 16500~21000 | 15000~19000 | 13500~17000 | |
| | | FEED | 72~290 | 72~290 | 95~365 | 95~365 | 100~410 | 135~460 | 160~510 | |
| | | Ap | 0.007~0.018 | 0.009~0.022 | 0.011~0.026 | 0.012~0.031 | 0.014~0.035 | 0.030~0.060 | 0.045~0.090 | |

※ The FEED, in long & extra long types, should be reduced by around 50%

▶ NEXT PAGE

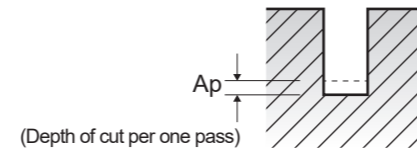


G9B80 SERIES

2 FLUTE - SLOTTING

| VDI 3323 | Material Description | Parameter | Mill Diameter (Ø) | | | | | | | | | |
|----------|------------------------------------|-----------------|-------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | | | 1.2 | 1.4 | 1.5 | 1.6 | 1.8 | 2.0 | 2.5 | 3.0 | 4.0 | |
| P | 1-4 | Non-alloy steel | Vc | 58~72 | 60~75 | 59~73 | 60~75 | 62~79 | 63~79 | 63~79 | 64~80 | 64~82 |
| | | | fz | 0.008~0.020 | 0.009~0.023 | 0.010~0.025 | 0.010~0.026 | 0.011~0.027 | 0.012~0.031 | 0.015~0.038 | 0.018~0.045 | 0.024~0.059 |
| | | | RPM | 15500~19000 | 13600~17000 | 12500~15500 | 12000~15000 | 11000~14000 | 10000~12500 | 8000~10000 | 6800~8500 | 5100~6500 |
| | | | FEED | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 |
| | | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.112~0.235 | 0.135~0.270 | 0.180~0.360 |
| | | | Vc | 41~53 | 43~53 | 42~54 | 44~55 | 44~55 | 44~56 | 45~57 | 44~57 | 44~57 |
| | 5 | Non-alloy steel | fz | 0.007~0.018 | 0.008~0.021 | 0.009~0.022 | 0.009~0.023 | 0.010~0.026 | 0.011~0.028 | 0.014~0.035 | 0.017~0.043 | 0.023~0.057 |
| | | | RPM | 11000~14000 | 9800~12000 | 8950~11500 | 8700~10900 | 7800~9800 | 7000~8950 | 5700~7200 | 4700~6000 | 3500~4500 |
| | | | FEED | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 |
| | | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.112~0.235 | 0.135~0.270 | 0.180~0.360 |
| | | | Vc | 58~72 | 60~75 | 59~73 | 60~75 | 62~79 | 63~79 | 63~79 | 64~80 | 64~82 |
| | | | fz | 0.008~0.020 | 0.009~0.023 | 0.010~0.025 | 0.010~0.026 | 0.011~0.027 | 0.012~0.031 | 0.015~0.038 | 0.018~0.045 | 0.024~0.059 |
| 6-7 | Low alloy steel | RPM | 15500~19000 | 13600~17000 | 12500~15500 | 12000~15000 | 11000~14000 | 10000~12500 | 8000~10000 | 6800~8500 | 5100~6500 | |
| | | FEED | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 | |
| | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.112~0.235 | 0.135~0.270 | 0.180~0.360 | |
| | | Vc | 41~53 | 43~53 | 42~54 | 44~55 | 44~55 | 44~56 | 45~57 | 44~57 | 44~57 | |
| | | fz | 0.007~0.018 | 0.008~0.021 | 0.009~0.022 | 0.009~0.023 | 0.010~0.026 | 0.011~0.028 | 0.014~0.035 | 0.017~0.043 | 0.023~0.057 | |
| | | RPM | 11000~14000 | 9800~12000 | 8950~11500 | 8700~10900 | 7800~9800 | 7000~8950 | 5700~7200 | 4700~6000 | 3500~4500 | |
| 8-9 | Low alloy steel | FEED | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 | |
| | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.112~0.235 | 0.135~0.270 | 0.180~0.360 | |
| | | Vc | 58~72 | 60~75 | 59~73 | 60~75 | 62~79 | 63~79 | 63~79 | 64~80 | 64~82 | |
| | | fz | 0.008~0.020 | 0.009~0.023 | 0.010~0.025 | 0.010~0.026 | 0.011~0.027 | 0.012~0.031 | 0.015~0.038 | 0.018~0.045 | 0.024~0.059 | |
| | | RPM | 15500~19000 | 13600~17000 | 12500~15500 | 12000~15000 | 11000~14000 | 10000~12500 | 8000~10000 | 6800~8500 | 5100~6500 | |
| | | FEED | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 | 240~765 | |
| 10 | High alloyed steel, and tool steel | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.112~0.235 | 0.135~0.270 | 0.180~0.360 | |
| | | Vc | 41~53 | 43~53 | 42~54 | 44~55 | 44~55 | 44~56 | 45~57 | 44~57 | 44~57 | |
| | | fz | 0.007~0.018 | 0.008~0.021 | 0.009~0.022 | 0.009~0.023 | 0.010~0.026 | 0.011~0.028 | 0.014~0.035 | 0.017~0.043 | 0.023~0.057 | |
| | | RPM | 11000~14000 | 9800~12000 | 8950~11500 | 8700~10900 | 7800~9800 | 7000~8950 | 5700~7200 | 4700~6000 | 3500~4500 | |
| | | FEED | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 | 160~510 | |
| | | Ap | 0.055~0.100 | 0.062~0.125 | 0.070~0.135 | 0.075~0.145 | 0.080~0.160 | 0.090~0.180 | 0.112~0.235 | 0.135~0.270 | 0.180~0.360 | |

※ The FEED, in long & extra long types, should be reduced by around 50%

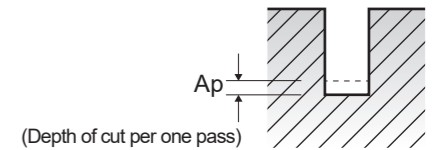

G9553, G9G46, G9410, G9425, G9G47, G9439

G9528, G9433, G9G48, G9447, G9G49 SERIES

3 FLUTE - SLOTTING

| ISO | VDI 3323 | Material Description | Ae | Ap | Parameter | Mill Diameter (Ø) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|--|------|---------------------------|-----------|-------------------|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | | | | | 1.0 | 1.5 | 2.0 | 3.0 | 4.0 | 5.0 | 6.0 | 8.0 | 10.0 | 12.0 | 14.0 | 16.0 | 20.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P | 1-4 | Non-alloy steel | 1.0D | 0.5D (Up to Ø3 : 0.2D) | Vc | 45 | 60 | 50 | 55 | 65 | 70 | 70 | 70 | 70 | 75 | 75 | 70 | fz | 0.002 | 0.003 | 0.005 | 0.007 | 0.012 | 0.015 | 0.018 | 0.027 | 0.03 | 0.031 | 0.029 | 0.029 | RPM | 14324 | 12732 | 7958 | 5836 | 5173 | 4456 | 3714 | 2785 | 2228 | 1857 | 1705 | 1492 | 1114 | FEED | 86 | 115 | 119 | 123 | 186 | 201 | 201 | 226 | 201 | 173 | 148 | 130 | 97 | | |
| | | | | | Vc | 25 | 25 | 30 | 35 | 40 | 40 | 45 | 45 | 40 | 45 | 45 | 50 | 45 | fz | 0.002 | 0.004 | 0.005 | 0.007 | 0.012 | 0.014 | 0.02 | 0.024 | 0.023 | 0.022 | 0.022 | 0.023 | 0.024 | RPM | 7958 | 5305 | 4775 | 3714 | 3183 | 2546 | 2387 | 1790 | 1273 | 1194 | 1023 | 995 | 716 | FEED | 48 | 64 | 72 | 78 | 115 | 107 | 143 | 129 | 88 | 79 | 68 | 69 | 52 |
| | 5 | Non-alloy steel | 1.0D | 0.5D (Up to Ø3 : 0.2D) | Vc | 45 | 60 | 50 | 55 | 65 | 70 | 70 | 70 | 70 | 75 | 75 | 70 | fz | 0.002 | 0.003 | 0.005 | 0.007 | 0.012 | 0.015 | 0.018 | 0.027 | 0.03 | 0.031 | 0.029 | 0.029 | RPM | 14324 | 12732 | 7958 | 5836 | 5173 | 4456 | 3714 | 2785 | 2228 | 1857 | 1705 | 1492 | 1114 | FEED | 86 | 115 | 119 | 123 | 186 | 201 | 201 | 226 | 201 | 173 | 148 | 130 | 97 | | |
| | | | | | Vc | 25 | 25 | 30 | 35 | 40 | 40 | 45 | 45 | 40 | 45 | 45 | 50 | 45 | fz | 0.002 | 0.004 | 0.005 | 0.007 | 0.012 | 0.014 | 0.02 | 0.024 | 0.023 | 0.022 | 0.022 | 0.023 | 0.024 | RPM | 7958 | 5305 | 4775 | 3714 | 3183 | 2546 | 2387 | 1790 | 1273 | 1194 | 1023 | 995 | 716 | FEED | 48 | 64 | 72 | 78 | 115 | 107 | 143 | 129 | 88 | 79 | 68 | 69 | 52 |
| | 6-7 | Low alloy steel | 1.0D | 0.5D (Up to Ø3 : 0.2D) | Vc | 45 | 60 | 50 | 55 | 65 | 70 | 70 | 70 | 70 | 75 | 75 | 70 | fz | 0.002 | 0.003 | 0.005 | 0.007 | 0.012 | 0.015 | 0.018 | 0.027 | 0.03 | 0.031 | 0.029 | 0.029 | RPM | 14324 | 12732 | 7958 | 5836 | 5173 | 4456 | 3714 | 2785 | 2228 | 1857 | 1705 | 1492 | 1114 | FEED | 86 | 115 | 119 | 123 | 186 | 201 | 201 | 226 | 201 | 173 | 148 | 130 | 97 | | |
| | | | | | Vc | 25 | 25 | 30 | 35 | 40 | 40 | 45 | 45 | 40 | 45 | 45 | 50 | 45 | fz | 0.002 | 0.004 | 0.005 | 0.007 | 0.012 | 0.014 | 0.02 | 0.024 | 0.023 | 0.022 | 0.022 | 0.023 | 0.024 | RPM | 7958 | 5305 | 4775 | 3714 | 3183 | 2546 | 2387 | 1790 | 1273 | 1194 | 1023 | 995 | 716 | FEED | 48 | 64 | 72 | 78 | 115 | 107 | 143 | 129 | 88 | 79 | 68 | 69 | 52 |
| | 8-9 | Low alloy steel | 1.0D | 0.5D (Up to Ø3 : 0.2D) | Vc | 45 | 60 | 50 | 55 | 65 | 70 | 70 | 70 | 70 | 75 | 75 | 70 | fz | 0.002 | 0.003 | 0.005 | 0.007 | 0.012 | 0.015 | 0.018 | 0.027 | 0.03 | 0.031 | 0.029 | 0.029 | RPM | 14324 | 12732 | 7958 | 5836 | 5173 | 4456 | 3714 | 2785 | 2228 | 1857 | 1705 | 1492 | 1114 | FEED | 86 | 115 | 119 | 123 | 186 | 201 | 201 | 226 | 201 | 173 | 148 | 130 | 97 | | |
| | | | | | Vc | 25 | 25 | 30 | 35 | 40 | 40 | 45 | 45 | 40 | 45 | 45 | 50 | 45 | fz | 0.002 | 0.004 | 0.005 | 0.007 | 0.012 | 0.014 | 0.02 | 0.024 | 0.023 | 0.022 | 0.022 | 0.023 | 0.024 | RPM | 7958 | 5305 | 4775 | 3714 | 3183 | 2546 | 2387 | 1790 | 1273 | 1194 | 1023 | 995 | 716 | FEED | 48 | 64 | 72 | 78 | 115 | 107 | 143 | 129 | 88 | 79 | 68 | 69 | 52 |
| | 10 | High alloyed steel, and tool steel | 1.0D | 0.5D (Up to Ø3 : 0.2D) | Vc | 45 | 60 | 50 | 55 | 65 | 70 | 70 | 70 | 70 | 75 | 75 | 70 | fz | 0.002 | 0.003 | 0.005 | 0.007 | 0.012 | 0.015 | 0.018 | 0.027 | 0.03 | 0.031 | 0.029 | 0.029 | RPM | 14324 | 12732 | 7958 | 5836 | 5173 | 4456 | 3714 | 2785 | 2228 | 1857 | 1705 | 1492 | 1114 | FEED | 86 | 115 | 119 | 123 | 186 | 201 | 201 | 226 | 201 | 173 | 148 | 130 | 97 | | |
| | | | | | Vc | 25 | 25 | 30 | 35 | 40 | 40 | 45 | 45 | 40 | 45 | 45 | 50 | 45 | fz | 0.002 | 0.004 | 0.005 | 0.007 | 0.012 | 0.014 | 0.02 | 0.024 | 0.023 | 0.022 | 0.022 | 0.023 | 0.024 | RPM | 7958 | 5305 | 4775 | 3714 | 3183 | 2546 | 2387 | 1790 | 1273 | 1194 | 1023 | 995 | 716 | FEED | 48 | 64 | 72 | 78 | 115 | 107 | 143 | 129 | 88 | 79 | 68 | 69 | 52 |
| | 11.1 - 11.2 | High alloyed steel, and tool steel | 1.0D | 0.5D (Up to Ø3 : 0.2D) | Vc | 25 | 25 | 30 | 35 | 40 | 40 | 45 | 45 | 40 | 45 | 45 | 50 | 45 | fz | 0.002 | 0.004 | 0.005 | 0.007 | 0.012 | 0.014 | 0.02 | 0.024 | 0.023 | 0.022 | 0.022 | 0.023 | 0.024 | RPM | 7958 | 5305 | 4775 | 3714 | 3183 | 2546 | 2387 | 1790 | 1273 | 1194 | 1023 | 995 | 716 | FEED | 48 | 64 | 72 | 78 | 115 | 107 | 143 | 129 | 88 | 79 | 68 | 69 | 52 |
| | | | | | Vc | 20 | 25 | 25 | 30 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | fz | 0.002 | 0.003 | 0.004 | 0.007 | 0.011 | 0.015 | 0.019 | 0.025 | 0.028 | 0.026 | 0.027 | 0.031 | 0.03 | RPM | 6366 | 5305 | 3979 | 3183 | 2785 | 2228 | 1857 | 1393 | 1114 | 928 | 796 | 696 | 557 | FEED | 38 | 48 | 48 | 67 | 92 | 100 | 106 | 104 | 94 | 72 | 64 | 65 |
| M | 14.1 | Stainless steel | 1.0D | 0.5D (Up to Ø3 : 0.2D) | Vc | 20 | 25 | 25 | 30 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | fz | 0.002 | 0.003 | 0.004 | 0.007 | 0.011 | 0.015 | 0.019 | 0.025 | 0.028 | 0.026 | 0.027 | 0.031 | 0.03 | RPM | 6366 | 5305 | 3979 | 3183 | 2785 | 2228 | 1857 | 1393 | 1114 | 928 | 796 | 696 | 557 | FEED | 38 | 48 | 48 | 67 | 92 | 100 | 106 | 104 | 94 | 72 | 64 | 65 | 50 | | |
| K | 15-20 | Grey cast iron Nodular cast iron Malleable cast iron | 1.0D | 1.0D | Vc | 60 | 55 | 60 | 55 | 60 | 55 | 55 | 60 | 55 | 55 | 55 | 55 | fz | 0.003 | 0.005 | 0.007 | 0.011 | 0.013 | 0.018 | 0.026 | 0.036 | 0.046 | 0.063 | 0.073 | 0.086 | 0.115 | RPM | 19099 | 11671 | 9549 | 5836 | 4775 | 3501 | 2918 | 2188 | 1910 | 1459 | 1251 | 1094 | 875 | FEED | 172 | 175 | 201 | 193 | 186 | 189 | 228 | 236 | 264 | 276 | 274 | 282 | 302 | |
| | | | | | Vc | 140 | 130 | 140 | 145 | 140 | 145 | 145 | 145 | 145 | 140 | 145 | 145 | 140 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.013 | 0.015 | 0.019 | 0.026 | 0.032 | 0.038 | 0.043 | 0.05 | 0.065 | RPM | 44563 | 27587 | 22282 | 15385 | 11141 | 9231 | 7692 | 5769 | 4615 | 3714 | 3297 | 2885 | 2228 | FEED | 267 | 331 | 401 | 415 | 434 | 415 | 438 | 450 | 443 | 423 | 425 | 433 | 434 |
| | | | | | Vc | 140 | 130 | 140 | 145 | 140 | 145 | 145 | 145 | 145 | 140 | 145 | 145 | 140 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.013 | 0.015 | 0.019 | 0.026 | 0.032 | 0.038 | 0.043 | 0.05 | 0.065 | RPM | 44563 | 27587 | 22282 | 15385 | 11141 | 9231 | 7692 | 5769 | 4615 | 3714 | 3297 | 2885 | 2228 | FEED | 267 | 331 | 401 | 415 | 434 | 415 | 438 | 450 | 443 | 423 | 425 | 433 | 434 |
| N | 21~22 | Aluminum-wrought alloy | 1.0D | 1.0D | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 105 | 105 | 105 | 110 | 105 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.012 | 0.015 | 0.02 | 0.025 | 0.032 | 0.039 | 0.046 | 0.05 | 0.065 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | 2387 | 2188 | 1671 | FEED | 153 | 242 | 301 | 301 | 315 | 301 | 334 | 328 | 321 | 326 | 329 | 328 | 326 | |
| | | | | | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 105 | 105 | 105 | 105 | 110 | 105 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.012 | 0.015 | 0.02 | 0.025 | 0.032 | 0.039 | 0.046 | 0.05 | 0.065 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | 2387 | 2188 | 1671 | FEED | 153 | 242 | 301 | 301 | 315 | 301 | 334 | 328 | 321 | 326 | 329 | 328 | 326 |
| | 23~25 | Aluminum-cast, alloyed | 1.0D | 1.0D | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 105 | 105 | 105 | 110 | 105 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.012 | 0.015 | 0.02 | 0.025 | 0.032 | 0.039 | 0.046 | 0.05 | 0.065 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | 2387 | 2188 | 1671 | FEED | 153 | 242 | 301 | 301 | 315 | 301 | 334 | 328 | 321 | 326 | 329 | 328 | 326 | |
| | | | | | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 105 | 105 | 105 | 105 | 110 | 105 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.012 | 0.015 | 0.02 | 0.025 | 0.032 | 0.039 | 0.046 | 0.05 | 0.065 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | 2387 | 2188 | 1671 | FEED | 153 | 242 | 301 | 301 | 315 | 301 | 334 | 328 | 321 | 326 | 329 | 328 | 326 |
| 26-28 | Copper and Copper Alloys (Bronze / Brass) | 1.0D | 1.0D | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 105 | 105 | 105 | 110 | 105 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.012 | 0.015 | 0.02 | 0.025 | 0.032 | 0.039 | 0.046 | 0.05 | 0.065 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | 2387 | 2188 | 1671 | FEED | 153 | 242 | 301 | 301 | 315 | 301 | 334 | 328 | 321 | 326 | 329 | 328 | 326 | | |
| | | | | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 105 | 105 | 105 | 105 | 110 | 105 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.012 | 0.015 | 0.02 | 0.025 | 0.032 | 0.039 | 0.046 | 0.05 | 0.065 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | 2387 | 2188 | 1671 | FEED | 153 | 242 | 301 | 301 | 315 | 301 | 334 | 328 | 321 | 326 | 329 | 328 | 326 | |
| 29.1 | Non Metallic Materials | 1.0D | 1.0D | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 105 | 105 | 105 | 110 | 105 | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.012 | 0.015 | 0.02 | 0.025 | 0.032 | 0.039 | 0.046 | 0.05 | 0.065 | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | 2387 | 2188 | 1671 | FEED | 153 | 242 | 301 | 301 | 315 | 301 | 334 | 328 | 321 | 326 | 329 | 328 | 326 | | |
| | | | | Vc | 25 | 25 | 30 | 35 | 40 | 40 | 45 | 45 | 40 | 45 | 45 | 50 | 45 | fz | 0.002 | 0.004 | 0.005 | 0.007 | 0.012 | 0.014 | 0.02 | 0.024 | 0.023 | 0.022 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


G9432, G9G50, G9A69, G9448, G9540, G9449, G9G51, G9453 SERIES

4 FLUTE - SIDE CUTTING

Vc = m/min.
 fz = mm/tooth
 RPM = rev./min.
 FEED = mm/min.

| ISO | VDI 3323 | Material Description | Ae | Ap | Parameter | Mill Diameter (Ø) | | | | | | | | | | | | | | | |
|-----------|------------------------|--|-------|-------|-----------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|--|
| | | | | | | 1.0 | 1.5 | 2.0 | 3.0 | 4.0 | 5.0 | 6.0 | 8.0 | 10.0 | 12.0 | 14.0 | 16.0 | 20.0 | | | |
| P | 1-4 | Non-alloy steel | 0.1D | 1.0D | Vc | 55 | 55 | 60 | 70 | 80 | 85 | 90 | 90 | 85 | 90 | 90 | 95 | 90 | | | |
| | | | | | fz | 0.002 | 0.005 | 0.006 | 0.009 | 0.019 | 0.024 | 0.029 | 0.043 | 0.047 | 0.047 | 0.047 | 0.047 | 0.047 | 0.047 | | |
| | RPM | 17507 | 11671 | 9549 | 7427 | 6366 | 5411 | 4775 | 3581 | 2706 | 2387 | 2046 | 1890 | 1432 | | | | | | | |
| | FEED | 140 | 233 | 229 | 267 | 484 | 519 | 554 | 616 | 509 | 449 | 385 | 355 | 269 | | | | | | | |
| | 5 | 0.1D | 1.0D | Vc | 30 | 35 | 40 | 45 | 50 | 50 | 55 | 55 | 55 | 55 | 60 | 55 | | | | | |
| | | | | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.019 | 0.024 | 0.031 | 0.038 | 0.038 | 0.037 | 0.038 | 0.037 | 0.038 | | | | |
| | RPM | 9549 | 7427 | 6366 | 4775 | 3979 | 3183 | 2918 | 2188 | 1751 | 1459 | 1251 | 1194 | 875 | | | | | | | |
| | FEED | 76 | 119 | 153 | 172 | 302 | 306 | 362 | 333 | 266 | 216 | 190 | 177 | 133 | | | | | | | |
| | 6-7 | 0.1D | 1.0D | Vc | 55 | 55 | 60 | 70 | 80 | 85 | 90 | 90 | 85 | 90 | 90 | 95 | 90 | | | | |
| | | | | fz | 0.002 | 0.005 | 0.006 | 0.009 | 0.019 | 0.024 | 0.029 | 0.043 | 0.047 | 0.047 | 0.047 | 0.047 | 0.047 | | | | |
| | RPM | 17507 | 11671 | 9549 | 7427 | 6366 | 5411 | 4775 | 3581 | 2706 | 2387 | 2046 | 1890 | 1432 | | | | | | | |
| | FEED | 140 | 233 | 229 | 267 | 484 | 519 | 554 | 616 | 509 | 449 | 385 | 355 | 269 | | | | | | | |
| 8-9 | 0.1D | 1.0D | Vc | 30 | 35 | 40 | 45 | 50 | 50 | 55 | 55 | 55 | 55 | 60 | 55 | | | | | | |
| | | | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.019 | 0.024 | 0.031 | 0.038 | 0.038 | 0.037 | 0.038 | 0.037 | 0.038 | | | | | |
| RPM | 9549 | 7427 | 6366 | 4775 | 3979 | 3183 | 2918 | 2188 | 1751 | 1459 | 1251 | 1194 | 875 | | | | | | | | |
| FEED | 76 | 119 | 153 | 172 | 302 | 306 | 362 | 333 | 266 | 216 | 190 | 177 | 133 | | | | | | | | |
| 10 | 0.1D | 1.0D | Vc | 55 | 55 | 60 | 70 | 80 | 85 | 90 | 90 | 85 | 90 | 90 | 95 | 90 | | | | | |
| | | | fz | 0.002 | 0.005 | 0.006 | 0.009 | 0.019 | 0.024 | 0.029 | 0.043 | 0.047 | 0.047 | 0.047 | 0.047 | 0.047 | | | | | |
| RPM | 17507 | 11671 | 9549 | 7427 | 6366 | 5411 | 4775 | 3581 | 2706 | 2387 | 2046 | 1890 | 1432 | | | | | | | | |
| FEED | 140 | 233 | 229 | 267 | 484 | 519 | 554 | 616 | 509 | 449 | 385 | 355 | 269 | | | | | | | | |
| 11.1-11.2 | 0.1D | 1.0D | Vc | 30 | 35 | 40 | 45 | 50 | 50 | 55 | 55 | 55 | 55 | 60 | 55 | | | | | | |
| | | | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.019 | 0.024 | 0.031 | 0.038 | 0.038 | 0.037 | 0.038 | 0.037 | 0.038 | | | | | |
| RPM | 9549 | 7427 | 6366 | 4775 | 3979 | 3183 | 2918 | 2188 | 1751 | 1459 | 1251 | 1194 | 875 | | | | | | | | |
| FEED | 76 | 119 | 153 | 172 | 302 | 306 | 362 | 333 | 266 | 216 | 190 | 177 | 133 | | | | | | | | |
| M | 14.1 | Stainless steel | 0.1D | 1.0D | Vc | 25 | 35 | 35 | 35 | 40 | 40 | 45 | 45 | 45 | 45 | 50 | | | | | |
| fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.018 | 0.024 | 0.029 | 0.042 | 0.044 | 0.045 | 0.045 | 0.045 | 0.045 | 0.046 | | | | | | | |
| RPM | 7958 | 7427 | 5570 | 3714 | 3183 | 2546 | 2387 | 1790 | 1432 | 1194 | 1023 | 995 | 716 | | | | | | | | |
| FEED | 64 | 119 | 134 | 134 | 229 | 244 | 277 | 301 | 252 | 215 | 184 | 177 | 132 | | | | | | | | |
| K | 15-20 | Grey cast iron Nodular cast iron Malleable cast iron | 0.1D | 1.5D | Vc | 60 | 55 | 60 | 55 | 60 | 55 | 55 | 60 | 55 | 55 | 55 | | | | | |
| fz | 0.008 | 0.013 | 0.017 | 0.026 | 0.035 | 0.044 | 0.065 | 0.093 | 0.116 | 0.155 | 0.182 | 0.22 | 0.288 | | | | | | | | |
| RPM | 19099 | 11671 | 9549 | 5836 | 4775 | 3501 | 2918 | 2188 | 1910 | 1459 | 1251 | 1094 | 875 | | | | | | | | |
| FEED | 611 | 607 | 649 | 607 | 668 | 616 | 759 | 814 | 886 | 905 | 910 | 963 | 1008 | | | | | | | | |
| N | 21~22 | Aluminum-wrought alloy | 0.1D | 1.5D | Vc | 140 | 130 | 140 | 145 | 140 | 145 | 145 | 145 | 140 | 145 | 145 | 140 | | | | |
| | | | | | fz | 0.006 | 0.011 | 0.015 | 0.021 | 0.03 | 0.036 | 0.047 | 0.063 | 0.078 | 0.095 | 0.108 | 0.125 | 0.163 | | | |
| | RPM | 44563 | 27587 | 22282 | 15385 | 11141 | 9231 | 7692 | 5769 | 4615 | 3714 | 3297 | 2885 | 2228 | | | | | | | |
| | FEED | 1070 | 1214 | 1337 | 1292 | 1337 | 1329 | 1446 | 1454 | 1440 | 1411 | 1424 | 1442 | 1453 | | | | | | | |
| | 23~25 | Aluminum-cast, alloyed | 0.1D | 1.5D | Vc | 140 | 130 | 140 | 145 | 140 | 145 | 145 | 145 | 140 | 145 | 145 | 140 | | | | |
| | | | | | fz | 0.006 | 0.011 | 0.015 | 0.021 | 0.03 | 0.036 | 0.047 | 0.063 | 0.078 | 0.095 | 0.108 | 0.125 | 0.163 | | | |
| | RPM | 44563 | 27587 | 22282 | 15385 | 11141 | 9231 | 7692 | 5769 | 4615 | 3714 | 3297 | 2885 | 2228 | | | | | | | |
| | FEED | 1070 | 1214 | 1337 | 1292 | 1337 | 1329 | 1446 | 1454 | 1440 | 1411 | 1424 | 1442 | 1453 | | | | | | | |
| | 26-28 | Copper and Copper Alloys (Bronze / Brass) | 0.1D | 1.5D | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 110 | 105 | 110 | 105 | | | | | |
| | | | | | fz | 0.006 | 0.011 | 0.016 | 0.024 | 0.029 | 0.038 | 0.048 | 0.063 | 0.081 | 0.096 | 0.115 | 0.125 | 0.162 | | | |
| | RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | 2387 | 2188 | 1671 | | | | | | | |
| | FEED | 611 | 887 | 1070 | 1070 | 1015 | 1016 | 1070 | 1103 | 1083 | 1070 | 1098 | 1094 | 1083 | | | | | | | |
| 29.1 | Non Metallic Materials | 0.1D | 1.5D | Vc | 80 | 95 | 105 | 105 | 110 | 105 | 105 | 110 | 105 | 110 | 105 | | | | | | |
| | | | | fz | 0.006 | 0.011 | 0.016 | 0.024 | 0.029 | 0.038 | 0.048 | 0.063 | 0.081 | 0.096 | 0.115 | 0.125 | 0.162 | | | | |
| RPM | 25465 | 20160 | 16711 | 11141 | 8754 | 6685 | 5570 | 4377 | 3342 | 2785 | 2387 | 2188 | 1671 | | | | | | | | |
| FEED | 611 | 887 | 1070 | 1070 | 1015 | 1016 | 1070 | 1103 | 1083 | 1070 | 1098 | 1094 | 1083 | | | | | | | | |
| H | 40 | Chilled Cast Iron | 0.1D | 1.0D | Vc | 30 | 35 | 40 | 45 | 50 | 50 | 55 | 55 | 55 | 60 | 55 | | | | | |
| | | | | | fz | 0.002 | 0.004 | 0.006 | 0.009 | 0.019 | 0.024 | 0.031 | 0.038 | 0.038 | 0.037 | 0.038 | 0.037 | 0.038 | | | |
| RPM | 9549 | 7427 | 6366 | 4775 | 3979 | 3183 | 2918 | 2188 | 1751 | 1459 | 1251 | 1194 | 875 | | | | | | | | |
| FEED | 76 | 119 | 153 | 172 | 302 | 306 | 362 | 333 | 266 | 216 | 190 | 177 | 133 | | | | | | | | |

※ The FEED, in long & extra long types, should be reduced by around 50%



G9F45, G9F46 SERIES

4&6 FLUTE - SIDE CUTTING

Vc = m/min.
 fz = mm/tooth
 RPM = rev./min.
 FEED = mm/min.

| ISO | VDI 3323 | Material Description | Ae | Ap | Parameter | Mill Diameter (Ø) | | | | | | | | | | | | | | | |
|-----------|-----------|--|-------|-------|-----------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|
| | | | | | | 3.0 | 4.0 | 5.0 | 6.0 | 8.0 | 10.0 | 12.0 | 14.0 | 16.0 | 18.0 | 20.0 | | | | | |
| P | 1-4 | Non-alloy steel | 0.05D | 1.5D | Vc | 82 | 83 | 98 | 98 | 97 | 97 | 99 | 98 | 98 | 97 | 97 | | | | | |
| | | | | | fz | 0.024 | 0.033 | 0.025 | 0.03 | 0.045 | 0.045 | 0.053 | 0.058 | 0.062 | 0.065 | 0.069 | | | | | |
| | RPM | 8700 | 6605 | 6239 | 5199 | 3860 | 3088 | 2626 | 2228 | 1950 | 1715 | 1544 | | | | | | | | | |
| | FEED | 835 | 872 | 936 | 936 | 1042 | 834 | 835 | 775 | 725 | 669 | 639 | | | | | | | | | |
| | 5 | 0.03D | 1.5D | Vc | 54 | 55 | 65 | 65 | 65 | 64 | 66 | 66 | 65 | 65 | 64 | | | | | | |
| | | | | fz | 0.024 | 0.033 | 0.027 | 0.03 | 0.038 | 0.045 | 0.053 | 0.057 | 0.062 | 0.066 | 0.07 | | | | | | |
| | RPM | 5730 | 4377 | 4138 | 3448 | 2586 | 2037 | 1751 | 1501 | 1293 | 1149 | 1019 | | | | | | | | | |
| | FEED | 550 | 578 | 670 | 621 | 590 | 550 | 557 | 513 | 481 | 455 | 428 | | | | | | | | | |
| | 6-7 | 0.05D | 1.5D | Vc | 82 | 83 | 98 | 98 | 97 | 97 | 99 | 98 | 98 | 97 | 97 | | | | | | |
| | | | | fz | 0.024 | 0.033 | 0.025 | 0.03 | 0.045 | 0.045 | 0.053 | 0.058 | 0.062 | 0.065 | 0.069 | | | | | | |
| | RPM | 8700 | 6605 | 6239 | 5199 | 3860 | 3088 | 2626 | 2228 | 1950 | 1715 | 1544 | | | | | | | | | |
| | FEED | 835 | 872 | 936 | 936 | 1042 | 834 | 835 | 775 | 725 | 669 | 639 | | | | | | | | | |
| 8-9 | 0.03D | 1.5D | Vc | 54 | 55 | 65 | 65 | 65 | 64 | 66 | 66 | 65 | 65 | 64 | | | | | | | |
| | | | fz | 0.024 | 0.033 | 0.027 | 0.03 | 0.038 | 0.045 | 0.053 | 0.057 | 0.062 | 0.066 | 0.07 | | | | | | | |
| RPM | 5730 | 4377 | 4138 | 3448 | 2586 | 2037 | 1751 | 1501 | 1293 | 1149 | 1019 | | | | | | | | | | |
| FEED | 550 | 578 | 670 | 621 | 590 | 550 | 557 | 513 | 481 | 455 | 428 | | | | | | | | | | |
| 10 | 0.05D | 1.5D | Vc | 82 | 83 | 98 | 98 | 97 | 97 | 99 | 98 | 98 | 97 | 97 | | | | | | | |
| | | | fz | 0.024 | 0.033 | 0.025 | 0.03 | 0.045 | 0.045 | 0.053 | 0.058 | 0.062 | 0.065 | 0.069 | | | | | | | |
| RPM | 8700 | 6605 | 6239 | 5199 | 3860 | 3088 | 2626 | 2228 | 1950 | 1715 | 1544 | | | | | | | | | | |
| FEED | 835 | 872 | 936 | 936 | 1042 | 834 | 835 | 775 | 725 | 669 | 639 | | | | | | | | | | |
| 11.1-11.2 | 0.03D | 1.5D | Vc | 54 | 55 | 65 | 65 | 65 | 64 | 66 | 66 | 65 | 65 | 64 | | | | | | | |
| | | | fz | 0.024 | 0.033 | 0.027 | 0.03 | 0.038 | 0.045 | 0.053 | 0.057 | 0.062 | 0.066 | 0.07 | | | | | | | |
| RPM | 5730 | 4377 | 4138 | 3448 | 2586 | 2037 | 1751 | 1501 | 1293 | 1149 | 1019 | | | | | | | | | | |
| FEED | 550 | 578 | 670 | 621 | 590 | 550 | 557 | 513 | 481 | 455 | 428 | | | | | | | | | | |
| K | 15-20 | Grey cast iron Nodular cast iron Malleable cast iron | 0.05D | 1.5D | Vc | 82 | 83 | 98 | 98 | 97 | 97 | 99 | 98 | 98 | 97 | 97 | | | | | |
| fz | 0.024 | 0.033 | 0.025 | 0.03 | 0.045 | 0.045 | 0.053 | 0.058 | 0.062 | 0.065 | 0.069 | | | | | | | | | | |
| RPM | 8700 | 6605 | 6239 | 5199 | 3860 | 3088 | 2626 | 2228 | 1950 | 1715 | 1544 | | | | | | | | | | |
| FEED | 835 | 872 | 936 | 936 | 1042 | 834 | 835 | 775 | 725 | 669 | 639 | | | | | | | | | | |
| H | 38.1 | Hardened steel | 0.03D | 1.5D | Vc | 54 | 55 | 65 | 65 | 65 | 64 | 66 | 66 | 65 | 65 | 64 | | | | | |
| | | | | | fz | 0.024 | 0.033 | 0.027 | 0.03 | 0.038 | 0.045 | 0.053 | 0.057 | 0.062 | 0.066 | 0.07 | | | | | |
| | RPM | 5730 | 4377 | 4138 | 3448 | 2586 | 2037 | 1751 | 1501 | 1293 | 1149 | 1019 | | | | | | | | | |
| | FEED | 550 | 578 | 670 | 621 | 590 | 550 | 557 | 513 | 481 | 455 | 428 | | | | | | | | | |
| | 38.2-39.1 | | | | | | | | | | | | | | | | | | | | |


G9A42 SERIES

MULTI FLUTE ROUGHING - SIDE CUTTING

| ISO | VDI 3323 | Material Description | Ae | Ap | Parameter | Mill Diameter (Ø) | | | | | | | | | | |
|-------------|------------------------------------|----------------------|------|------------------------------------|-----------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | | | 6.0 | 8.0 | 10.0 | 12.0 | 14.0 | 16.0 | 18.0 | 20.0 | 25.0 | | |
| P | 1-4 | Non-alloy steel | 0.3D | 1.5D | Vc | 250 | 250 | 245 | 255 | 255 | 255 | 250 | 260 | 285 | | |
| | | | | | fz | 0.05 | 0.067 | 0.063 | 0.075 | 0.088 | 0.1 | 0.112 | 0.112 | 0.1 | | |
| | RPM | | | | 13263 | 9947 | 7799 | 6764 | 5798 | 5073 | 4421 | 4138 | 3629 | | | |
| | FEED | | | | 1989 | 1999 | 1965 | 2029 | 2041 | 2029 | 1981 | 1854 | 1814 | | | |
| | Vc | | | | 200 | 195 | 205 | 190 | 195 | 205 | 210 | 190 | 210 | | | |
| | fz | | | | 0.022 | 0.023 | 0.028 | 0.033 | 0.04 | 0.04 | 0.041 | 0.039 | 0.039 | | | |
| | 5 | Low alloy steel | 0.3D | 1.5D | RPM | 10610 | 7759 | 6525 | 5040 | 4434 | 4078 | 3714 | 3024 | 2674 | | |
| | | | | | FEED | 700 | 535 | 731 | 665 | 709 | 653 | 609 | 472 | 521 | | |
| | Vc | | | | 250 | 250 | 245 | 255 | 255 | 255 | 250 | 260 | 285 | | | |
| | fz | | | | 0.05 | 0.067 | 0.063 | 0.075 | 0.088 | 0.1 | 0.112 | 0.112 | 0.1 | | | |
| | RPM | | | | 13263 | 9947 | 7799 | 6764 | 5798 | 5073 | 4421 | 4138 | 3629 | | | |
| | FEED | | | | 1989 | 1999 | 1965 | 2029 | 2041 | 2029 | 1981 | 1854 | 1814 | | | |
| 6-7 | High alloyed steel, and tool steel | 0.3D | 1.5D | Vc | 200 | 195 | 205 | 190 | 195 | 205 | 210 | 190 | 210 | | | |
| | | | | fz | 0.022 | 0.023 | 0.028 | 0.033 | 0.04 | 0.04 | 0.041 | 0.039 | 0.039 | | | |
| RPM | | | | 10610 | 7759 | 6525 | 5040 | 4434 | 4078 | 3714 | 3024 | 2674 | | | | |
| FEED | | | | 700 | 535 | 731 | 665 | 709 | 653 | 609 | 472 | 521 | | | | |
| 8-9 | | | | High alloyed steel, and tool steel | 0.3D | 1.5D | Vc | 250 | 250 | 245 | 255 | 255 | 255 | 250 | 260 | 285 |
| | | | | | | | fz | 0.05 | 0.067 | 0.063 | 0.075 | 0.088 | 0.1 | 0.112 | 0.112 | 0.1 |
| RPM | 13263 | 9947 | 7799 | | | | 6764 | 5798 | 5073 | 4421 | 4138 | 3629 | | | | |
| FEED | 1989 | 1999 | 1965 | | | | 2029 | 2041 | 2029 | 1981 | 1854 | 1814 | | | | |
| 10 | High alloyed steel, and tool steel | 0.3D | 1.5D | | | | Vc | 200 | 195 | 205 | 190 | 195 | 205 | 210 | 190 | 210 |
| | | | | | | | fz | 0.022 | 0.023 | 0.028 | 0.033 | 0.04 | 0.04 | 0.041 | 0.039 | 0.039 |
| RPM | | | | 10610 | 7759 | 6525 | 5040 | 4434 | 4078 | 3714 | 3024 | 2674 | | | | |
| FEED | | | | 700 | 535 | 731 | 665 | 709 | 653 | 609 | 472 | 521 | | | | |
| 11.1 - 11.2 | | | | High alloyed steel, and tool steel | 0.3D | 1.5D | Vc | 135 | 135 | 135 | 135 | 135 | 140 | 130 | 130 | 145 |
| | | | | | | | fz | 0.022 | 0.022 | 0.028 | 0.034 | 0.039 | 0.038 | 0.039 | 0.038 | 0.038 |
| RPM | 7162 | 5371 | 4297 | | | | 3581 | 3069 | 2785 | 2299 | 2069 | 1846 | | | | |
| FEED | 473 | 355 | 481 | | | | 487 | 479 | 423 | 359 | 314 | 351 | | | | |
| M 14.1 | Stainless steel | 0.05D | 1.0D | | | | Vc | 40 | 40 | 35 | 40 | 35 | 35 | 35 | 35 | 40 |
| | | | | | | | fz | 0.026 | 0.024 | 0.036 | 0.04 | 0.037 | 0.032 | 0.038 | 0.041 | 0.06 |
| RPM | | | | 2122 | 1592 | 1114 | 1061 | 796 | 696 | 619 | 557 | 509 | | | | |
| FEED | | | | 166 | 115 | 160 | 170 | 118 | 89 | 94 | 91 | 153 | | | | |
| S 31-35 | | | | Heat Resistant Super Alloys | 0.05D | 1.0D | Vc | 200 | 195 | 205 | 190 | 195 | 205 | 210 | 190 | 210 |
| | | | | | | | fz | 0.022 | 0.023 | 0.028 | 0.033 | 0.04 | 0.04 | 0.041 | 0.039 | 0.039 |
| RPM | 10610 | 7759 | 6525 | | | | 5040 | 4434 | 4078 | 3714 | 3024 | 2674 | | | | |
| FEED | 700 | 535 | 731 | | | | 665 | 709 | 653 | 609 | 472 | 521 | | | | |
| H 40 | Chilled Cast Iron | 0.3D | 1.5D | | | | Vc | 135 | 135 | 135 | 135 | 135 | 140 | 130 | 130 | 145 |
| | | | | | | | fz | 0.022 | 0.022 | 0.028 | 0.034 | 0.039 | 0.038 | 0.039 | 0.038 | 0.038 |
| RPM | | | | 7162 | 5371 | 4297 | 3581 | 3069 | 2785 | 2299 | 2069 | 1846 | | | | |
| FEED | | | | 473 | 355 | 481 | 487 | 479 | 423 | 359 | 314 | 351 | | | | |

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

※ The FEED, in long & extra long types, should be reduced by around 50%




G9400 SERIES

2 FLUTE DRILL MILLS - CHAMFERING

| ISO | VDI 3323 | Material Description | Parameter | Mill Diameter (Ø) | | | | | | | | | |
|---------|------------------------------------|----------------------|-----------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|--|
| | | | | 3.0 | 4.0 | 5.0 | 6.0 | 8.0 | 10.0 | 12.0 | 16.0 | 20.0 | |
| P | 1-2 | Non-alloy steel | Vc | 60 | 65 | 65 | 60 | 60 | 65 | 70 | 70 | 85 | |
| | | | fz | 0.025 | 0.031 | 0.04 | 0.052 | 0.071 | 0.083 | 0.1 | 0.125 | 0.137 | |
| | RPM | | 6366 | 5173 | 4138 | 3183 | 2387 | 2069 | 1857 | 1393 | 1353 | | |
| | FEED | | 318 | 321 | 331 | 331 | 339 | 343 | 371 | 348 | 371 | | |
| | Vc | | 45 | 55 | 55 | 55 | 55 | 55 | 60 | 65 | 65 | | |
| | fz | | 0.023 | 0.027 | 0.036 | 0.043 | 0.058 | 0.073 | 0.091 | 0.105 | 0.14 | | |
| | 3-4 | Non-alloy steel | RPM | 4775 | 4377 | 3501 | 2918 | 2188 | 1751 | 1592 | 1293 | 1035 | |
| | | | FEED | 220 | 236 | 252 | 251 | 254 | 256 | 290 | 272 | 290 | |
| | Vc | | 40 | 45 | 45 | 40 | 40 | 50 | 50 | 50 | 55 | | |
| | fz | | 0.023 | 0.028 | 0.035 | 0.044 | 0.06 | 0.066 | 0.083 | 0.115 | 0.134 | | |
| | RPM | | 4244 | 3581 | 2865 | 2122 | 1592 | 1592 | 1326 | 995 | 875 | | |
| | FEED | | 195 | 201 | 201 | 187 | 191 | 210 | 220 | 229 | 235 | | |
| 5 | Low alloy steel | Vc | 60 | 65 | 65 | 60 | 60 | 65 | 70 | 70 | 85 | | |
| | | fz | 0.025 | 0.031 | 0.04 | 0.052 | 0.071 | 0.083 | 0.1 | 0.125 | 0.137 | | |
| RPM | | 6366 | 5173 | 4138 | 3183 | 2387 | 2069 | 1857 | 1393 | 1353 | | | |
| FEED | | 318 | 321 | 331 | 331 | 339 | 343 | 371 | 348 | 371 | | | |
| Vc | | 45 | 55 | 55 | 55 | 55 | 55 | 60 | 65 | 65 | | | |
| fz | | 0.023 | 0.027 | 0.036 | 0.043 | 0.058 | 0.073 | 0.091 | 0.105 | 0.14 | | | |
| 6 | Low alloy steel | RPM | 4775 | 4377 | 3501 | 2918 | 2188 | 1751 | 1592 | 1293 | 1035 | | |
| | | FEED | 220 | 236 | 252 | 251 | 254 | 256 | 290 | 272 | 290 | | |
| Vc | | 40 | 45 | 45 | 40 | 40 | 50 | 50 | 50 | 55 | | | |
| fz | | 0.023 | 0.028 | 0.035 | 0.044 | 0.06 | 0.066 | 0.083 | 0.115 | 0.134 | | | |
| RPM | | 4244 | 3581 | 2865 | 2122 | 1592 | 1592 | 1326 | 995 | 875 | | | |
| FEED | | 195 | 201 | 201 | 187 | 191 | 210 | 220 | 229 | 235 | | | |
| 7 | High alloyed steel, and tool steel | Vc | 60 | 65 | 65 | 60 | 60 | 65 | 70 | 70 | 85 | | |
| | | fz | 0.025 | 0.031 | 0.04 | 0.052 | 0.071 | 0.083 | 0.1 | 0.125 | 0.137 | | |
| RPM | | 6366 | 5173 | 4138 | 3183 | 2387 | 2069 | 1857 | 1393 | 1353 | | | |
| FEED | | 318 | 321 | 331 | 331 | 339 | 343 | 371 | 348 | 371 | | | |
| Vc | | 45 | 55 | 55 | 55 | 55 | 55 | 60 | 65 | 65 | | | |
| fz | | 0.023 | 0.027 | 0.036 | 0.043 | 0.058 | 0.073 | 0.091 | 0.105 | 0.14 | | | |
| 8-9 | High alloyed steel, and tool steel | RPM | 4775 | 4377 | 3501 | 2918 | 2188 | 1751 | 1592 | 1293 | 1035 | | |
| | | FEED | 220 | 236 | 252 | 251 | 254 | 256 | 290 | 272 | 290 | | |
| Vc | | 40 | 45 | 45 | 40 | 40 | 50 | 50 | 50 | 55 | | | |
| fz | | 0.023 | 0.028 | 0.035 | 0.044 | 0.06 | 0.066 | 0.083 | 0.115 | 0.134 | | | |
| RPM | | 4244 | 3581 | 2865 | 2122 | 1592 | 1592 | 1326 | 995 | 875 | | | |
| FEED | | 195 | 201 | 201 | 187 | 191 | 210 | 220 | 229 | 235 | | | |
| 10 | High alloyed steel, and tool steel | Vc | 60 | 65 | 65 | 60 | 60 | 65 | 70 | 70 | 85 | | |
| | | fz | 0.025 | 0.031 | 0.04 | 0.052 | 0.071 | 0.083 | 0.1 | 0.125 | 0.137 | | |
| RPM | | 6366 | 5173 | 4138 | 3183 | 2387 | 2069 | 1857 | 1393 | 1353 | | | |
| FEED | | 318 | 321 | 331 | 331 | 339 | 343 | 371 | 348 | 371 | | | |
| Vc | | 40 | 45 | 45 | 40 | 40 | 50 | 50 | 50 | 55 | | | |
| fz | | 0.023 | 0.028 | 0.035 | 0.044 | 0.06 | 0.066 | 0.083 | 0.115 | 0.134 | | | |
| 11.1 | High alloyed steel, and tool steel | RPM | 4244 | 3581 | 2865 | 2122 | 1592 | 1592 | 1326 | 995 | 875 | | |
| | | FEED | 195 | 201 | 201 | 187 | 191 | 210 | 220 | 229 | 235 | | |
| Vc | | 30 | 35 | 40 | 35 | 35 | 40 | 40 | 40 | 45 | | | |
| fz | | 0.021 | 0.025 | 0.029 | 0.037 | 0.055 | 0.064 | 0.078 | 0.11 | 0.122 | | | |
| RPM | | 3183 | 2785 | 2546 | 1857 | 1393 | 1273 | 1061 | 796 | 716 | | | |
| FEED | | 134 | 139 | 148 | 137 | 153 | 163 | 166 | 175 | 175 | | | |
| M 14.1 | Stainless steel | Vc | 145 | 160 | 150 | 150 | 155 | 175 | 185 | 195 | 195 | | |
| | | fz | 0.025 | 0.032 | 0.045 | 0.057 | 0.075 | 0.085 | 0.1 | 0.134 | 0.175 | | |
| RPM | | 15385 | 12732 | 9549 | 7958 | 6167 | 5570 | 4907 | 3879 | 3104 | | | |
| FEED | | 769 | 815 | 859 | 907 | 925 | 947 | 981 | 1040 | 1086 | | | |
| Vc | | 145 | 160 | 150 | 150 | 155 | 175 | 185 | 195 | 195 | | | |
| fz | | 0.025 | 0.032 | 0.045 | 0.057 | 0.075 | 0.085 | 0.1 | 0.134 | 0.175 | | | |
| N 21~22 | Aluminum-wrought alloy | RPM | 15385 | 12732 | 9549 | 7958 | 6167 | 5570 | 4907 | 3879 | 3104 | | |
| | | FEED | 769 | 815 | 859 | 907 | 925 | 947 | 981 | 1040 | 1086 | | |
| Vc | | 145 | 160 | 150 | 150 | 155 | 175 | 185 | 195 | 195 | | | |
| fz | | 0.025 | 0.032 | 0.045 | 0.057 | 0.075 | 0.085 | 0.1 | 0.134 | 0.175 | | | |
| RPM | | 15385 | 12732 | 9549 | 7958 | 6167 | 5570 | 4907 | 3879 | 3104 | | | |
| FEED | | 769 | 815 | 859 | 907 | 925 | 947 | 981 | 1040 | 1086 | | | |

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

※ The FEED, in long & extra long types, should be reduced by around 50%




G9400 SERIES

2 FLUTE DRILL MILLS - CHAMFERING & SIDE CUTTING

| ISO | VDI 3323 | Material Description | Parameter | Mill Diameter (Ø) | | | | | | | | |
|------|----------|------------------------|-----------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | 3.0 | 4.0 | 5.0 | 6.0 | 8.0 | 10.0 | 12.0 | 16.0 | 20.0 |
| P | 1-2 | Non-alloy steel | Vc | 80 | 85 | 85 | 80 | 80 | 90 | 95 | 90 | 95 |
| | | | fz | 0.008 | 0.01 | 0.013 | 0.018 | 0.025 | 0.03 | 0.037 | 0.054 | 0.063 |
| | | | RPM | 8488 | 6764 | 5411 | 4244 | 3183 | 2865 | 2520 | 1790 | 1512 |
| | 3-4 | | Vc | 50 | 55 | 55 | 55 | 55 | 55 | 60 | 65 | 60 |
| | | | fz | 0.008 | 0.01 | 0.013 | 0.018 | 0.024 | 0.03 | 0.041 | 0.05 | 0.064 |
| | | | RPM | 5305 | 4377 | 3501 | 2918 | 2188 | 1751 | 1592 | 1293 | 955 |
| | 5 | | Vc | 45 | 50 | 50 | 50 | 45 | 55 | 55 | 55 | 55 |
| | | | fz | 0.008 | 0.009 | 0.012 | 0.017 | 0.025 | 0.027 | 0.036 | 0.046 | 0.06 |
| | | | RPM | 4775 | 3979 | 3183 | 2653 | 1790 | 1751 | 1459 | 1094 | 875 |
| | 6 | | Vc | 80 | 85 | 85 | 80 | 80 | 90 | 95 | 90 | 95 |
| | | | fz | 0.008 | 0.01 | 0.013 | 0.018 | 0.025 | 0.03 | 0.037 | 0.054 | 0.063 |
| | | | RPM | 8488 | 6764 | 5411 | 4244 | 3183 | 2865 | 2520 | 1790 | 1512 |
| 7 | Vc | 50 | 55 | 55 | 55 | 55 | 60 | 65 | 60 | 60 | | |
| | fz | 0.008 | 0.01 | 0.013 | 0.018 | 0.024 | 0.03 | 0.041 | 0.05 | 0.064 | | |
| | RPM | 5305 | 4377 | 3501 | 2918 | 2188 | 1751 | 1592 | 1293 | 955 | | |
| 8-9 | Vc | 45 | 50 | 50 | 50 | 45 | 55 | 55 | 55 | 55 | | |
| | fz | 0.008 | 0.009 | 0.012 | 0.017 | 0.025 | 0.027 | 0.036 | 0.046 | 0.06 | | |
| | RPM | 4775 | 3979 | 3183 | 2653 | 1790 | 1751 | 1459 | 1094 | 875 | | |
| 10 | Vc | 80 | 85 | 85 | 80 | 80 | 90 | 95 | 90 | 95 | | |
| | fz | 0.008 | 0.01 | 0.013 | 0.018 | 0.025 | 0.03 | 0.037 | 0.054 | 0.063 | | |
| | RPM | 8488 | 6764 | 5411 | 4244 | 3183 | 2865 | 2520 | 1790 | 1512 | | |
| 11.1 | Vc | 45 | 50 | 50 | 50 | 45 | 55 | 55 | 55 | 55 | | |
| | fz | 0.008 | 0.009 | 0.012 | 0.017 | 0.025 | 0.027 | 0.036 | 0.046 | 0.06 | | |
| | RPM | 4775 | 3979 | 3183 | 2653 | 1790 | 1751 | 1459 | 1094 | 875 | | |
| M | 14.1 | Stainless steel | Vc | 30 | 35 | 40 | 35 | 40 | 45 | 45 | 45 | 40 |
| | | | fz | 0.008 | 0.01 | 0.013 | 0.018 | 0.024 | 0.027 | 0.036 | 0.046 | 0.069 |
| | | | RPM | 3183 | 2785 | 2546 | 1857 | 1592 | 1432 | 1194 | 895 | 637 |
| N | 21~22 | Aluminum-wrought alloy | Vc | 185 | 210 | 210 | 205 | 205 | 225 | 230 | 230 | 230 |
| | | | fz | 0.008 | 0.01 | 0.013 | 0.019 | 0.03 | 0.037 | 0.045 | 0.05 | 0.064 |
| | | | RPM | 19629 | 16711 | 13369 | 10876 | 8157 | 7162 | 6101 | 4576 | 3661 |
| | 23~25 | Aluminum-cast, alloyed | Vc | 185 | 210 | 210 | 205 | 205 | 225 | 230 | 230 | 230 |
| | | | fz | 0.008 | 0.01 | 0.013 | 0.019 | 0.03 | 0.037 | 0.045 | 0.05 | 0.064 |
| | | | RPM | 19629 | 16711 | 13369 | 10876 | 8157 | 7162 | 6101 | 4576 | 3661 |
| S | 36-37 | Titanium Alloys | Vc | 30 | 35 | 40 | 35 | 40 | 45 | 45 | 45 | 40 |
| | | | fz | 0.008 | 0.01 | 0.013 | 0.018 | 0.024 | 0.027 | 0.036 | 0.046 | 0.069 |
| | | | RPM | 3183 | 2785 | 2546 | 1857 | 1592 | 1432 | 1194 | 895 | 637 |

※ The FEED, in long & extra long types, should be reduced by around 50%




G9400 SERIES

2FLUTE DRILL MILLS - V-GROOVING

| ISO | VDI 3323 | Material Description | Parameter | Mill Diameter (Ø) | | | | | | | | |
|------|----------|------------------------|-----------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | 3.0 | 4.0 | 5.0 | 6.0 | 8.0 | 10.0 | 12.0 | 16.0 | 20.0 |
| P | 1-2 | Non-alloy steel | Vc | 80 | 85 | 85 | 80 | 80 | 90 | 95 | 100 | 95 |
| | | | fz | 0.005 | 0.006 | 0.008 | 0.01 | 0.014 | 0.016 | 0.018 | 0.023 | 0.029 |
| | | | RPM | 8488 | 6764 | 5411 | 4244 | 3183 | 2865 | 2520 | 1989 | 1512 |
| | 3-4 | | Vc | 55 | 60 | 55 | 55 | 55 | 55 | 55 | 65 | 60 |
| | | | fz | 0.004 | 0.004 | 0.006 | 0.007 | 0.012 | 0.014 | 0.02 | 0.022 | 0.028 |
| | | | RPM | 5836 | 4775 | 3501 | 2918 | 2188 | 1751 | 1459 | 1293 | 955 |
| | 5 | | Vc | 45 | 50 | 50 | 50 | 45 | 55 | 55 | 55 | 55 |
| | | | fz | 0.004 | 0.004 | 0.006 | 0.008 | 0.014 | 0.015 | 0.018 | 0.023 | 0.03 |
| | | | RPM | 4775 | 3979 | 3183 | 2653 | 1790 | 1751 | 1459 | 1094 | 875 |
| | 6 | | Vc | 80 | 85 | 85 | 80 | 80 | 90 | 95 | 100 | 95 |
| | | | fz | 0.005 | 0.006 | 0.008 | 0.01 | 0.014 | 0.016 | 0.018 | 0.023 | 0.029 |
| | | | RPM | 8488 | 6764 | 5411 | 4244 | 3183 | 2865 | 2520 | 1989 | 1512 |
| 7 | Vc | 55 | 60 | 55 | 55 | 55 | 55 | 65 | 60 | 60 | | |
| | fz | 0.004 | 0.004 | 0.006 | 0.007 | 0.012 | 0.014 | 0.02 | 0.022 | 0.028 | | |
| | RPM | 5836 | 4775 | 3501 | 2918 | 2188 | 1751 | 1459 | 1293 | 955 | | |
| 8-9 | Vc | 45 | 50 | 50 | 50 | 45 | 55 | 55 | 55 | 55 | | |
| | fz | 0.004 | 0.004 | 0.006 | 0.008 | 0.014 | 0.015 | 0.018 | 0.023 | 0.03 | | |
| | RPM | 4775 | 3979 | 3183 | 2653 | 1790 | 1751 | 1459 | 1094 | 875 | | |
| 10 | Vc | 80 | 85 | 85 | 80 | 80 | 90 | 95 | 100 | 95 | | |
| | fz | 0.005 | 0.006 | 0.008 | 0.01 | 0.014 | 0.016 | 0.018 | 0.023 | 0.029 | | |
| | RPM | 8488 | 6764 | 5411 | 4244 | 3183 | 2865 | 2520 | 1989 | 1512 | | |
| 11.1 | Vc | 45 | 50 | 50 | 50 | 45 | 55 | 55 | 55 | 55 | | |
| | fz | 0.004 | 0.004 | 0.006 | 0.008 | 0.014 | 0.015 | 0.018 | 0.023 | 0.03 | | |
| | RPM | 4775 | 3979 | 3183 | 2653 | 1790 | 1751 | 1459 | 1094 | 875 | | |
| M | 14.1 | Stainless steel | Vc | 30 | 35 | 40 | 35 | 40 | 45 | 45 | 45 | 40 |
| | | | fz | 0.004 | 0.005 | 0.006 | 0.008 | 0.01 | 0.011 | 0.013 | 0.019 | 0.028 |
| | | | RPM | 3183 | 2785 | 2546 | 1857 | 1592 | 1432 | 1194 | 895 | 637 |
| N | 21~22 | Aluminum-wrought alloy | Vc | 185 | 210 | 210 | 205 | 205 | 225 | 230 | 230 | 230 |
| | | | fz | 0.008 | 0.01 | 0.013 | 0.019 | 0.03 | 0.037 | 0.045 | 0.05 | 0.064 |
| | | | RPM | 19629 | 16711 | 13369 | 10876 | 8157 | 7162 | 6101 | 4576 | 3661 |
| | 23~25 | Aluminum-cast, alloyed | Vc | 185 | 210 | 210 | 205 | 205 | 225 | 230 | 230 | 230 |
| | | | fz | 0.008 | 0.01 | 0.013 | 0.019 | 0.03 | 0.037 | 0.045 | 0.05 | 0.064 |
| | | | RPM | 19629 | 16711 | 13369 | 10876 | 8157 | 7162 | 6101 | 4576 | 3661 |
| S | 36-37 | Titanium Alloys | Vc | 30 | 35 | 40 | 35 | 40 | 45 | 45 | 45 | 40 |
| | | | fz | 0.004 | 0.005 | 0.006 | 0.008 | 0.01 | 0.011 | 0.013 | 0.019 | 0.028 |
| | | | RPM | 3183 | 2785 | 2546 | 1857 | 1592 | 1432 | 1194 | 895 | 637 |

※ The FEED, in long & extra long types, should be reduced by around 50%



※ The FEED, in long & extra long types, should be reduced by around 50%



HIGH QUALITY PRODUCTS and ON TIME DELIVERY for WORLD-WIDE CUSTOMERS

Since 1982, YG-1 has committed to quality, innovation and the unique customer experience. Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE



ASIA PACIFIC



AMERICAS



AFRICA



YG-1 CO., LTD.

* For more information on sales network, please contact the head office as below;

YG-1 HEAD OFFICE

211, Sewolcheon-ro, Bupyeong-gu, Incheon, South Korea
 Phone: +82-32-526-0909
 E-mail: yg1@yg1.kr
 www.yg1.kr